

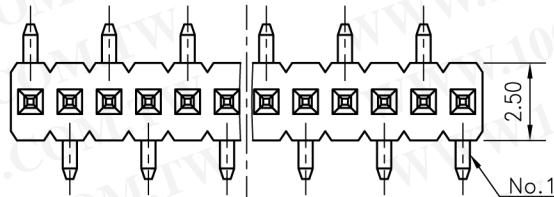



R1 TYPE

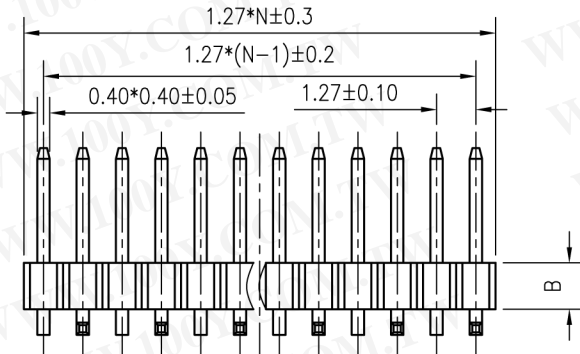


R2 TYPE

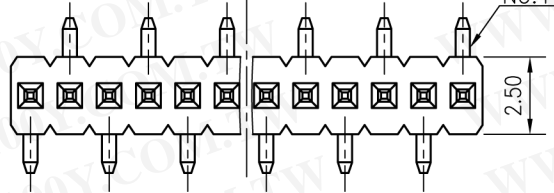

N:No.OF CONTACTS




R1 TYPE



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

R2 TYPE




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 02/21/08'		

NOTES:

1. MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
 - 1.2 CONTACT MATERIAL:COPPER ALLOY
2. SPECIFICATION
 - 2.1 CURRENT RATING:1.0 Amp.
 - 2.2 INSULATION RESISTANCE:500MΩ Min.
 - 2.3 DIELECTRIC WITHSTANDING:300VAC.
 - 2.4 CONTACT RESISTANCE:50mΩ Max.
 - 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.
3. PART NUMBER: DS1031-03
4. PRODUCT NUMBER CODE:

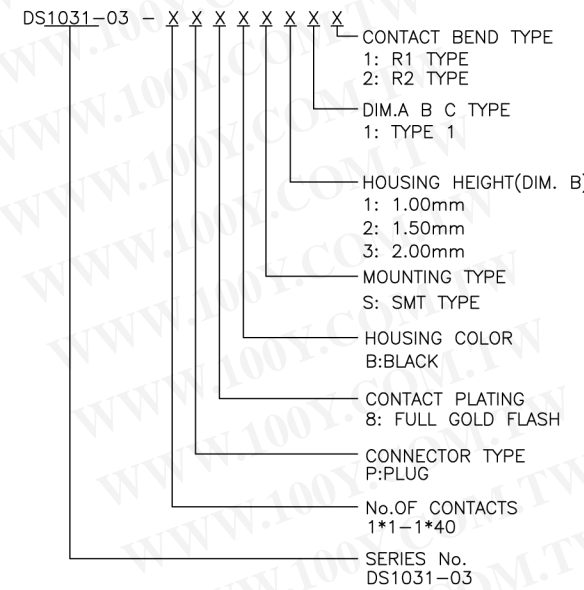

TYPE	DIM A	DIM B	DIM C
1	3.70	5.00	0.40
2			
3			
4			
5			
6			
7			

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm PITCH PIN HEADER
X.	±0.60	X.	±5°	UNITS	mm	SINGLE ROW S.M.T TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1031-03 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1031-03-XXXXXXX					