




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/16/09'		

TERMINAL

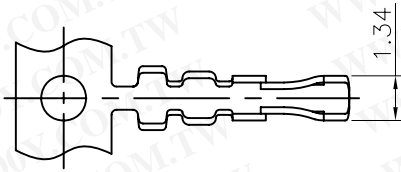

NOTES:

1. MAIN SPECIFICATIONS



- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: $\leq 30m\Omega$
- . Insulation resistance: $\geq 1000M\Omega$
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: $-25 \sim +85^{\circ}C$

2. PRODUCT NUMBER CODE:

DS1071-01 - X X X X X

- Contact Plating
- 6: Full Tin
- 8: Full Gold Flash
- Housing Color
- B: Black
- Mounting type
- C: Crimp
- Connector type
- F: Female
- No. of contact
- 1*1~1*40
- 2*1~2*40

Housing

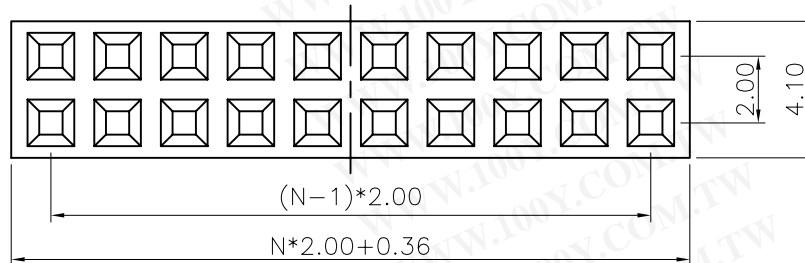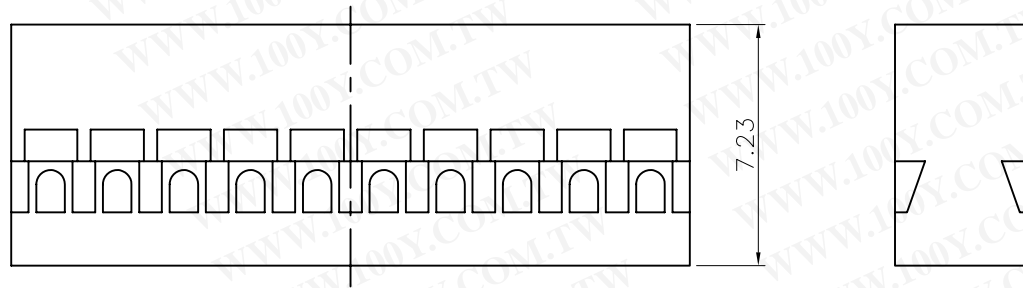

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	± 0.60	X.	$\pm 5^{\circ}$	UNITS	mm	P.C.B CONNECTOR 2.00mm TJC8 TYPE
.X	± 0.38	.X	$\pm 3^{\circ}$	SHEET SIZE	A4	SERIES DS1071-01 SERIES
.XX	± 0.25	.XX	$\pm 2^{\circ}$			
DRAWING TYPE		CUSTOMER				
SCALE		1:1	SHEET	1 OF 1		
DRAWING NO.		C-DS1071-01-XXXXX				