


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

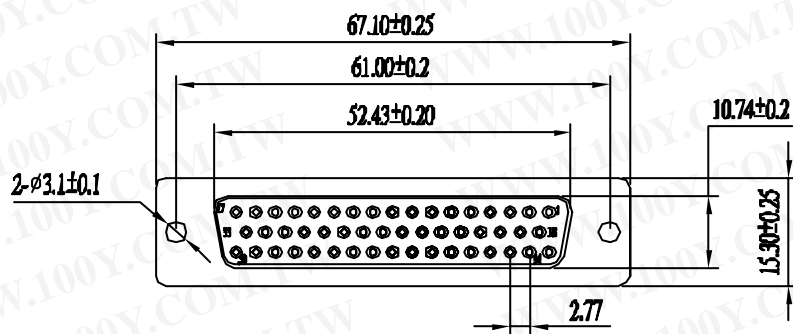

Note:

1.Material:



- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Copper alloy, t=0.20mm.
- 1.3 Shell: Cold rolled steel, t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 9.0 Kgf Max.
- 2.6 Total unmating force: 5.0 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel, tin or gold plated

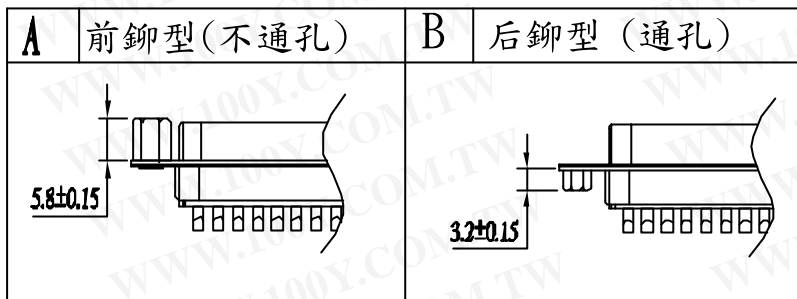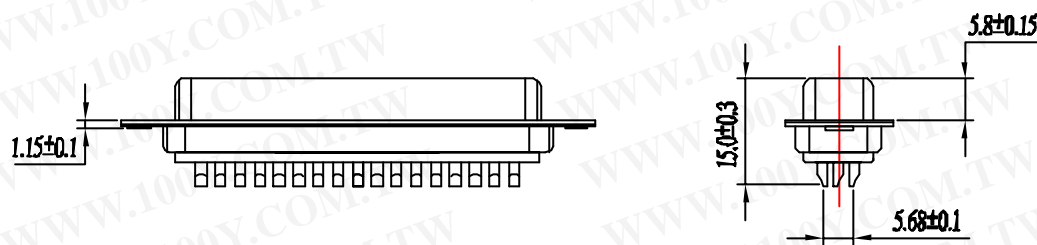

No.	Part Name	Qty	Material	Remarks & Thickness	Finish
6	8.0 Nut	2	Copper alloy	H4.75*8.0	Nickel Plated
5	3B Nut	2	Copper alloy	H4.75*4.75	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	50	Copper alloy	T=0.20mm	Gold Plated
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White

PART NO:		MATERIAL:			
MODEL NO:		FINISH:			
UNIT: mm	SIZE: A4	COLOR:		PART NAME: D-SUB 50PIN SOLDER (F)	
TOLERANCE UNSPECIFIED		DR: Opphaus 202306		DWG NO: HG-DD2-01	
.x ±0.3	.xx ±0.20	CHK: Nick 202306		REV: A0	
.xxx ±0.100	ANG ±1°	APP: Kent 202306		SCALE: 1:1	
		SHEET: 1 of 1			

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)