





勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

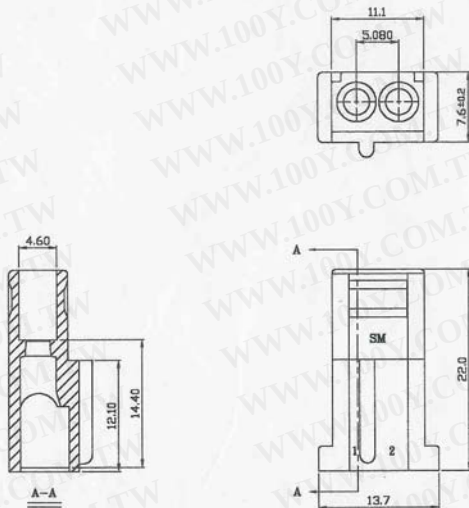

Specifications:

- Poles: 2 Poles
- Pitch Between Poles: 5.08mm
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range: -25°C ~ +85°C
- Contact Resistance: Initial value/10mΩ max
After environmental testing/20mΩ
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 MΩ/min
- Material: Nylon UL94V-2
- Suitable SM 1004T Series Terminal
- Mates With SM 2103W Series Wafer



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specifications:

- Poles: 3 Poles
- Pitch Between Poles: 5.08mm
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range: -25°C $-+85^{\circ}\text{C}$
- Contact Resistance: Initial value/10m Ω max
After environmental testing/20m Ω
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 M Ω /min
- Material: Nylon UL94V-2
- Suitable SM 1004T Series Terminal

PRODUCT NO	REVISION	DATE	DESCRIPTION	UNIT: mm	DRAWING	CHECKED	APPROVAL
------------	----------	------	-------------	----------	---------	---------	----------