
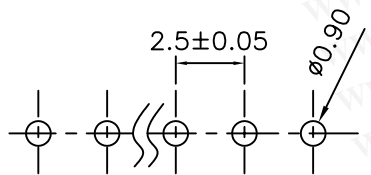
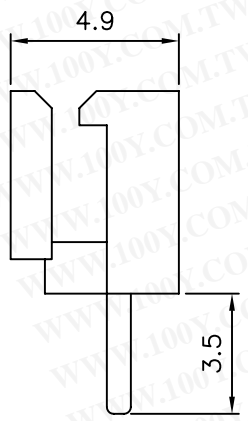
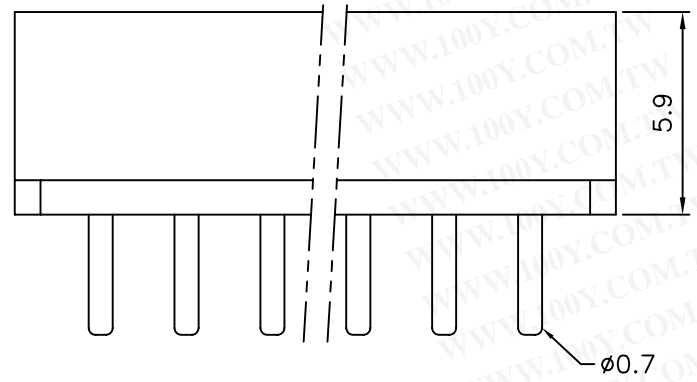


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

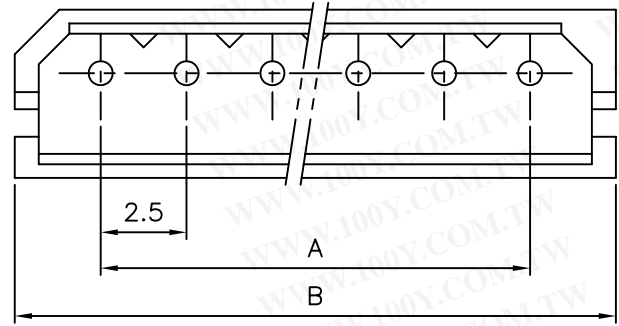

Recommended P.C.B. Hole Layout

Poles	Ordering code	Dimension in.(mm)	
		A	B
2	2507-WS-02-LF	0.098( 2.5)	0.295( 7.5)
3	2507-WS-03-LF	0.197( 5.0)	0.393(10.0)
4	2507-WS-04-LF	0.295( 7.5)	0.492(12.5)
5	2507-WS-05-LF	0.394(10.0)	0.591(15.0)
6	2507-WS-06-LF	0.492(12.5)	0.689(17.5)
7	2507-WS-07-LF	0.591(15.0)	0.787(20.0)
8	2507-WS-08-LF	0.689(17.5)	0.886(22.5)
9	2507-WS-09-LF	0.787(20.0)	0.984(25.0)
10	2507-WS-10-LF	0.886(22.5)	1.083(27.5)
11	2507-WS-11-LF	0.984(25.0)	1.181(30.0)
12	2507-WS-12-LF	1.083(27.5)	1.280(32.5)
13	2507-WS-13-LF	1.181(30.0)	1.378(35.0)
14	2507-WS-14-LF	1.280(32.5)	1.476(37.5)
15	2507-WS-15-LF	1.378(35.0)	1.575(40.0)

**WAFER** **RoHS COMPLIANT**

Part No: PEC 2507-WS-XX-LF  
 Poles: 2-15  
 Material: Past: Brass, Tin/Plated  
 Base: Nylon 66, UL94V-0 Tooth Gray  
 Q'TY: 500, 1000 pcs/bag

**SPECIFICATIONS**

Voltage rating: 250V AC,DC  
 Current rating:

AWG	22	24	26	28
Amperes	3.0	2.5	2.0	1.5

Withstand voltage: AC 1000 V/min.  
 Insulation resistance: 1000 MΩ min.  
 Temperature range: -40°C~+105°C  
 Applicable PC board thickness: 0.8~1.6mm  
 Contact resistance: Initial value/10 mΩ max.  
 After environmental Testing/20 mΩ max.

ECN NO.:			
FILE PATH:D:\pec\clipart			
		SCALE	5 : 1
		DRAWN BY:	KAN
		APPROVED BY:	
		GENERAL TOLERANCE:	
		ANGLE:	DIM:
A	NEW RELEASE	05.07.07	X.X ± 0.25
REV	REVISION RECORD	DATE	X.XX ± 0.15
			X.XXX ± 0.05
			TITLE:
			P.C.BOARD CONNECTOR
			STRAIGHT TYPE