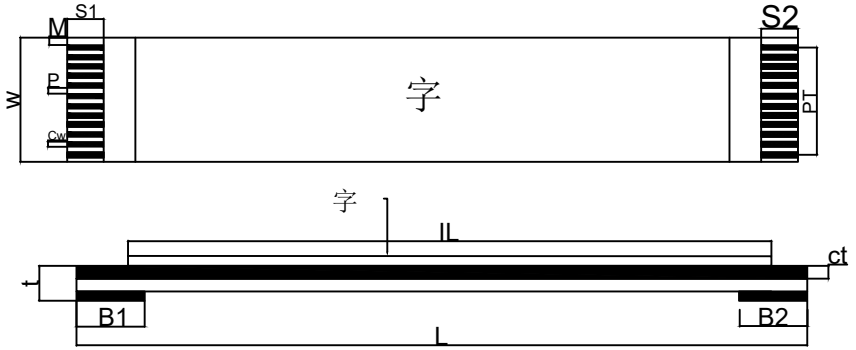



CUSTOMER(客户)			Part Descripon(部品规格): A 0.5*64P*600 4/4/8/8 0.225 0.035*0.3 T60+60			
Item	项目	Specification	规格值			
NO.of conductors	导体芯数 N		64			
Pitch	间距 P		0.5±0.05			
Total Pitch	全间距 PT		31.5±0.06			
Total Length	总长度 L		600±2			
Total Length	绝缘长度 IL		584±2			
Margin Width	边缘宽度 M		0.5±0.05			
Total Width	总宽度 W		32.5±0.06			
Strip Length	线口长度 S1		4±0.5			
Strip Length	线口长度 S2		4±0.5			
Reinforeing tape length	补强板长度 B1		8±1			
Reinforeing tape length	补强板长度 B2		8±1			
Slanting	线口倾斜度 A		≤0.3			
Over lap	冲孔					
Terminal thickness	插入厚度 t1		0.31±0.05			
Thickness insulation	线身厚度 t		0.15±0.05			
Conductor thickness	导体厚度 Ct		0.035±0.005			
Conductor width	导体宽度 Cw		0.3±0.03	Storage condition(储存条件): Recommended(推荐)		
Supporting Tapc Color	补强板颜色		蓝色 (Blue)	Temp:15℃~25℃ Humidity:30~60RH%		
PET(Supporting Tapc Color)	补强板规格		0.225mm		日期	修订日期
PET(Insulation)	绝缘胶规格		0.06mm 膜		2025-8-28	20250828-01
PET(Insulation)	绝缘胶规格		0.06mm 膜			
Rev	版本		A			