

**HAMAMATSU**  
 PHOTON IS OUR BUSINESS

## UVTRON® DRIVING CIRCUIT C10807 SERIES

Compact, Lightweight, Low Current Consumption  
 Ideal for Fire and Arson Surveillance

### FEATURES

C10807 series was developed for UVTRON driving circuit as alternative to C3704, that is also used as singal processing circuits. By using a double-sided printed circuit board we cut the area size to half that of conventional drive circuits. Since the high-voltage supply and signal processor are mounted on the same circuit board, the C10807 can be operated as a high-sensitivity UV sensor just by connecting a UVTRON and supplying a low DC voltage. The signal processing circuit cancels out background discharges which may occur in the UVTRON due to natural excitation light (cosmic rays, solar UV rays, etc.). This minimizes erroneous detection so the C10807 output signal can be used without additional filtering. Combining the C10807 with a high-sensitivity "UVTRON R9533, R2868" (sold separately) for use as a flame detector yields sensitivity capable of detecting the flame from a cigarette lighter (flame length 25 mm) even at distances up to 5 meters away.



### APPLICATIONS


- Flame detectors for gas and oil lighters
- Fire alarms
- Arson watch monitor
- Combustion monitors for burners
- Electric spark detector

### SPECIFICATIONS

Parameter	Description / Value	Unit
Output Signal	Open Collector Output (50 V, 80 mA) 10 ms with pulse output ④	—
UVTRON Supply Voltage	350 ⑤	V
Quenching Time	Approx. 25	ms
Suitable UVTRON	R9533, R2868 (sold separately)	—
Operating Ambient Temperature ⑥	-10 to +50	°C
Input Voltage (DC)	C10807 12 to 24 C10807-01 5 ± 0.25 C10807-02 6 to 9	V
Current Consumption (Max.)	C10807 4 C10807-01 0.3 C10807-02 0.3	mA
Weight	Approx. 12	g

- NOTE: ④The output pulse width can be extended up to about 10 s by adding a capacitor to the circuit board.  
 ⑤Since the output impedance of this power supply is extremely high, an ordinary voltmeter cannot be used. Use a voltmeter that has an input impedance of more than 10 GΩ.  
 ⑥No condensation

Figure 1: DIMENSIONAL OUTLINE (Unit: mm)

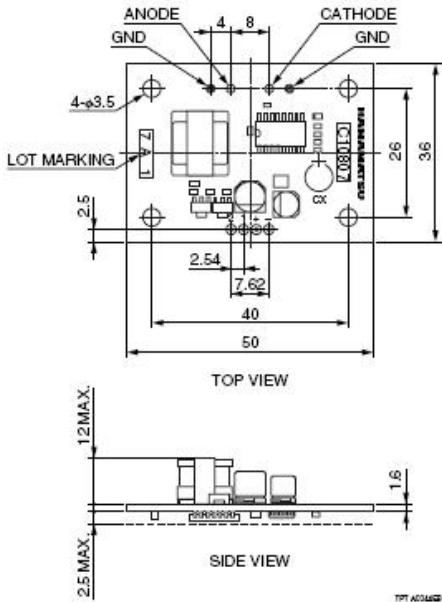

[Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.]  
 Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2012 Hamamatsu Photonics K.K.

## UVTRON® DRIVING CIRCUIT C10807 SERIES

Figure 2: Schematic Diagram


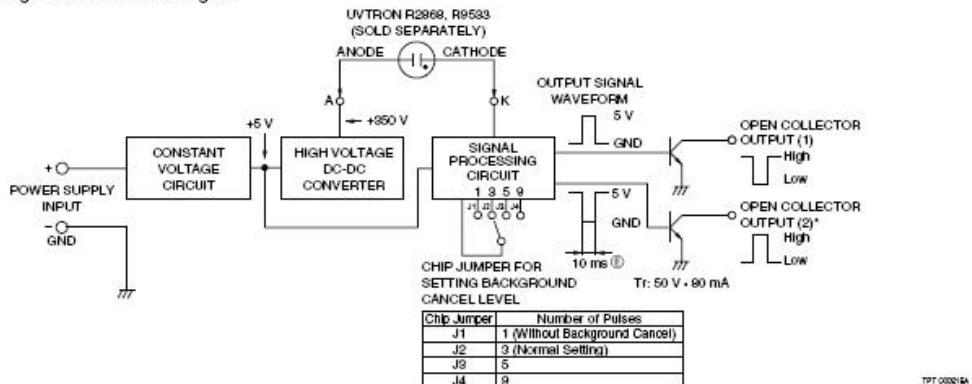


Figure 3: Method of Connection

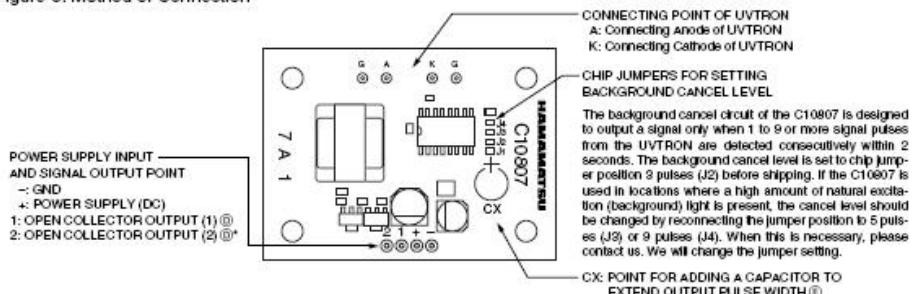

### PRECAUTIONS FOR USE

- Since the operation impedance is extremely high, the UVTRON should be connected as close as possible to the circuit board within 5 cm.
- Take care to avoid external noise since a C-MOS IC is used in the circuit. It is recommended that the whole PC board be put in the shield box when it is used.
- The DC-DC converter type high-voltage supply for this unit has a very high impedance. If the ambient humidity is high, then electrical leakage on the printed circuit board surface might lead to a drop in the supply voltage to the UVTRON. This voltage drop might cause lower sensitivity or malfunctions. If using the unit in a high humid environment apply a silicon-based moisture-proof coating to the UVTRON connection terminals.

**HAMAMATSU PHOTONICS K.K.** [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 430-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205  
U.S.A.: Hamamatsu Corporation 856 Foothill Road, P. O. Box 8910, Bridgewater, NJ 08807-0910, U.S.A., Telephone: (1)908/231-1218, Fax: (1)908/231-1218, E-mail: usa@hamamatsu.com  
Germany: Hamamatsu Photonics Deutschland GmbH, Arzbürgweg 10, D-6221 Herrsching am Ammersee, Germany, Telephone: (49)8153-375-0, Fax: (49)8153-325-9, E-mail: info@hamamatsu.de  
France: Hamamatsu Photonics France S.A.R.L., 19, Rue du Soule Trapu, Parc du Moulin de Massy, 91192 Massy Cedex, France, Telephone: (33)1 69 63 71 00, Fax: (33)1 69 63 71 10, E-mail: info@hamamatsu.fr  
United Kingdom: Hamamatsu Photonics UK Limited, 2 Howes Court, 10 Twin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: 44(0)1707-294888, Fax: 44(0)1707-325777, E-mail: info@hamamatsu.co.uk  
North Europe: Hamamatsu Photonics Norden AB, Thorhammarsgatan 35 SE-184 40 Kista, Sweden, Telephone: (46)8-519-031-00, Fax: (46)8-519-031-01, E-mail: info@hamamatsu.se  
Italy: Hamamatsu Photonics Italia S.R.L., Strada delle Mole, 1/E, 20030 Arzago (Milano), Italy, Telephone: (39)03-935 81 733, Fax: (39)03-935 81 741, E-mail: info@hamamatsu.it  
China: Hamamatsu Photonics (China) Co., Ltd, 1201 Tower B, Juning Center, 27 Dongsi South Street, Chaoyang District, Beijing 100029, China, Telephone: (86)10-656-6006, Fax: (86)10-656-6288, E-mail: tp@hamamatsu.com.cn FEB. 2013 IP

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-34970699  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)