


Schottky Barrier Diodes

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @ $I_F = 10 \text{ mA}$



BAT54RLT1

**30 VOLTS
SILICON HOT-CARRIER
DETECTOR AND
SWITCHING
DIODES**



CASE 318-08, STYLE 8
SOT-23 (TO-236AB)

DEVICE MARKING

BAT54RLT1 = LV3

MAXIMUM RATINGS ($T_A = 125^\circ\text{C}$ unless otherwise noted)


Rating	Symbol	Value	Unit
Reverse Voltage	V_R	30	Volts
Forward Power Dissipation @ $T_A = 25^\circ\text{C}$	P_F	200	mW
Derate above 25°C		2.0	$\text{mW}/^\circ\text{C}$
Operating Junction	T_J		
Temperature Range		-55 to +125	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ($I_R = 10 \mu\text{A}$)	$V_{(BR)R}$	30	—	—	Volts
Total Capacitance ($V_R = 1.0 \text{ V}$, $f = 1.0 \text{ MHz}$)	C_T	—	7.6	10	pF
Reverse Leakage ($V_R = 25 \text{ V}$)	I_R	—	0.5	2.0	μA
Forward Voltage ($I_F = 0.1 \text{ mA}$)	V_F	—	0.22	0.24	Vdc
Forward Voltage ($I_F = 30 \text{ mA}$)	V_F	—	0.41	0.5	Vdc
Forward Voltage ($I_F = 100 \text{ mA}$)	V_F	—	0.52	1.0	Vdc
Reverse Recovery Time ($I_F = I_R = 10 \text{ mA}$, $I_{R(\text{REC})} = 1.0 \text{ mA}$) Figure 1	t_{rr}	—	—	5.0	ns
Forward Voltage ($I_F = 1.0 \text{ mA}$)	V_F	—	0.29	0.32	Vdc
Forward Voltage ($I_F = 10 \text{ mA}$)	V_F	—	0.35	0.40	Vdc

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

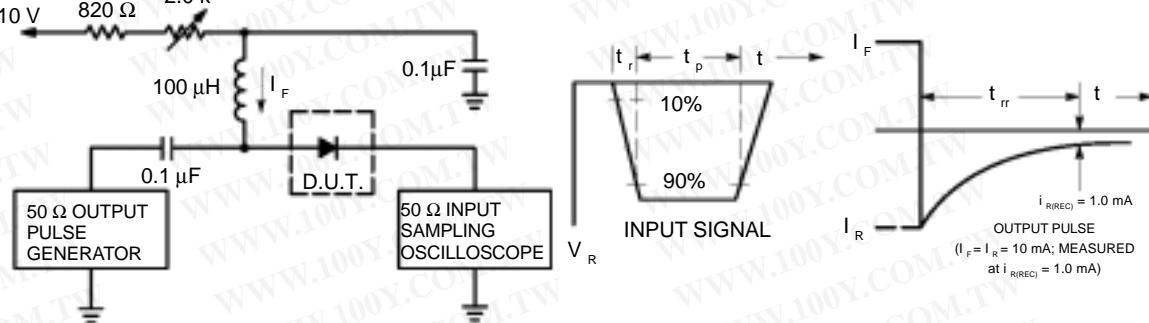BAT54RLT1


Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10mA.

2. Input pulse is adjusted so $I_{R(\text{peak})}$ is equal to 10mA.

3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

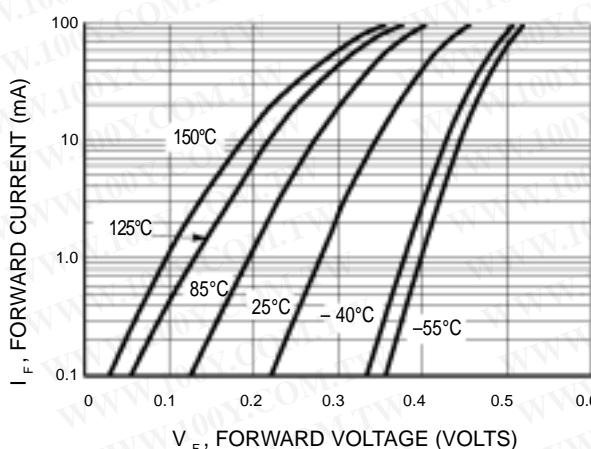


Figure 2. Forward Voltage

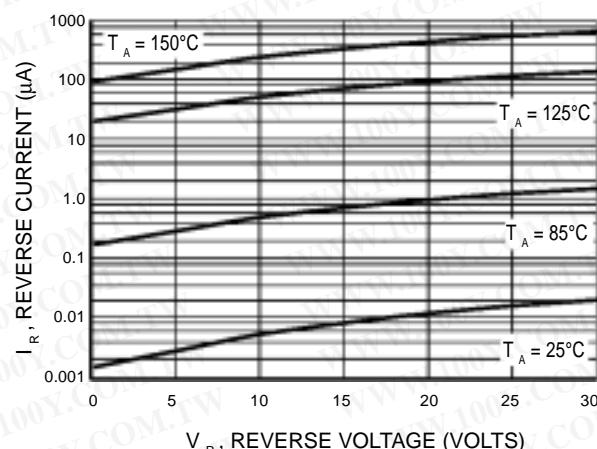


Figure 3. Leakage Current

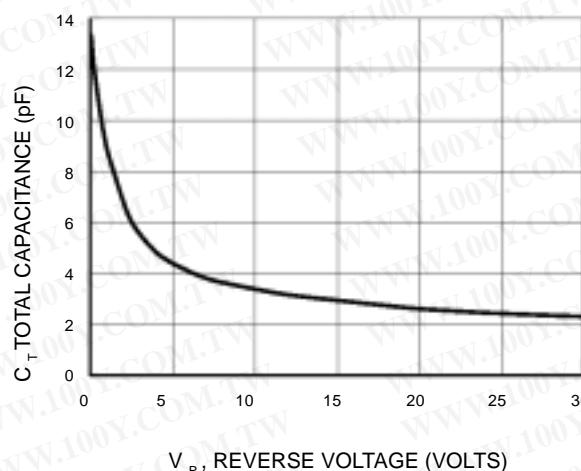


Figure 4. Total Capacitance