# BRIGHT LED ELECTRONICS CORP.

BL-B5334-AT

### Features:

1. Chip material: GaP/GaP

2. Emitted color : Bright Red

3. Lens Appearance: Water Clear

4. Low power consumption.

5. High efficiency.

6. Versatile mounting on P.C. Board or panel.

Low current requirement.

8. 5mm diameter package.


9. Service life of 100,000 hours.

 This product don't contained restriction substance, compliance ROHS standard.

## Applications:

- 1. TV set
- 2. Monitor
- 3. Telephone
- 4. Computer
- Circuit board

### Package dimensions

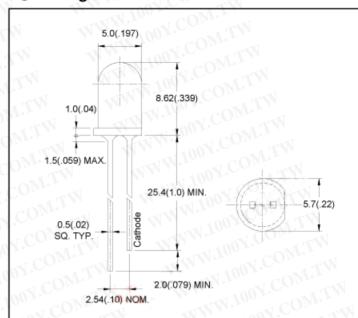

#### Notes

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25mm (0.01") unless otherwise specified.
- Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

# ■ Absolute maximum ratings(Ta=25°C)

Parameter	Symbol	Rating	<b>Unit</b> mW		
Power Dissipation	Pd	40			
Forward Current	OOX. OF TY	WWW30 WY.COM	mA		
Peak Forward Current*1	1007F	50 00 CO	mA		
Reverse Voltage	100V <sub>R</sub>	W 5 100 Y.Co	V		
Operating Temperature	Topr	-40℃~85℃			
Storage Temperature	Tstg	-40℃~100℃			
Soldering Temperature	Tsol	260°C max (for 5 seconds)			
Hand Soldering Temperature	Tsol	350℃ max(for 3 seconds )			

<sup>\*1</sup>Condition for I<sub>FP</sub> is pulse of 1/10 duty and 0.1msec width.


# BRIGHT LED ELECTRONICS CORP.


BL-B5334-AT

Electrical and optical characteristics(Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	MMM	2.3	2.6	V
Luminous Intensity	lv .C	I <sub>F</sub> =20mA	-WW	10	VIIV	mcd
Reverse Current	IR	V <sub>R</sub> =5V	- 11/1	W. Tooy.	100	μA
Peak Wave Length	λp	I <sub>F</sub> =20mA	- W	700	COMETIN	nm
Dominant Wave Length	λd	I <sub>F</sub> =20mA	- 1	650	L.CON	nm
Spectral Line Half-width	Δλ	I <sub>F</sub> =20mA	W	100	N.Com	N nm
Viewing Angle	2θ <sub>1/2</sub>	I <sub>F</sub> =20mA	- W	12	ON.COM	deg

## Typical electro-optical characteristics curves





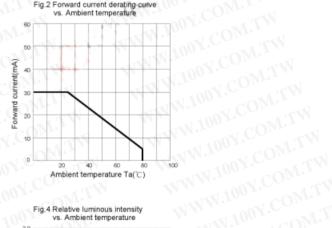


Fig.3 Forward current vs. Forward voltage




Fig.4 Relative luminous intensity vs. Ambient temperature




Fig.5 Relative luminous intensity vs. Forward current




Fig.6 Radiation diagram

