勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

Transistor

DTA144EM / DTA144EE / DTA144EUA / DTA144EKA / DTA144ESA

-100mA / -50V Digital transistors (with built-in resistors) DTA144EM / DTA144EE / DTA144EUA / DTA144EKA / DTA144ESA

Applications

Inverter, Interface, Driver

Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see the equivalent circuit).
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on / off conditions need to be set for operation, making the device design easy.


Structure

PNP epitaxial planar silicon transistor (Resistor built-in type)


Packaging specifications

	Package	VMT3	EMT3	UMT3	SMT3	SPT	
	Packaging type	Taping	Taping	Taping	Taping	Taping	
	Code	T2L	TL	T106	T146	TP	
Туре	Basic ordering unit (pieces)	8000	3000	3000	3000	5000	
DTA144E	DTA144EM			17		-	
DTA144EE		N -2	0	05-	1	-	
DTA144EUA		- S ⁺	10 F.	0	. 1. 2	-	
DTA144E	KA	1 2	1	<u>197</u>	0	-	
DTA144E	DTA144ESA		100	CO	1.5	0	
	~	NN 1					

•Equivalent circuit



•External dimensions (Unit : mm)

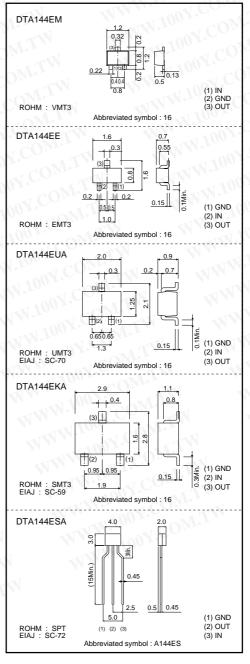

ROHM

1/2

DTA144EM / DTA144EE / DTA144EUA / DTA144EKA / DTA144ESA

Transistor


Absolute maximum ratings (Ta=25°C)


Parameter	Symbol	av.10	Unit			
	0,11100	DTA144EMDTA144EED	10			
Supply voltage	Vcc	-50			V	
Input voltage	Vin	-40 to +10			V	
	lo	-30				
Output current	IC(Max.)	WW.IO	-100		mA	
Power dissipation	Pd	150	200	300	mW	
Junction temperature	Tj	WW 100	150		°C	
Storage temperature	Tstg	WW.Io-	-55 to +150	N	°C	
eterage temperature	Totg		00 10 1100			


Electrical characteristics (Ta=25°C)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
COMP.	VI(off)		- {↓	-0.5	0.5 - V	Vcc=–5V, Io=–100μA	
Input voltage	VI(on)	-3.0		N.10		Vo=-0.3V, Io=-2mA	
Output voltage	VO(on)		-0.1	-0.3	V	lo/l=–10mA/–0.5mA	
Input current	- II	-	. – 1	-0.18	mA	Vi=-5V	
Output current	IO(off)	-	12	-0.5	μA	Vcc=-50V, VI=0V	
DC current gain	Gi	68	- - N	N _	0(71	Vo=-5V, Io=-5mA	
Input resistance	R1	32.9	47	61.1	kΩ	NWW - COM-	
Resistance ratio	R2/R1	0.8	1	1.2	N - 10	CON-	
Transition frequency	f⊤*	N _	250		MHz	Vce=-10V, Ie=5mA, f=100MHz	


Electrical characteristic curves






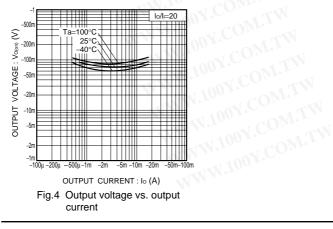





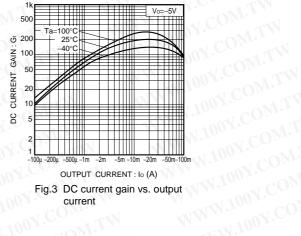

WWW.100Y.COM.TW

ROHM

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

Appendix

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein
 - are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.