



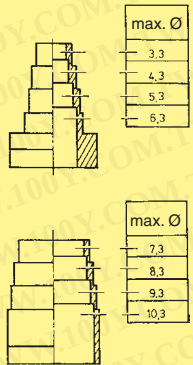
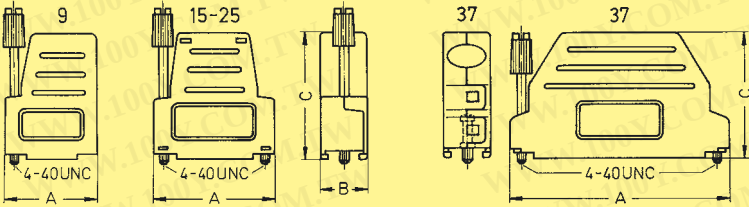
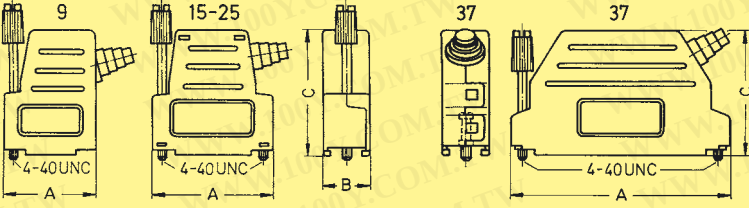

9-50




Identification	No. of contacts	Part No.	
Performance levels Explanations see page 05.04 Other performance levels on request		Performance level 3	Performance level 2
Male connector metal shell with dimples		turned contacts	turned contacts
	9	09 67 009 5604	09 67 009 5615
	15	09 67 015 5604	09 67 015 5615
	25	09 67 025 5604	09 67 025 5615
	37	09 67 037 5604	09 67 037 5615
	50	09 67 050 5604	09 67 050 5615
		stamped contacts	stamped contacts
	9	09 67 209 5604	09 67 209 5615
	15	09 67 215 5604	09 67 215 5615
	25	09 67 225 5604	09 67 225 5615
37	09 67 237 5604	09 67 237 5615	
50	09 67 250 5604	09 67 250 5615	
Female connector metal shell		turned contacts	turned contacts
	9	09 67 009 4704	09 67 009 4715
	15	09 67 015 4704	09 67 015 4715
	25	09 67 025 4704	09 67 025 4715
	37	09 67 037 4704	09 67 037 4715
	50	09 67 050 4704	09 67 050 4715
		stamped contacts	stamped contacts
	9	09 67 209 4704	09 67 209 4715
	15	09 67 215 4704	09 67 215 4715
	25	09 67 225 4704	09 67 225 4715
37	09 67 237 4704	09 67 237 4715	
50	09 67 250 4704	09 67 250 4715	




Top and side entry hoods with knurled screws

Identification	No. of contacts	Part No.	Drawing	Dimensions in mm																																				
Top entry hood Black thermoplastic	9 15 25 37 50	09 67 009 0424 09 67 015 0424 09 67 025 0424 09 67 037 0424 09 67 050 0424		<table><tr><th></th><th>A</th><th>B</th><th>C</th><th>D</th><th>max. Ø</th></tr><tr><td>9</td><td>30.5</td><td>15</td><td>38</td><td>49</td><td>8.5</td></tr><tr><td>15</td><td>41.0</td><td>15</td><td>38</td><td>49</td><td>11.5</td></tr><tr><td>25</td><td>54.5</td><td>15</td><td>40</td><td>49</td><td>11.5</td></tr><tr><td>37</td><td>71.0</td><td>15</td><td>40</td><td>49</td><td>11.5</td></tr><tr><td>50</td><td>67.5</td><td>19</td><td>40</td><td>49</td><td>14.0</td></tr></table>		A	B	C	D	max. Ø	9	30.5	15	38	49	8.5	15	41.0	15	38	49	11.5	25	54.5	15	40	49	11.5	37	71.0	15	40	49	11.5	50	67.5	19	40	49	14.0
	A	B	C	D	max. Ø																																			
9	30.5	15	38	49	8.5																																			
15	41.0	15	38	49	11.5																																			
25	54.5	15	40	49	11.5																																			
37	71.0	15	40	49	11.5																																			
50	67.5	19	40	49	14.0																																			
Top entry hood Metallized thermoplastic	9 15 25 37	09 67 009 0425 09 67 015 0425 09 67 025 0425 09 67 037 0425		 Cut appropriate cable entry to fit actual cable diameter																																				
Top and side entry hood Black thermoplastic	9 15 25 37	09 67 009 0434 09 67 015 0434 09 67 025 0434 09 67 037 0434 ²⁾		<table><tr><th></th><th>A</th><th>B</th><th>C</th></tr><tr><td>9</td><td>31.5</td><td>15</td><td>40.0</td></tr><tr><td>15</td><td>40.0</td><td>15</td><td>40.0</td></tr><tr><td>25</td><td>53.5</td><td>15</td><td>43.0</td></tr><tr><td>37</td><td>71.3</td><td>15</td><td>42.5</td></tr></table>		A	B	C	9	31.5	15	40.0	15	40.0	15	40.0	25	53.5	15	43.0	37	71.3	15	42.5																
	A	B	C																																					
9	31.5	15	40.0																																					
15	40.0	15	40.0																																					
25	53.5	15	43.0																																					
37	71.3	15	42.5																																					
Top and side entry hood¹⁾ Metallized thermoplastic	9 15 25 37	09 67 009 0435 09 67 015 0435 09 67 025 0435 09 67 037 0435 ²⁾																																						
Grommet for top and side entry black thermoplastic hood (15, 25, 37 ways)		09 67 001 9968																																						

¹⁾ Not normally kept in stock²⁾ 37 ways is only side entry



							Dat.	Name		D-Sub, Top entry hood with knurled screws 9 poles Thermoplastic black	Maßstab/ Scale 1:1
						Detail.	28-MAR-02	CV			
						Insp.					
						Stand.					
09 67 009 0426	M3		31085	4-SEP-02	CV	HARTING EURL F-95972 Paris				TB 0967009042x	Blatt/ Page 1 /
09 67 009 0424	4-40 UNC		29760	28-MAR-02	CV						
Part number	Screw thread		Mod.	Dat.	Name						

5

4


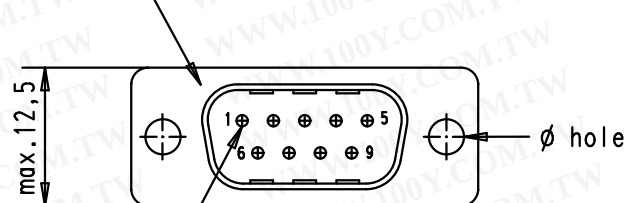
3

2

1

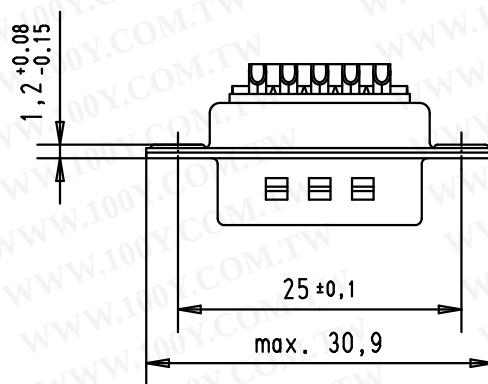
勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802



No.1 contact

Max wire ϕ 1,05 mm




D

C

B

A

						Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, Male, Straight 09 Poles with stamped solder buckets and hole	Maßstab/ Scale 1.5:1
						Detail.	24-APR-02	CV		
						Insp.	28-APR-11	JB		
						Stand.				
09 67 209 5615	3,1 ^{+0,1}	2	EC02094	28-APR-11	SD	HARTING EURL F-95972 Paris			TB 096720956xx	Blatt/ Page 1
09 67 209 5604	3,1 ^{+0,1}	3	31526	21-JUL-03	TCP					
			29777	24-APR-02	CV					
Part number	ϕ hole	Performance level	Mod.	Dat.	Name				Sub.	

