

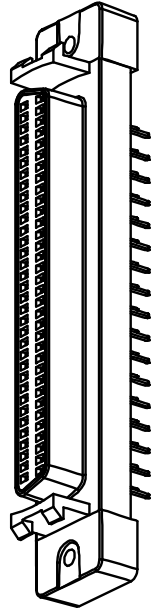


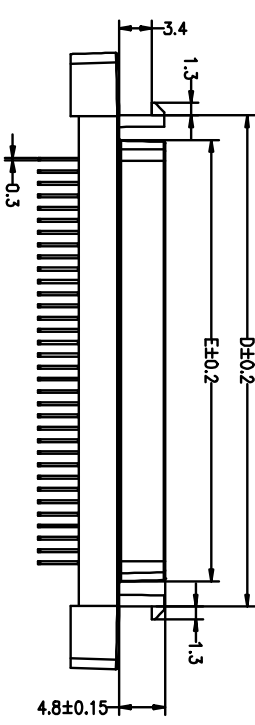


RoHS Compliant

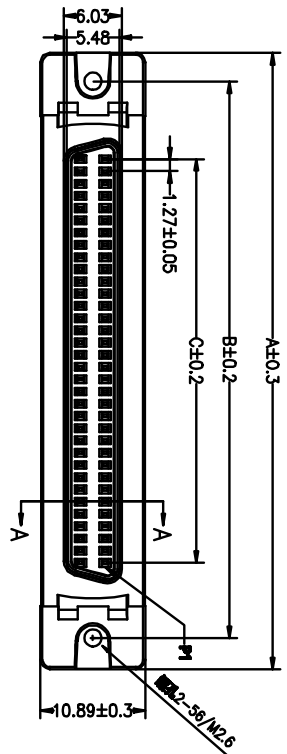

SPECIFICATIONS

Housing: Thermoplastic, UL94V-0 (PBT)
 Color: Black
 Contact: Copper Alloy
 Shell: Zinc Alloy
 Voltage Current Rating: 1.0Amp, 250V AC
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 35mΩ Max.
 Dielectric Withstanding Voltage: 500V AC
 Temperature Range: -40°C to +105°C

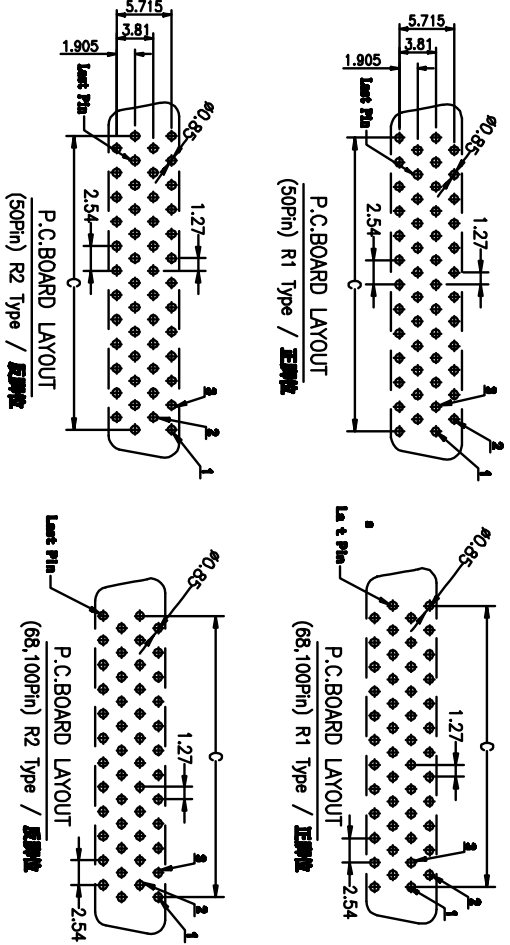

目录 INDEX	设计内容 MODIFICATION	日期 DATE	修改人 DRAW	核准 APPROVE
-------------	----------------------	------------	-------------	---------------

No. of Pin	DIMENSIONS				
	A	B	C	D	R
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.20	77.70	62.23	71.20	66.10

公差一览表

公称尺寸	公差	公差	公差
X	±0.35	±0.5°	±5°
XX	±0.30	±0.2°	±2°
XXX	±0.25	±0.1°	±1°
XXX	±0.02	±0.05°	±0.5°

单位: mm
 公差: ±0.1
 比例: 1:1
 版本: M0
 日期: 2020.03.31

胜特力材料 886-3-5773766
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

电子有限公司
 ON ELECTRONIC CO., LTD
 SCS1 DB 68P 180°