


For Nylon Cable Tie

Heavy duty use.

With safe stop to prevent from injury.

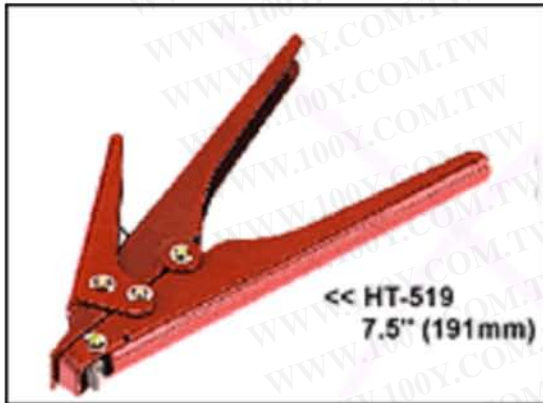

HT-519

FOR CABLE TIE THICKNESS UP TO 2.3mm & WIDTH UP TO 9.5mm WITH SINGLE SPRING LOADED AND COMFORTABLE HAND FORCE

Assembling line use.



HT-218

FOR CABLE TIE FROM 2.2 TO 4.8mm.WIDTH, AND THICKNESS UP TO 1.6mmFASTEN AND AUTOMATIC CUT TIES, WITHADJUSTABLE BUNDLING PRESSURE.




HT-2081

FOR CABLE TIE THICKNESW UP TO 2.3mm.FRAME MADE BY STEEL, HARDEN & BLACKOXIDE FINISHED

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

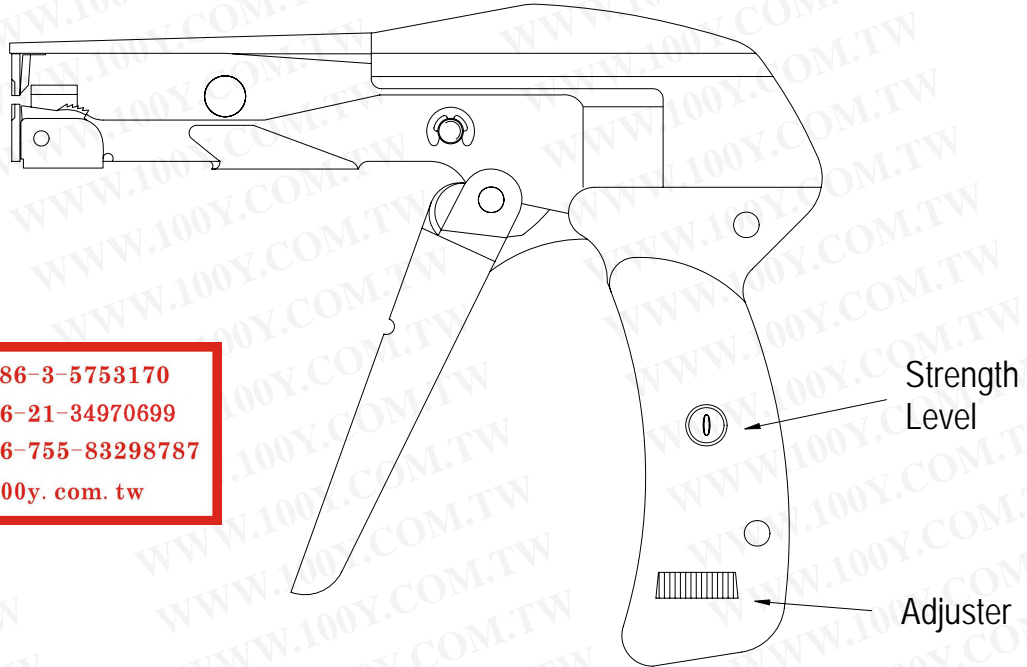

\* Item : HT-218

Install Cable Tie From 2.2 To 4.8mm Width,  
And Up To 1.6mm Thickness

Tension Strength:

Strength Level	Cable Tie Width	Tension Strength Minimum
0	2.2mm	4.5Kgs
1	2.5mm	6.0Kgs
2	3.6mm	9.5Kgs
3	4.8mm	11.0Kgs

\* Dimension : 160x130x20 mm

\* Material :

1. Main Body Made Of Aluminum And Painting By Red Color.
2. Cutter Made Of Middle Carbon Steel.
3. Ratchet Made Of Power Alloy.
4. Other Steel Parts Finished By Black Oxide.

\* Hardness : Cutter HRC46-50
