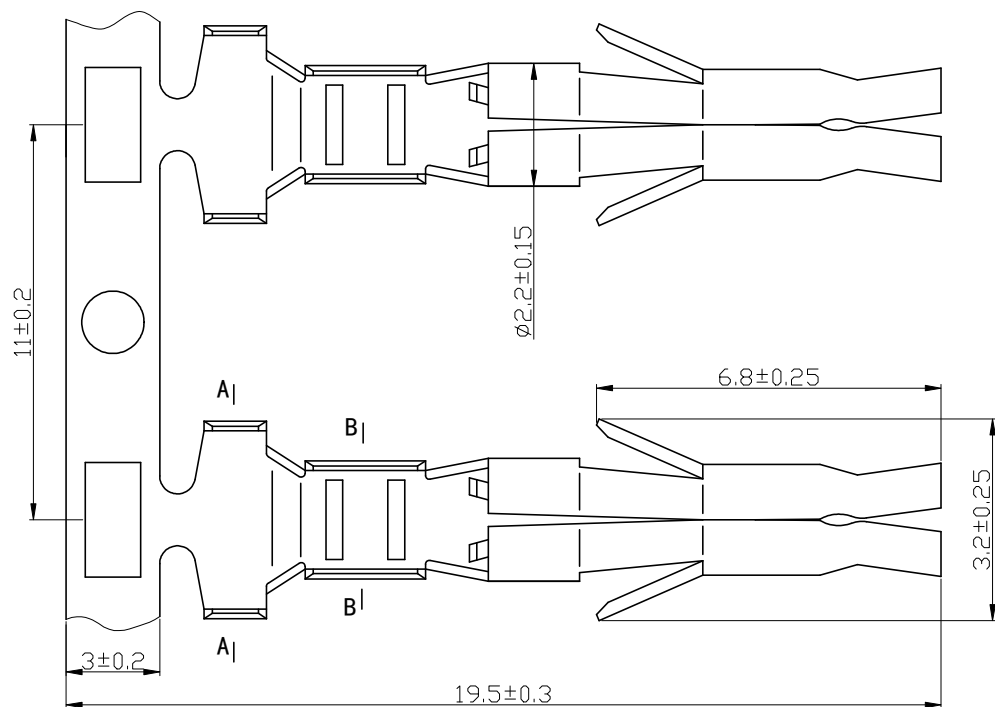

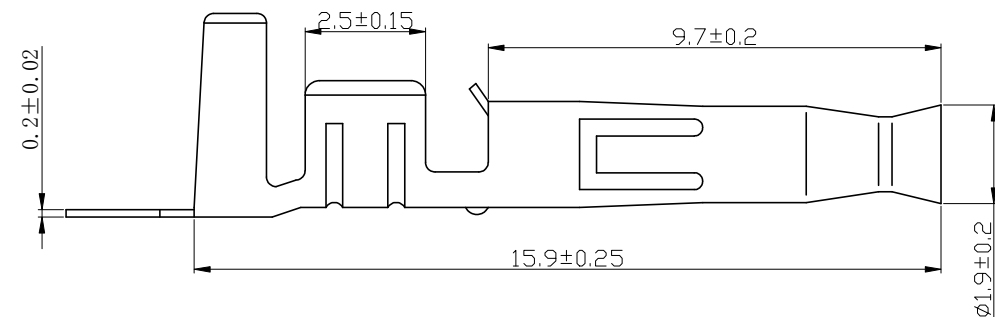


技术要求Specification:

- 1、材质 Material: 磷铜 C5191(QSn6.5-0.1)
- 2、表面处理 Surface Plating: NiSn
- 3、额定电流 Current rating: 10A max
- 4、额定电压 Voltage rating: 300V AC/DC
- 5、温度范围 Temperature range: -25℃ to +85℃
- 6、接触电阻 Contact resistance: $\leq 15\text{m}\Omega$
- 7、绝缘电阻 Insulation resistance: $\geq 1000\text{M}\Omega$
- 8、耐压 Withstand voltage: 1500V AC/minute

型号 MODEL	尺寸 DIMENSION				适用线规 Applicable wires	
	A	B	C	D	mm ²	AWG#
HX45000-01PT	3.6	3.2	2.0	2.0	0.9~1.7	28~22
HX45000-21PT	4.6	4.05	2.8	2.5	1.5~3.0	24~18

未注公差表 UNTOLERANCE TABLE		设计 DRAWN BY		王鹏程		产品名称 PRODUCT NAME		端子 TERMINAL	
≤3	± 0.1	审核 CHECKED BY		郑建银		产品型号 PRODUCT MODEL		CL014/OTP-*PT	
≤10	± 0.2	批准 APPROVED BY		沈才义		勝特力電材超市-龍山店 886-3-5773766 勝特力電材超市-光復店 886-3-5729570 勝特力电子(上海) 86-21-34970699 勝特力电子(深圳) 86-755-83298787			
≤20	± 0.3	日期 DATE		2024.09.28					
≤35	± 0.4	视图 VIEW		单位 UNIT	页码 SHEET				
≤50	± 0.5			mm	1/1				
≤75	± 0.6								
≤100	± 0.8								
ANGLE	± 5°								