
FORK TONGUE TERMINAL

With insulation grip

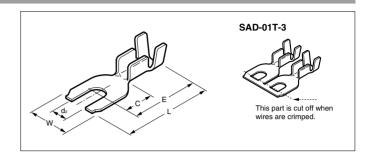


		Applicable wire				Dimensions(mm)										
Model No.	Standard	mm²	AWG #	Insulation O.D. (mm)	Material	Finish	d ₂ (dia.)	E	L	С	w	Material thickness	Q'ty / reel			
SAA-51-3							_									
SAA-51T-3				2.6 to 3.8	Brass	Tin-plated	3.2	3.7		5.8						
SAA-51-3.7						_	0.7		16.8		7.2	0.5	7,500			
SAA-51T-3.7	UL STED	0.5 to 2.0	20 to 14			Tin-plated	3.7									
SAA-51-4	LISTED UP	0.5 to 2.0		2.6 10 3.6		_	4.3									
SAA-51T-4									Tin-plated	4.3					0.0	
SAB-51-5										_					0.0	
SAB-51T-5						Tin-plated	5.3				8.2		5,000			
*SAD-01T-3	(INTERN S).	0.2 to 0.5	24 to 20	Approx 2.0		Tin-plated	3.2	11.0	14.7	5.2	6.3		5,000			

RoHS compliance SAD-01T-3 displays (SN) on a label.

Note: The terminal denoted by * is a twin lead fork terminal and is used for crimping 2 piece terminals simultaneously onto 2 parallel wires like the TV feeder wires.

Without insulation grip

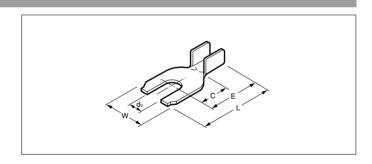


		Applicable wire				Dimensions(mm)						
Model No.	Standard	mm²	AWG #	Material	Finish	d ₂ (dia.)	E	L	С	w	Material thickness	Q´ty / reel
SAA-50-3					_		-				0.5	10,000
SAA-50T-3					Tin-plated	3.2						
SAA-50-3.7	U) (S)	0.5 to 2.0	20 to 14	Brass	_			40.0				
SAA-50T-3.7	(h) (f)·	0.5 to 2.0 20 to 14 Brass	Diass	Tin-plated	3.7	10.0	13.8	6.0	7.2	0.5	10,000	
SAA-50-4			_									
SAA-50T-4					Tin-plated	4.3	'					l

RoHS compliance

FORK TONGUE TERMINAL

Locking type (With insulation grip)

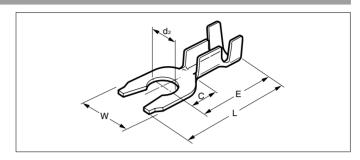

Listed E42024

€ Certified LR20812

LISTED													
		Applicable wire					Dimensions(mm)						
Model No.	Standard	mm²	AWG #	Insulation O.D. (mm)	Material	Finish	d ₂ (dia.)	E	L	С	w	Material thickness	Q'ty / reel
SAA-21-3L				1.5 to 2.8	Brass	_		13.0 10	16.8	5.8	7.2	0.5	7,500
SAA-21T-3L						Tin-plated	3.2						
SAA-21-3.5L	USTED SP.	0.3 to 0.75	0.75 22 to 18			_							
SAA-21T-3.5L		0.3 10 0.75				Tin-plated	3.7		10.0	3.0			
SAA-21-4L			_										
SAA-21T-4L						Tin-plated	4.3						

RoHS compliance

Crimping machine, Applicator

	Crimping	Applicator						
Contact		Crimp applicator	Dies	Crimp applicator with dies				
SAA-21(T)-**		MK-L	MK/SAA-21	APLMK SAA21				
3AA-21(1)-		_	-	_				
SAA-50(T)-**	AP-K2N	MK-L	MK/SAA-50	APLMK SAA50				
3AA-30(1)-		-	-	-				
SAA-51(T)-**		MK-L MK/SA		APLMK SAA51				
3AA-31(1)-		-	-	-				

	0-11	Applicator						
Contact	Crimping machine	Crimp applicator	Dies	Crimp applicator with dies				
SAB-51(T)-**		MK-L	MK/SAB-51	APLMK SAB51				
3AD-31(1)-	AP-K2N	-	-	-				
SAD-01(T)-**	AP-NZIN	MK-L	MK/SAD-01	APLMK SAD01				
3AD-01(1)-		-	-	-				

- * Compliant with RoHS.
- * Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- * Contact JST for details.