

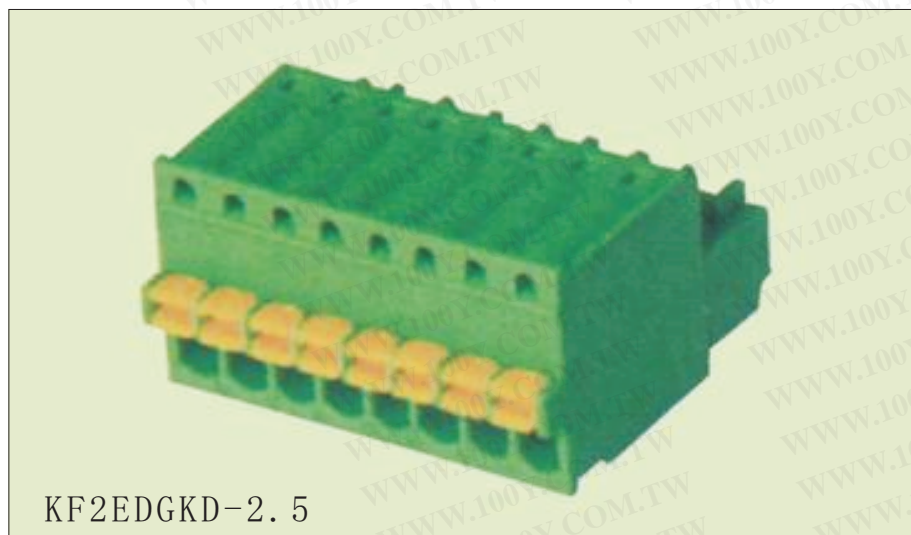


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



产品规格书

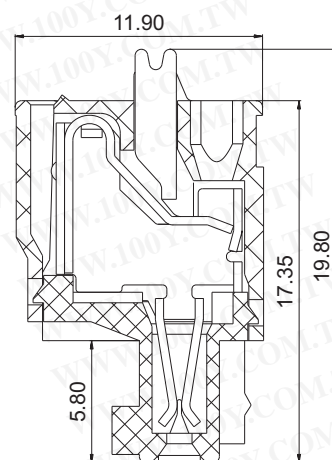

额定电压	125V
额定电流	4A
使用线径	28-20 AWG
耐电压	AC1250V/1Min
机械性能	
温度范围	-40℃—+105℃
剥线长度	8.0-9.0mm
尺寸	
间距	2.5mm
极数	2P-24P
材质及电镀	
塑体	PA66 UL94V-0
弹片	不锈钢
夹子	磷铜 镀镍

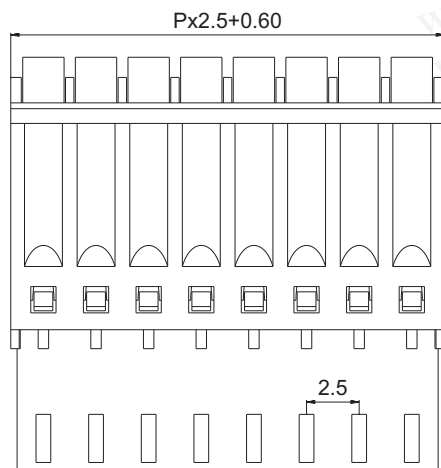

订购方式:

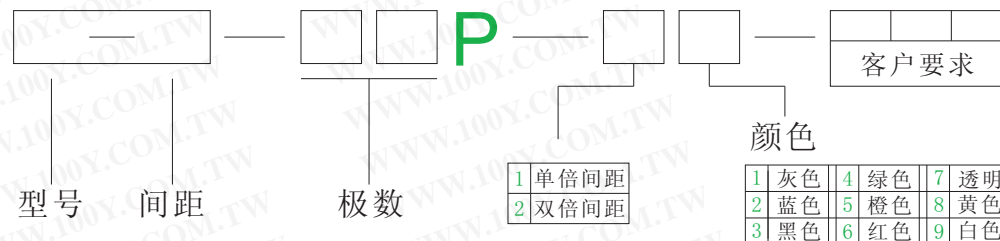

○

NAME KF2EDGKD-2.5