



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

产品规格书


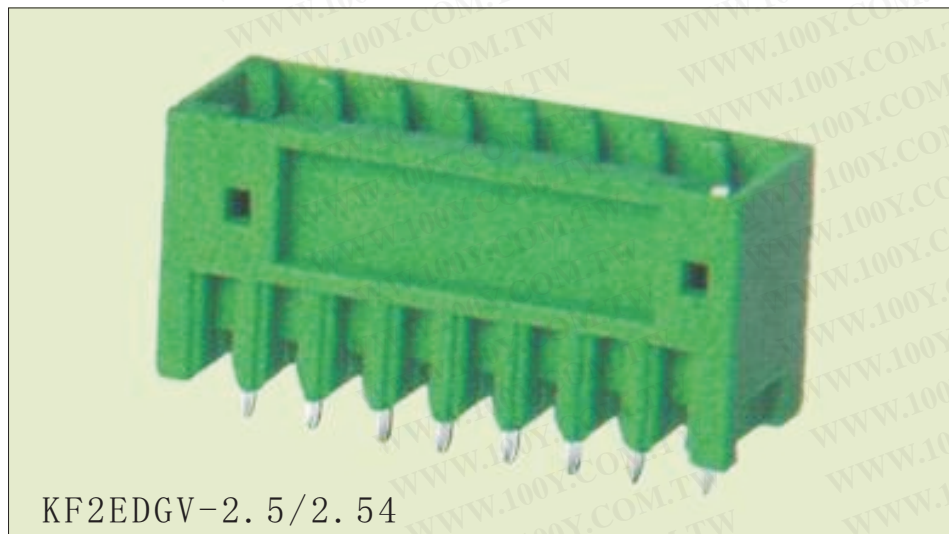


KF2EDGV-2.5/2.54

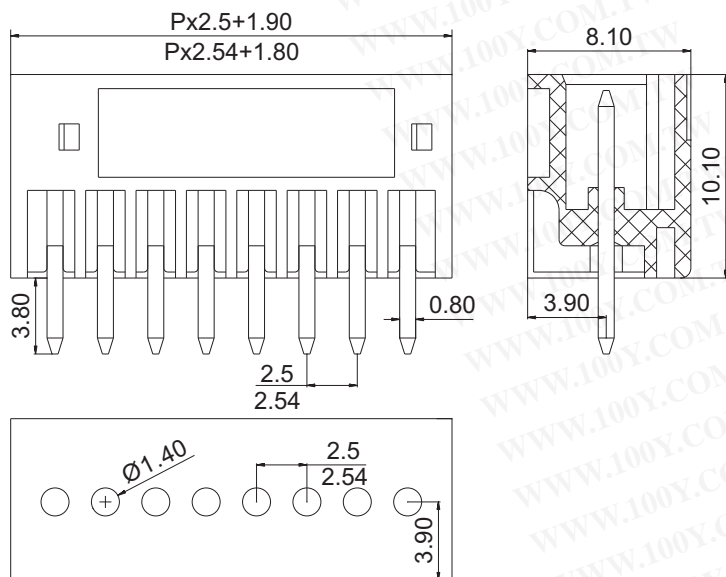

额定电压	125V
额定电流	4A
耐电压	AC1250V/1Min
机械性能	
温度范围	-40°C — +105°C
尺寸	
间距	2.5/2.54mm
极数	2P-24P
材质及电镀	
塑体	PA66 UL94V-0
焊针	黄铜 镀锡

订购方式:

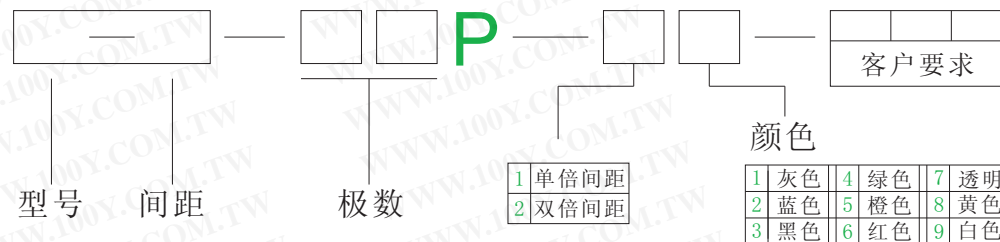

NAME KF2EDGV-2.5/2.54