
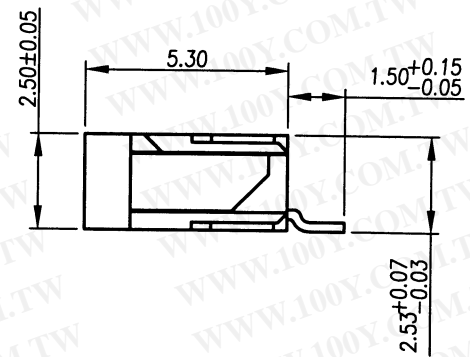
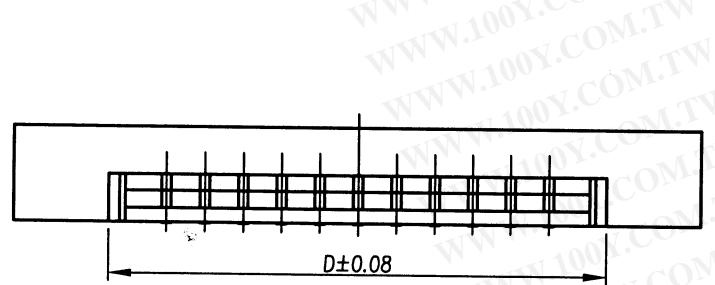


REV	MODIFICATION	DATE	DRAW
B	EN-03-0413	92.04.18	SEVEN
C	EN-04-0703	93.07.02	JOAN
D	EN-04-0922	93.09.22	JOAN

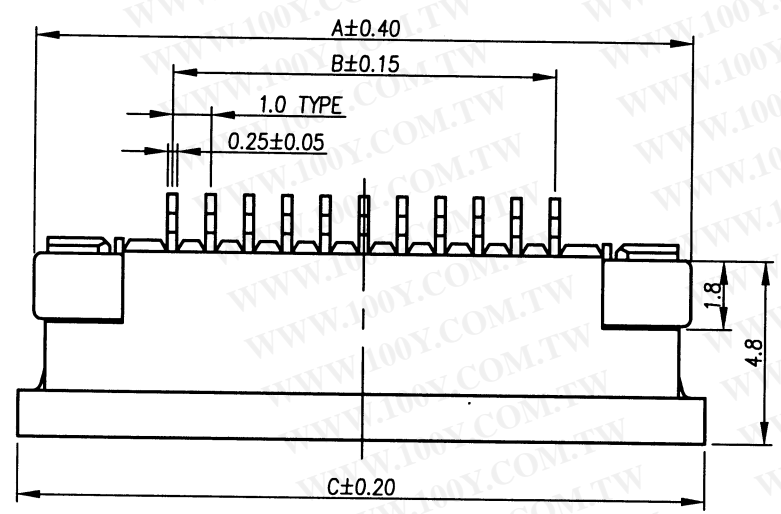


SPECIFICATION:
 OPERATING VOLTAGE: 100 VC/DC MAX.
 CURRENT RATING: 0.5 AMP MAX.
 CONTACT RESISTANCE: 30MΩ MAX
 INSULATION RESISTANCE: 500MΩ MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
 DURABILITY: 50MΩ MAX. AFTER 20 INSERTIONS AND WITHDRAWS
 OPERATING TEMPERATURE: -40°C TO +85°C
 ACCOMMODATED FFC/FPC THICKNESS: 0.25~0.35mm

MATERIAL:
 BODY: GLASS REINFORCED PPS UL94V-0 RATED
 SLIDER: GLASS REINFORCED PPS UL94V-0 RATED
 COLOR: BODY-BROWN,SLIDER-BLACK
 CONTACT: PHOSPHOR BRONZE;TIN ALLOY PLATED
 MOUNTING PLATE: PHOSPHOR BRONZE,TIN ALLOY PLATED

PART NO. : FPCTJ-B XX T X W X 32
 NO. OF CONTACT (04~34) 0:TUBE PACKING 1:TAPE & REEL PACKING
 1:TIN/LEAD T:LEAD/FREE

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIMENSION IN mm [Inch]		PROD. SPEC.	C KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE 1.00 ZIF FPC CONN. SIDE ENTRY CUSTOMER DRAWING	
.X±0.35	X.±	APPROVE	FILE NO.	DWG NO. FPCTJ-BXTXWX32
.XX±0.20	.X.±	CHECK	SIZE A4	PROJ. SHEET 1 / 2
.XXX±0.10	.XX.±	DRAW	SCALE 5:1	REV D

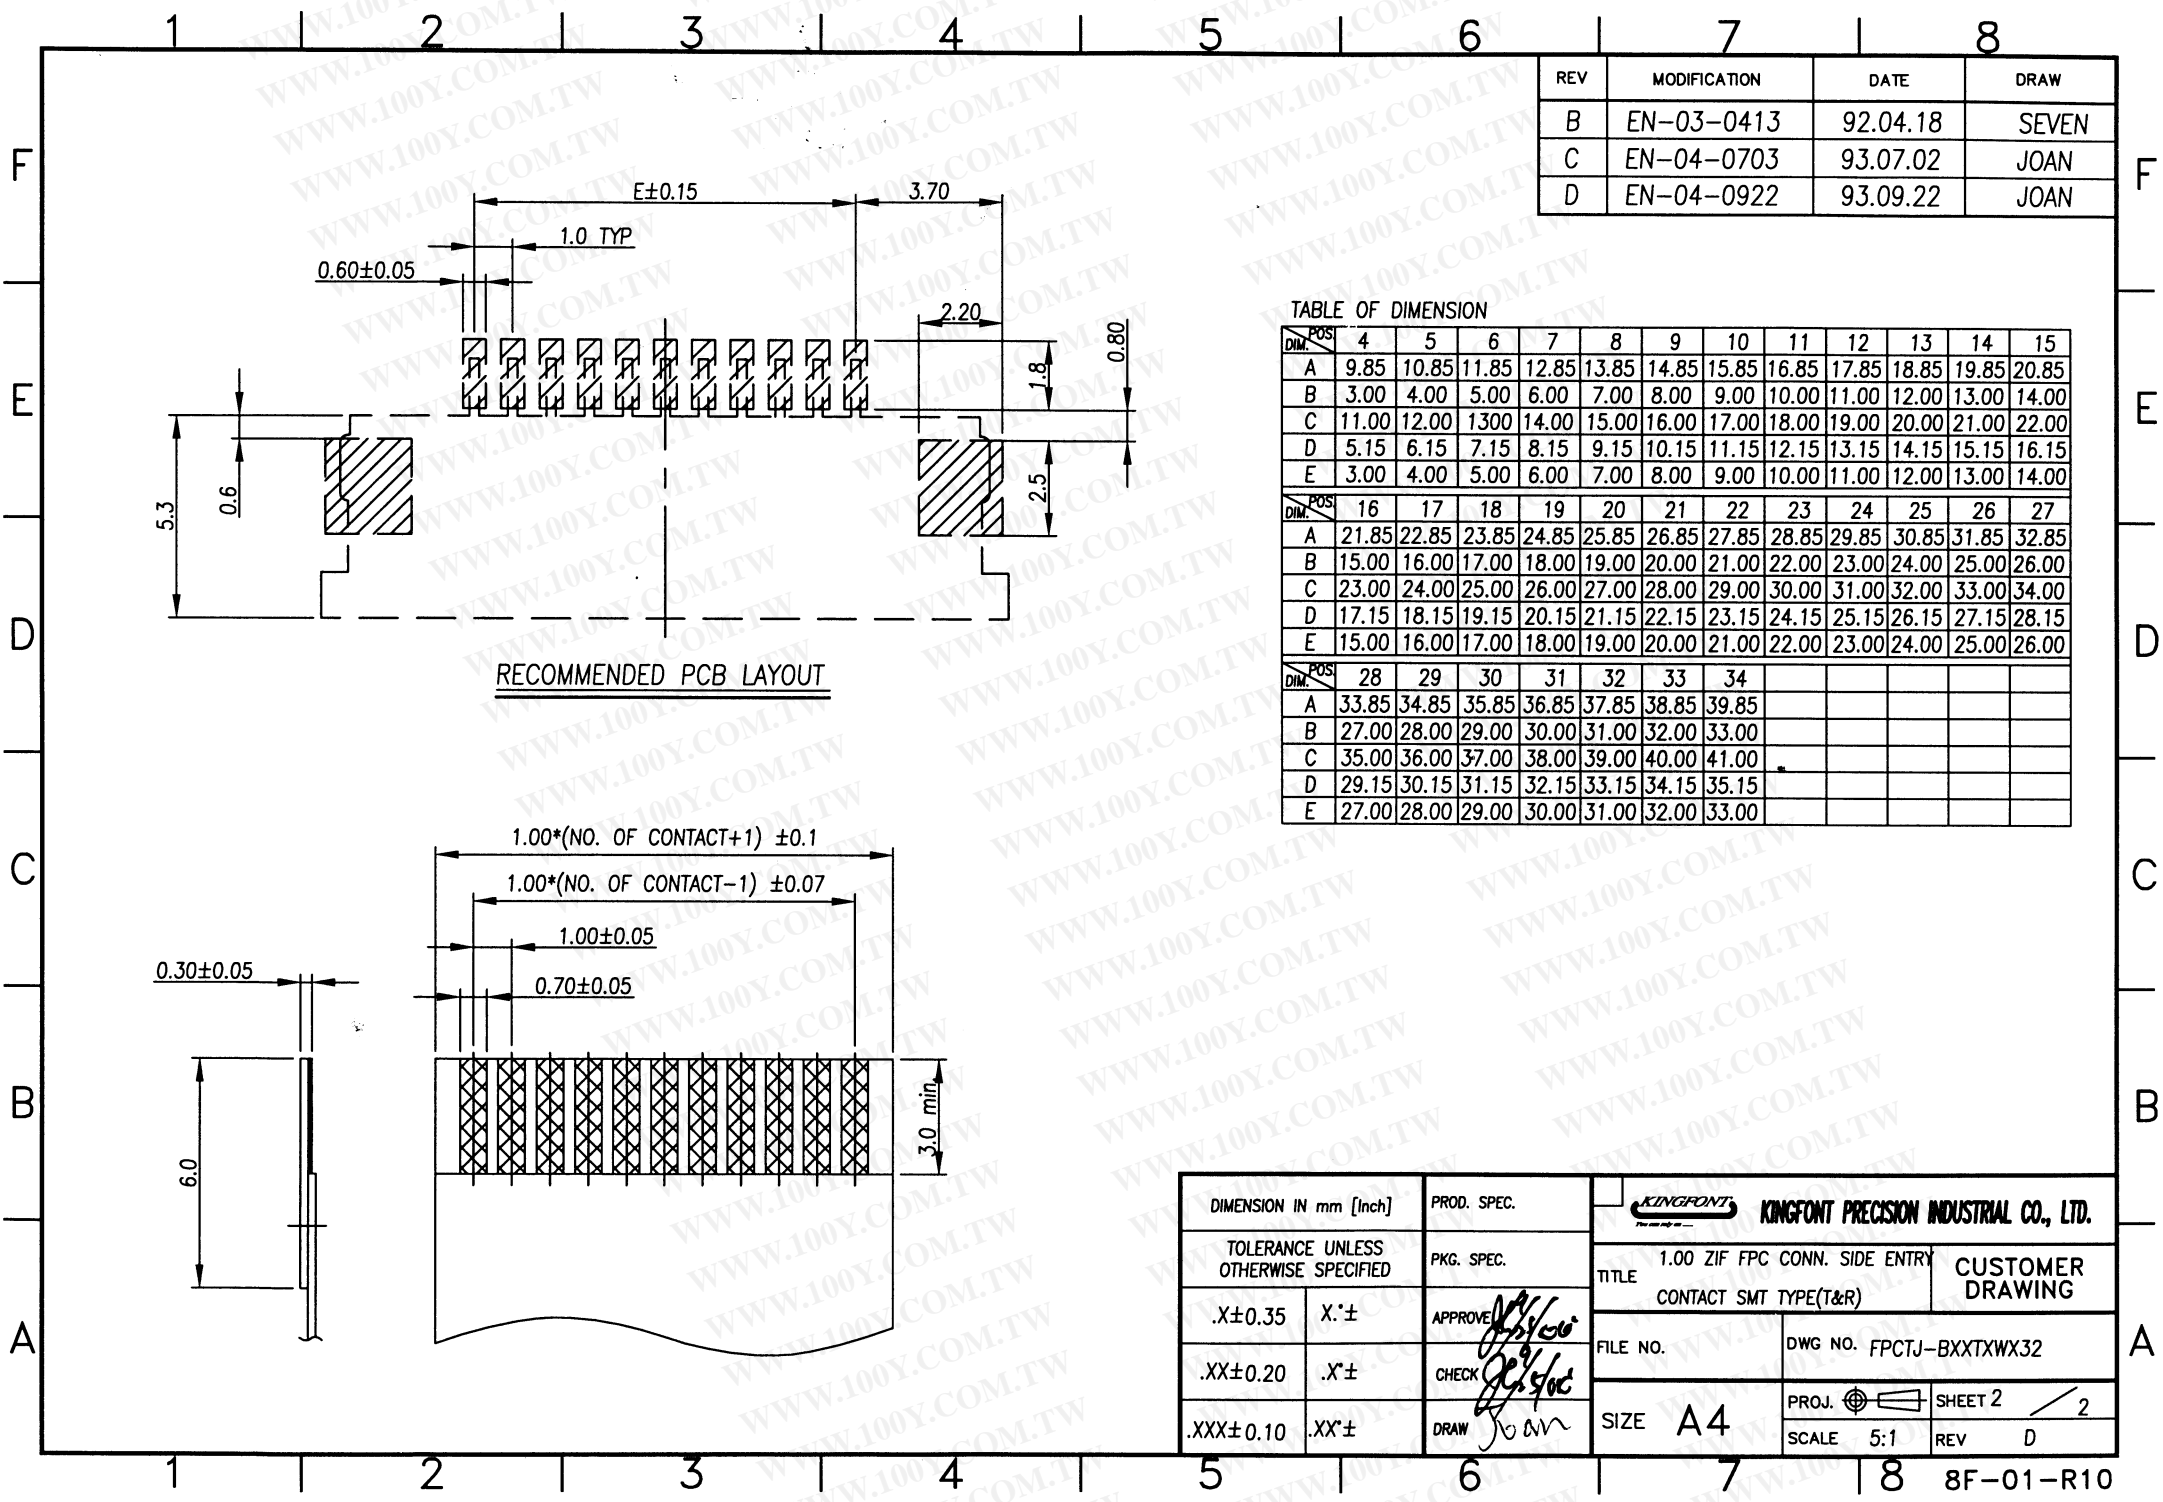

REV	MODIFICATION	DATE	DRAW
B	EN-03-0413	92.04.18	SEVEN
C	EN-04-0703	93.07.02	JOAN
D	EN-04-0922	93.09.22	JOAN

TABLE OF DIMENSION

DIM\POS	4	5	6	7	8	9	10	11	12	13	14	15
A	9.85	10.85	11.85	12.85	13.85	14.85	15.85	16.85	17.85	18.85	19.85	20.85
B	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00
C	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00
D	5.15	6.15	7.15	8.15	9.15	10.15	11.15	12.15	13.15	14.15	15.15	16.15
E	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00

DIM\POS	16	17	18	19	20	21	22	23	24	25	26	27
A	21.85	22.85	23.85	24.85	25.85	26.85	27.85	28.85	29.85	30.85	31.85	32.85
B	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00
C	23.00	24.00	25.00	26.00	27.00	28.00	29.00	30.00	31.00	32.00	33.00	34.00
D	17.15	18.15	19.15	20.15	21.15	22.15	23.15	24.15	25.15	26.15	27.15	28.15
E	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00

DIM\POS	28	29	30	31	32	33	34				
A	33.85	34.85	35.85	36.85	37.85	38.85	39.85				
B	27.00	28.00	29.00	30.00	31.00	32.00	33.00				
C	35.00	36.00	37.00	38.00	39.00	40.00	41.00				
D	29.15	30.15	31.15	32.15	33.15	34.15	35.15				
E	27.00	28.00	29.00	30.00	31.00	32.00	33.00				

RECOMMENDED PCB LAYOUT

DIMENSION IN mm [Inch]	PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	TITLE 1.00 ZIF FPC CONN. SIDE ENTRY CONTACT SMT TYPE(T&R) CUSTOMER DRAWING	
.X±0.35 X'±	APPROVE <i>[Signature]</i>	FILE NO.	DWG NO. FPCTJ-BXXTXWX32
.XX±0.20 X"±	CHECK <i>[Signature]</i>	SIZE A4	PROJ. SHEET 2 / 2
.XXX±0.10 XX"±	DRAW <i>[Signature]</i>	SCALE 5:1	REV D