

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


REV	MODIFICATION	DATE	DRAW
B	EN-03-0413	92.04.18	SEVEN
C	EN-04-0703	93.07.10	JOAN
D	EN-05-0626	94.06.15	JOAN

SPECIFICATION:
 OPERATING VOLTAGE: 100 VC/DC MAX.
 CURRENT RATING: 0.5 AMP MAX.
 CONTACT RESISTANCE: 30M MAX
 INSULATION RESISTANCE: 500M MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
 DURABILITY: 50M MAX. AFTER 20 INSERTIONS AND WITHDRAWS
 OPERATING TEMPERATURE: -40°C TO +85°C
 ACCOMMODATED FFC/FPC THICKNESS: 0.25~0.35mm

MATERIAL:
 BODY: GLASS REINFORCED PPS UL94V-0
 RATED
 SLIDER: GLASS REINFORCED PPS UL94V-0
 RATED
 COLOR: BODY-WHITE,SLIDER-BLACK
 CONTACT: PHOSPHOR BRONZE,TIN ALLOY PLATED
 MOUNTING PLATE: PHOSPHOR BRONZE,TIN ALLOY PLATED

PART NO. : FPCTJ-T XX T X W X 32
 NO. OF CONTACT (04~34)
 1:TIN/LEAD
 T:LEAD/FREE
 0:TUBE PACKING
 1:TAPE & REEL PACKING

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.		
.X±0.35	X.*±	APPROVE	TITLE 1.00 ZIF FPC CONN. SIDE ENTRY UPPER CONTACT SMT TYPE(T&R) CUSTOMER DRAWING	
.XX±0.20	.X*±	CHECK	FILE NO.	DWG NO. FPCTJ-TXXTXWX32
.XXX±0.10	.XX*±	DRAW	SIZE A4	PROJ. SHEET 1 / 2
			SCALE 5:1	REV D

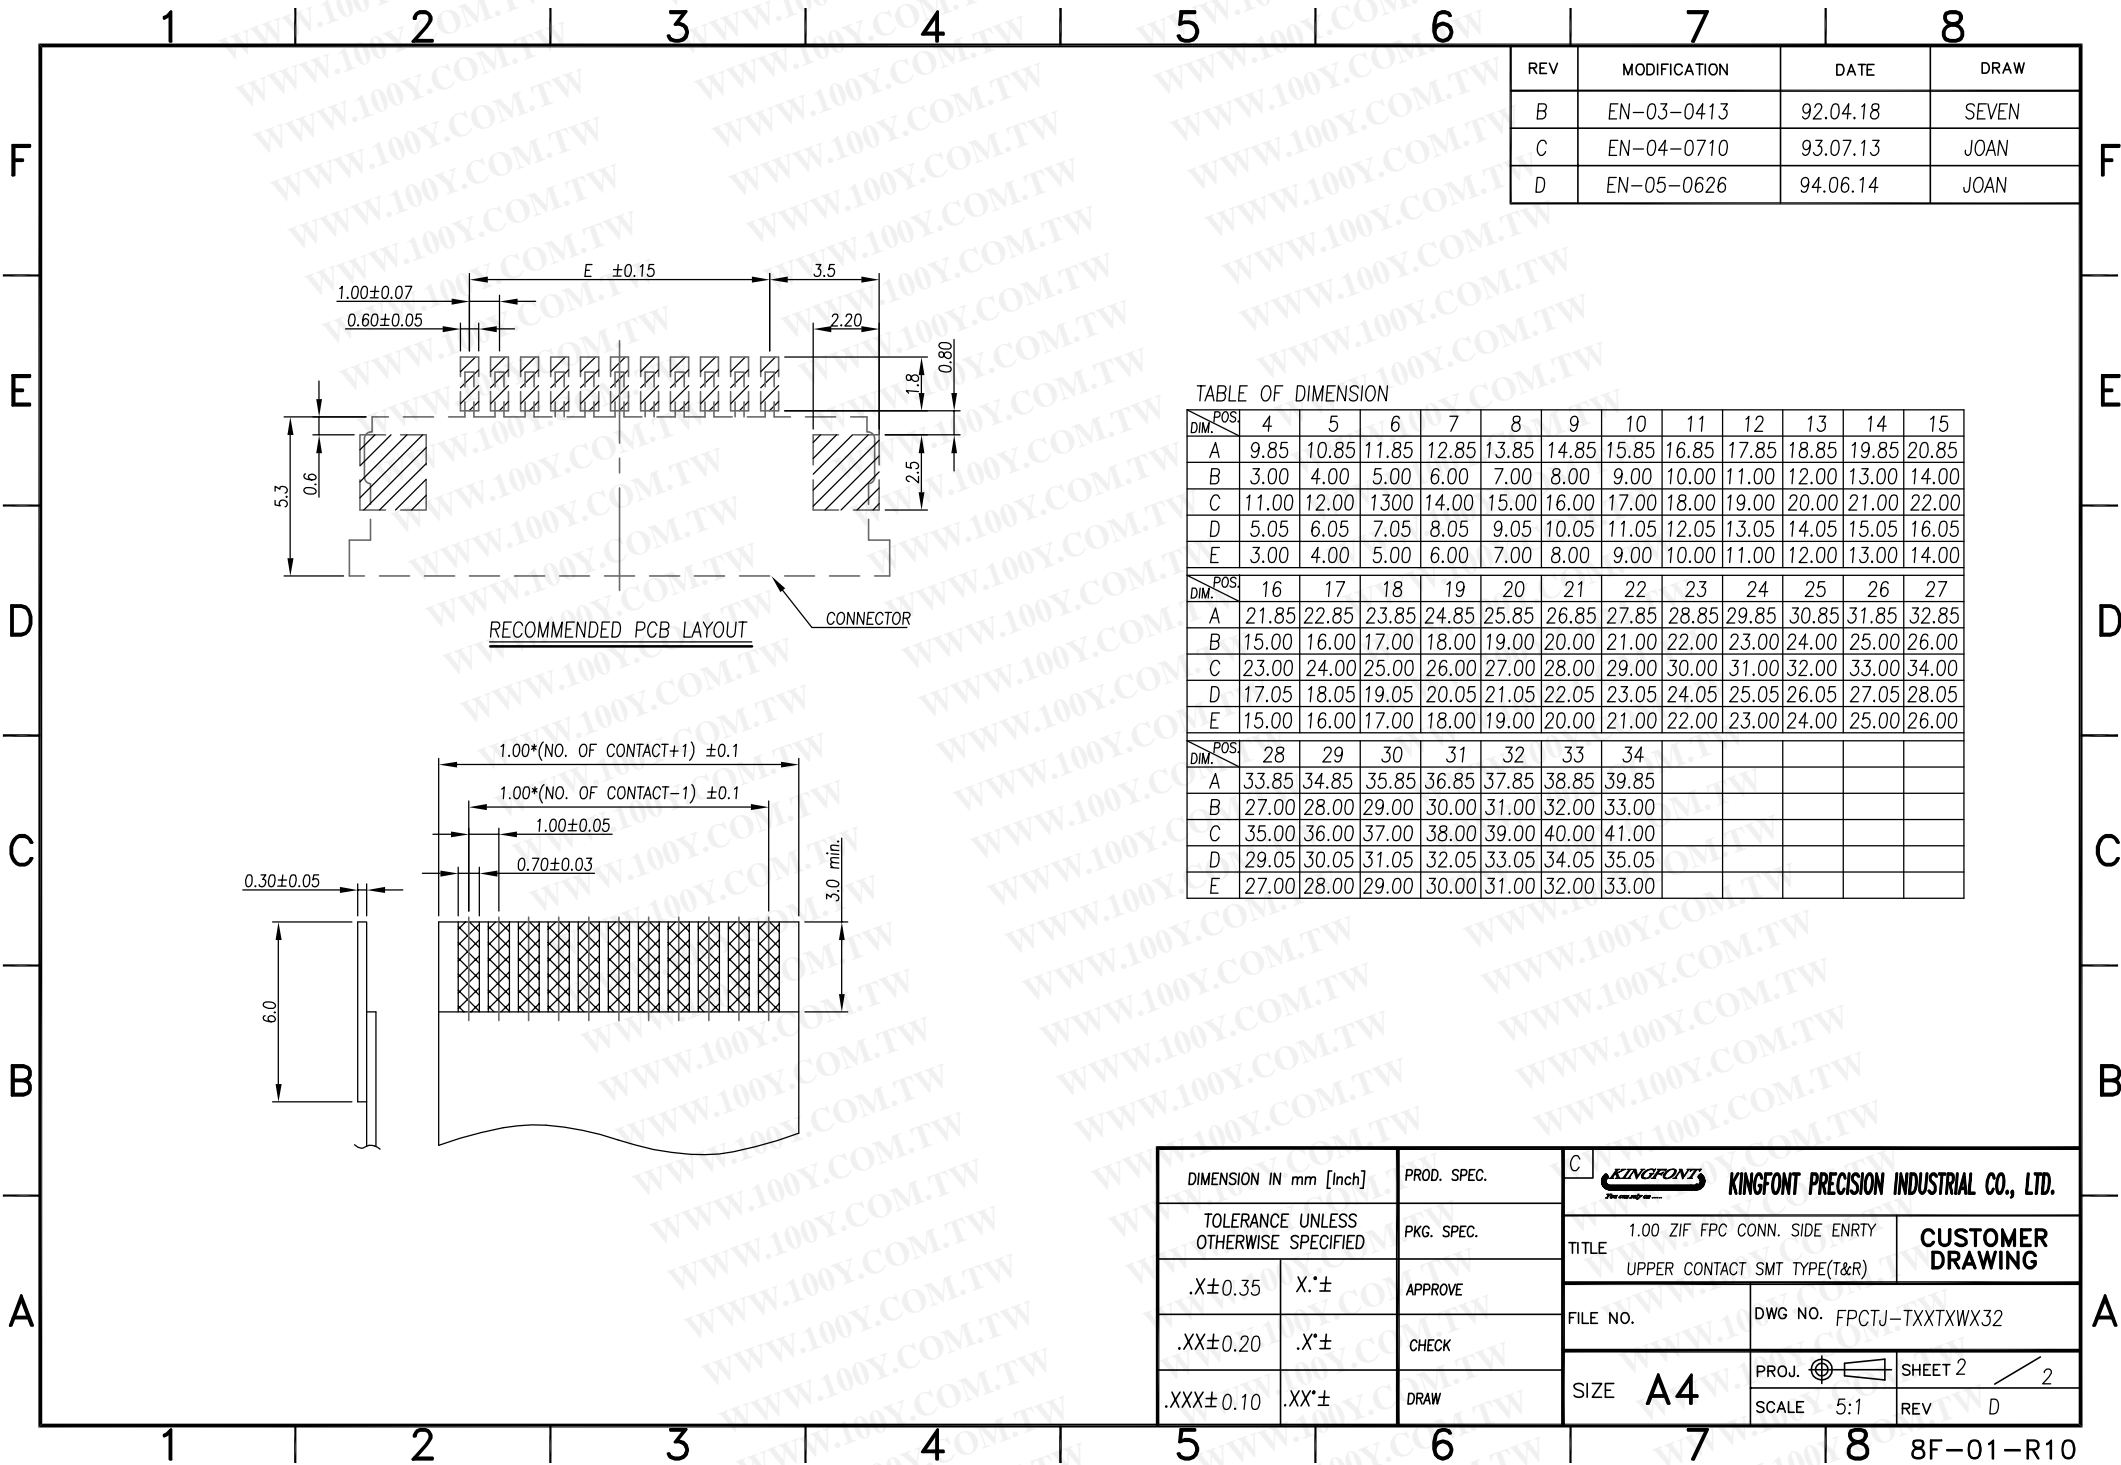

REV	MODIFICATION	DATE	DRAW
B	EN-03-0413	92.04.18	SEVEN
C	EN-04-0710	93.07.13	JOAN
D	EN-05-0626	94.06.14	JOAN

TABLE OF DIMENSION

DIM. POS	4	5	6	7	8	9	10	11	12	13	14	15
A	9.85	10.85	11.85	12.85	13.85	14.85	15.85	16.85	17.85	18.85	19.85	20.85
B	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00
C	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00
D	5.05	6.05	7.05	8.05	9.05	10.05	11.05	12.05	13.05	14.05	15.05	16.05
E	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00

DIM. POS	16	17	18	19	20	21	22	23	24	25	26	27
A	21.85	22.85	23.85	24.85	25.85	26.85	27.85	28.85	29.85	30.85	31.85	32.85
B	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00
C	23.00	24.00	25.00	26.00	27.00	28.00	29.00	30.00	31.00	32.00	33.00	34.00
D	17.05	18.05	19.05	20.05	21.05	22.05	23.05	24.05	25.05	26.05	27.05	28.05
E	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00

DIM. POS	28	29	30	31	32	33	34
A	33.85	34.85	35.85	36.85	37.85	38.85	39.85
B	27.00	28.00	29.00	30.00	31.00	32.00	33.00
C	35.00	36.00	37.00	38.00	39.00	40.00	41.00
D	29.05	30.05	31.05	32.05	33.05	34.05	35.05
E	27.00	28.00	29.00	30.00	31.00	32.00	33.00

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE 1.00 ZIF FPC CONN. SIDE ENTRY	
.X±0.35	X.*±	APPROVE	CUSTOMER DRAWING	
.XX±0.20	.X.*±	CHECK	FILE NO.	DWG NO. FPCTJ-TXXTXWX32
.XXX±0.10	.XX.*±	DRAW	SIZE A4	PROJ. SHEET 2 / 2
			SCALE 5:1	REV D