




10 9 8 7 6 5 4 3 2 1

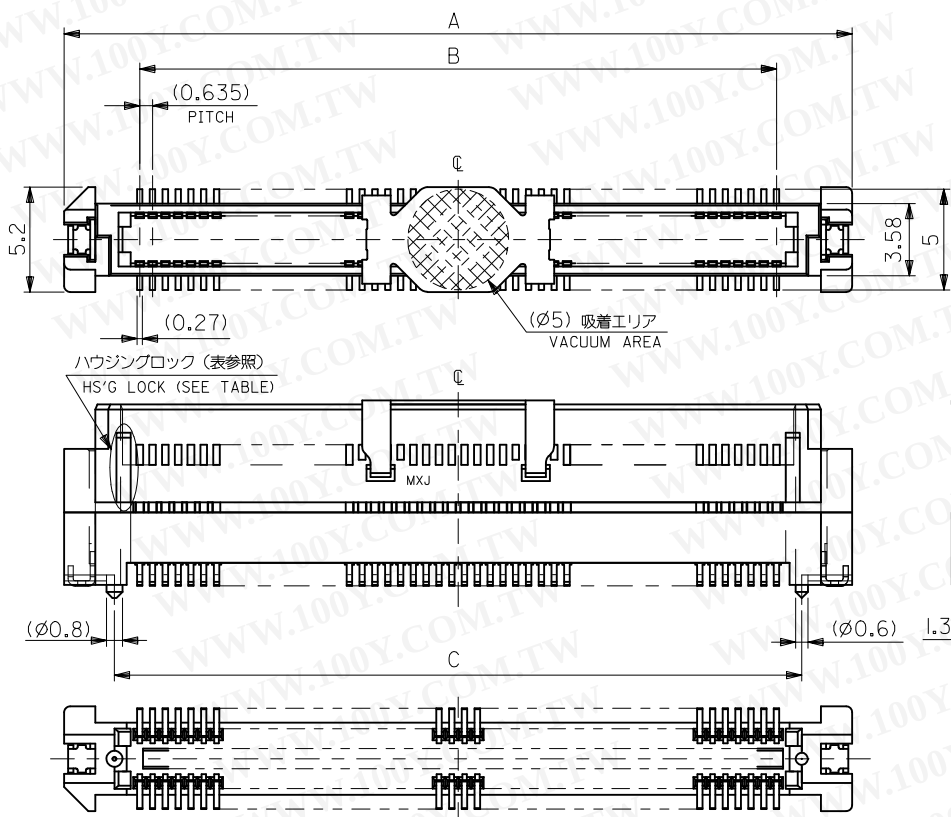

NOTES

1. 材質
MATERIAL
ハウジング: ガラス入りPPS、茶色、UL94V-0
HOUSING: POLYPHENYLENE SULFIDE, GLASS FILLED, BROWN, UL94V-0
ターミナル: 銅合金 (t=0.2)、ニッケルメッキ下地1.5マイクロナメートル以上
TERMINAL: COPPER ALLOY, UNDER-PLATING: NICKEL 1.5 MICROMETER MIN.
接点部: 金メッキ 0.25マイクロナメートル以上
CONTACT AREA: GOLD 0.25 MICROMETER MIN.
半田付け部: 銅メッキ1.0マイクロナメートル以上
SOLDER TAIL AREA: TIN 1.0 MICROMETER MIN.
ネール: リン青銅 (t=0.2)、ニッケルメッキ下地1.0マイクロナメートル以上
NAIL: PHOSPHOR BRONZE, UNDER-PLATING: NICKEL 1.0 MICROMETER MIN.
鍍メッキ1.0マイクロナメートル以上
TIN 1.0 MICROMETER MIN.
吸着カバー: ステンレス (t=0.2)
VACUUM COVER: STAINLESS STEEL

2. テールのバラツキ寸法
TAIL COPLANARITY
テール平坦度は、0.1ミリ以下とする。
TAILS COPLANARITY TO BE 0.1 MILLIMETER MAX.

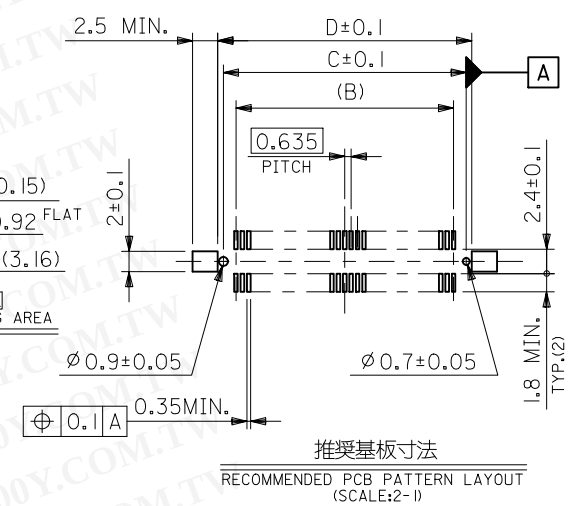

無し NO	66.47	65.37	62.865	70.37	53627-2074	—	200
	53.77	52.67	50.165	57.67	—	53627-1675	160
	47.42	46.32	43.815	51.32	53627-1474	—1475	140
	41.07	39.97	37.465	44.97	—1274	—1275	120
	34.72	33.62	31.115	38.62	—1074	—1075	100
有り YES	31.55	30.45	27.94	35.45	—0974	—0975	90
	28.37	27.27	24.765	32.27	—0874	—0875	80
	25.2	24.1	21.59	29.1	—0774	—0775	70
	22.02	20.92	18.415	25.92	—0674	—0675	60
	18.85	17.75	15.24	22.75	—0574	—0575	50
ハウジングロック HS'G LOCK	15.67	14.57	12.065	19.57	—0474	—0475	40
	12.5	11.4	8.89	16.4	—0374	—0375	30
	9.32	8.22	5.715	13.22	53627-0274	53627-0275	20
CONNECTOR SERIES No.					53627-**72		
D C B A					エンボス極包 EMBOSSED PACKAGE		
					スティック極包 STICK PACKAGE		
					極数 CIRCUITS		

勝特力材料 86-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw


REVISED EC NO: J2010-2/58 DRWN:TKA/HO CHK'D:M. SASAO APPR:MSASAO	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
				MM ONLY		---	METRIC				
		10 UNDER	± 0.2	DRAWN BY	DATE	TITLE 0.635 PITCH B/B CONN. PLUG HSG COVER ASSY -LEAD FREE-					
		10 OVER 30 UNDER	± 0.25	CHECKED BY	DATE						
		30 OVER	± 0.3	APPROVED BY	DATE		MOLEX INCORPORATED				
		ANGULAR ±3 °	M. SASAO	2004/03/05							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.					
		SEE CHART		SD-53627-001		1 OF 1					
		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

NOTES

1. 製品番号 53627-**72 の詳細寸法については SD-53627-001 を参照下さい。
IN THE PACKAGE , PART NO. 53627-**72 DETAILED DIMENSIONS , SEE SD-53627-001.

2. 梱包数量 : 700個/リール
NUMBER OF CONNECTORS : 700 PCS/REEL

3. リードテープ長さ
LEAD TAPE LENGTH

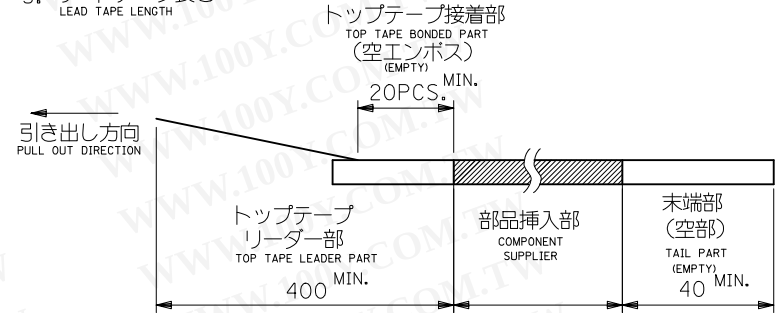


4. トップテープの剥離強度 (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
0.1 ~ 1.3N {10 ~ 130gf}

尚、本規格値は、出荷時に適用。

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

(但し、輸送時に剥離が発生しない事。)

(PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION)

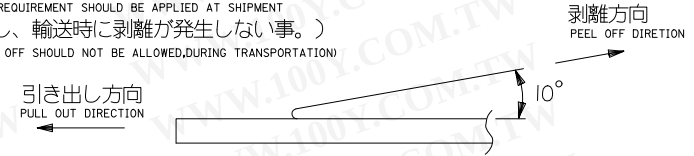

5. 材料

MATERIAL

キャリアテープ : ポリプロピレン (PP)


CARRIER TAPE : POLYPROPYLENE (PP)

トップテープ : PET, PE, PEF

TOP TAPE : PET, PE, PEF

リール

REEL : 紙
CARD BOARD

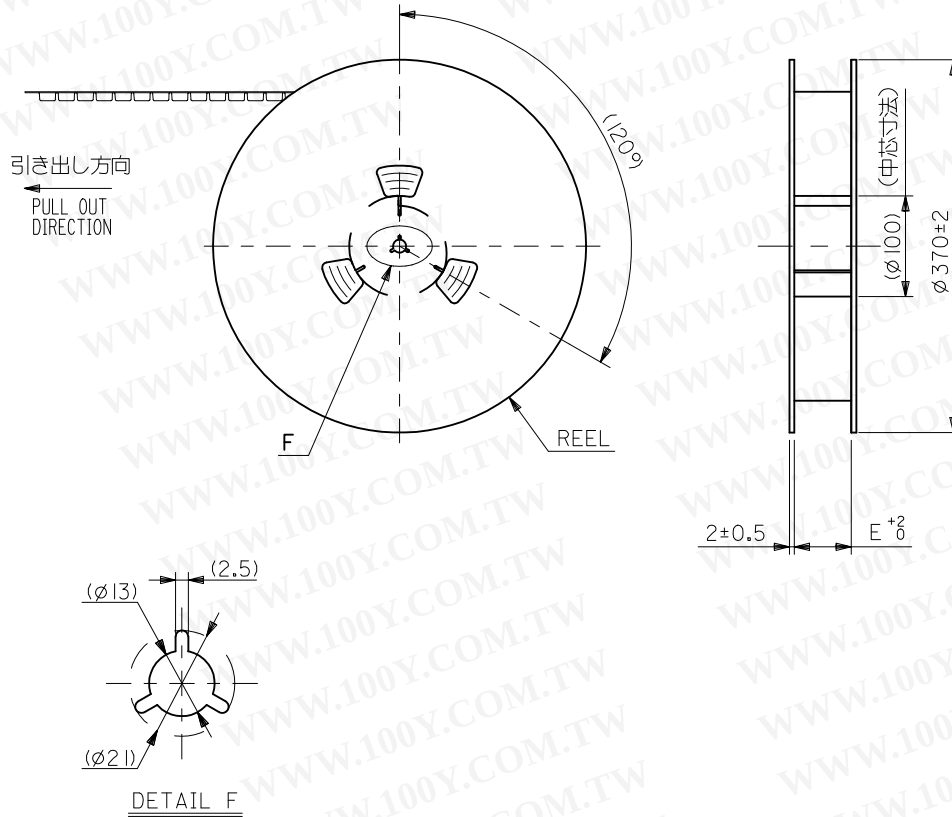

REVISED EC NO.: J2010-2458 DRWN: KAIHO CHKD: M. SASAO APPR: MSASAO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		---	METRIC		
		10 UNDER	± 0.2	DRAWN BY	DATE	TITLE EMBSTP PKG FOR 0.635 B/B PLUG HSG ASSY (H=10) -LEAD FREE-			
		10 OVER 30 UNDER	± 0.25	CHECKED BY	DATE				
		30 OVER	± 0.3	APPROVED BY	DATE				
	ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-53627-002		1 OF 3			
B	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

