

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0099990990**

Status: **Active**

Overview: Mini-SPOX Wire-to-Board Connector System

Description: 2.50mm Pitch, Mini-SPOX PCB Header, Single Row, Vertical, Through Hole, Tin Plating, 6 Circuits, Bag, with Swaged PC Tails

Documents:

[Drawing \(PDF\)](#)

[2D Drawing DXF \(PDF\)](#)

[3D Model](#)


[2D Drawing \(DXF\)](#)

[3D Model \(PDF\)](#)

[Product Specification PS-5264-001-001 \(PDF\)](#)

[Packaging Specification SPK-5267-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

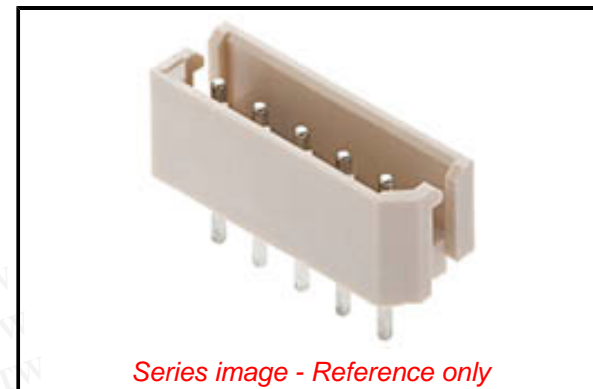

Series image - Reference only

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Headers
Series 5267
Application Signal, Wire-to-Board
Overview Mini-SPOX Wire-to-Board Connector System
Product Name Mini-SPOX
UPC 800753577015

Physical

Breakaway No
Circuits (Loaded) 6
Circuits (maximum) 6
Color - Resin Natural
Durability (mating cycles max) 30
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 532.600/mg
Number of Rows 1
Orientation Vertical
PC Tail Length 3.50mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 2.50mm
Plating min - Mating 4.064µm
Plating min - Termination 4.064µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Fully
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

China RoHS

Search Parts in this Series

5267 Series

Mates With

Mini-SPOX Receptacle Housing 5264

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Electrical

Current - Maximum per Contact
Voltage - Maximum

3.0A
250V

Material Info

Engineering Number

5267-06A-X

Reference - Drawing Numbers

Packaging Specification

SPK-5267-001-001

Product Specification

PS-5264-001-001

Sales Drawing

SD-5267-NA-X

This document was generated on 04/14/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION