




产品编号：[348245126](#)

Product Description：PROPOSED
REPLACEMENT: MINI50 GEN II UNSEALED
RECEPTACLES (206523 SERIES)
 Mini50
Unsealed Receptacle, Dual Row, Bridged,
with CPA, 12 Circuits, Polarization Option
C, Dark Gray

系列号：34824

状态：Active

Product Category：Connector Housings



文件和资源

图纸

[图纸 348245126_sd.pdf](#)

[包装设计图 PK-31301-538-001.pdf](#)

3D 模型和设计文件

[3D模型 348245126_stp.zip](#)

规格

[应用规格 AS-34791-020-CH-001.pdf](#)

[应用规格 AS-34791-020-001.pdf](#)

[应用规格 AS-34791-020-FR-001.pdf](#)

[产品规格 PS-34791-020-001.pdf](#)

[测试摘要 347910020-TS-000.pdf](#)

产物环境合规

合规

GADSL/IMDS	Compliant
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

[多部分产品合规性声明](#)

- Eu RoHS

- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	34824
说明	PROPOSED REPLACEMENT: MINI50 GEN II UNSEALED RECEPTACLES (206523 SERIES) Mini50 Unsealed Receptacle, Dual Row, Bridged, with CPA, 12 Circuits, Polarization Option C, Dark Gray
应用	Automotive, Power, Wire-to-Board
产品系列	Mini50 Connection Systems
产品名称	Mini50
UPC	889056224758

物理

电路数（最多）	12
颜色-树脂	Gray (Dark)
性别	Receptacle
符合灼热丝规范	否
插接极性	是
锁定插接部位	是
材料 - 树脂	PBT
净重	1. 600/g
行数	2
包装形式	Bag

面板安装式	否
间距 - 插配接口	2.00mm
间距 - 终端界面	2.00mm
极化	C
有极性的插配件	是
可堆叠的	否
运行温度范围	-40° to +105° C


可配插/可连接使用的产品

可配插部件


描述	产品编号
Mini50 Unsealed Dual Row Vertical Headers	<u>34825</u>
Mini50 Unsealed Dual Row Right-Angle Headers	<u>34826</u>
Mini50 Unsealed Dual Row Right-Angle Headers	<u>34897</u>

可连接使用部件


描述	产品编号
CTX50 Unsealed Receptacle Terminals	<u>560023</u>

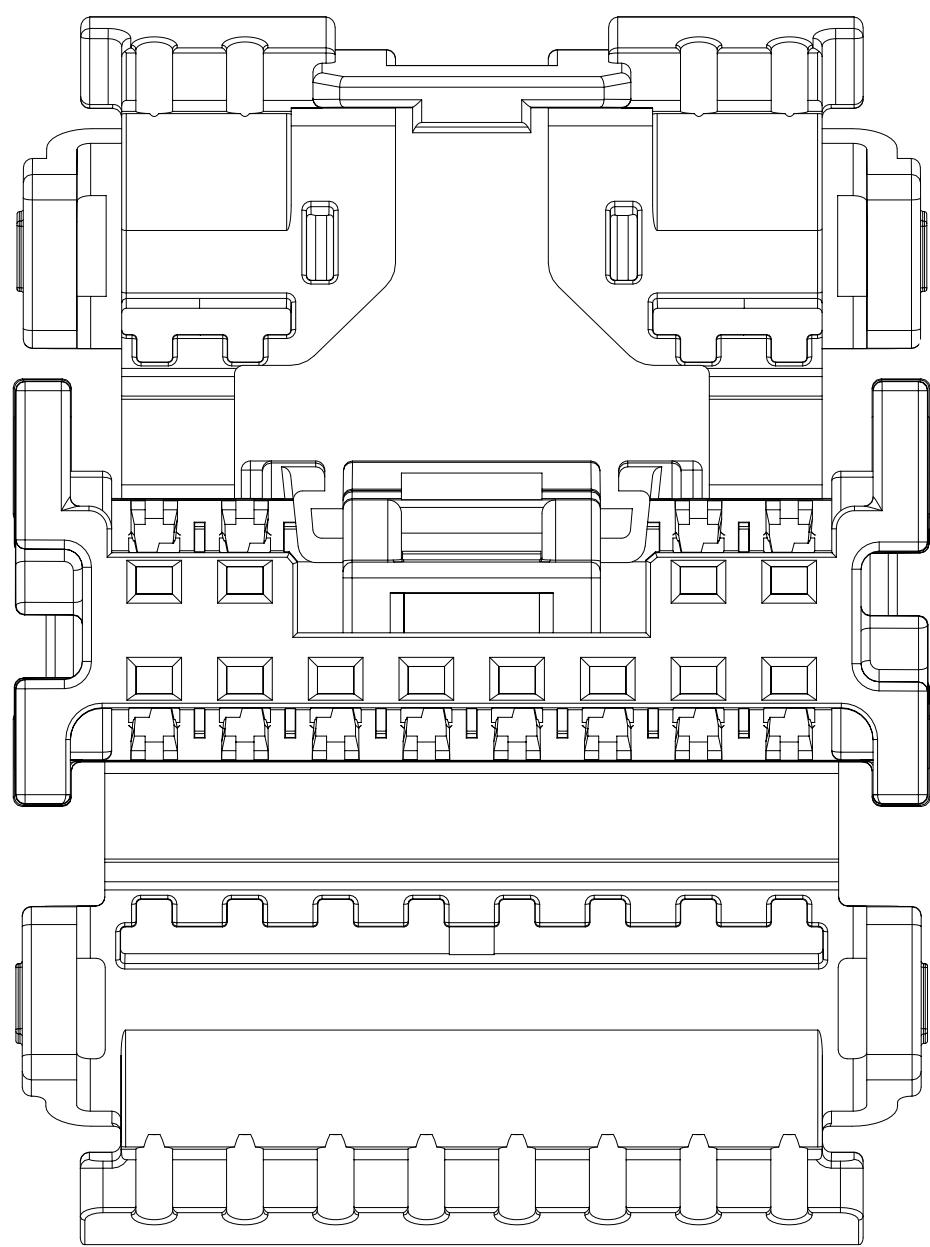


12 CIRCUIT POLARIZATION A

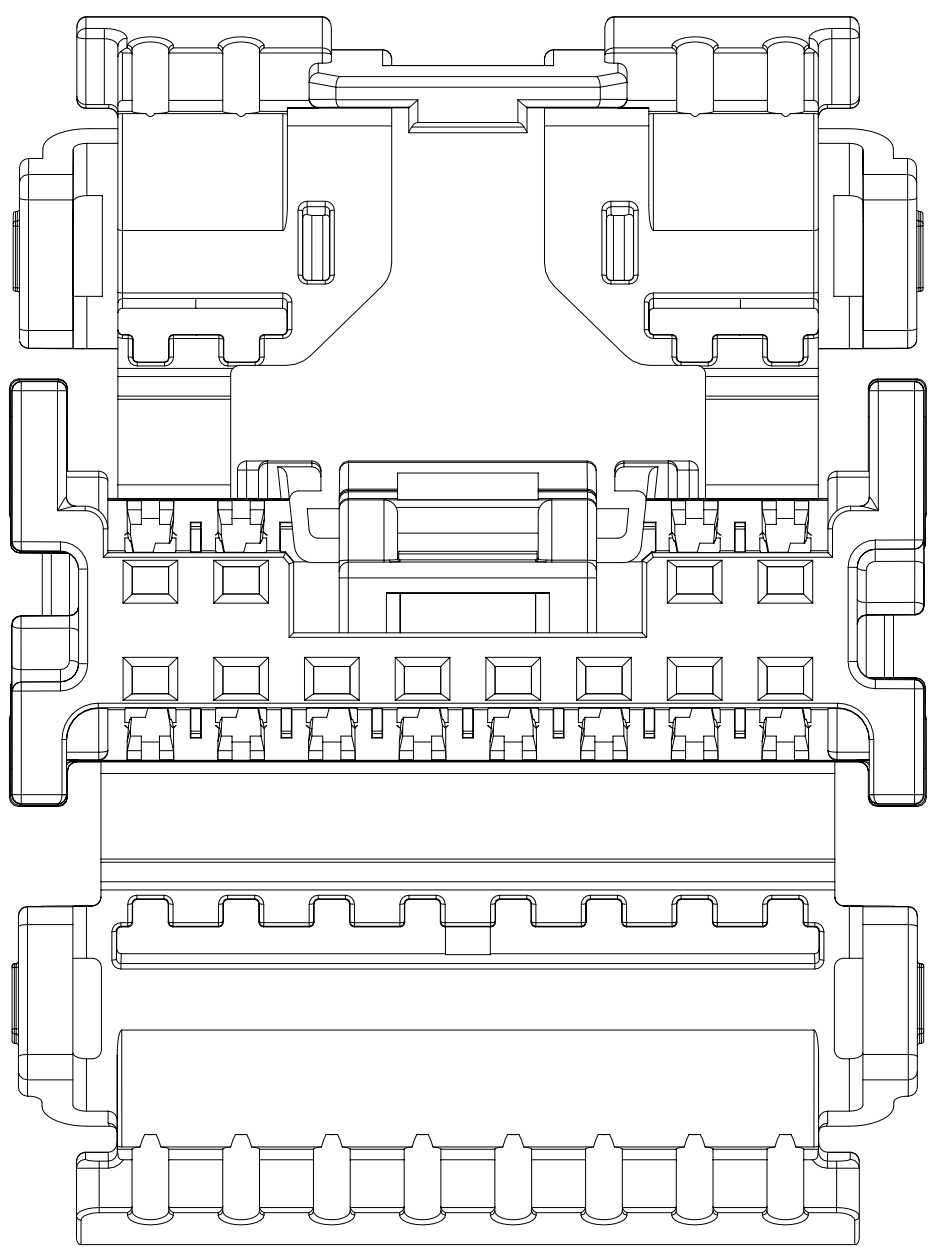


12 CIRCUIT POLARIZATION B

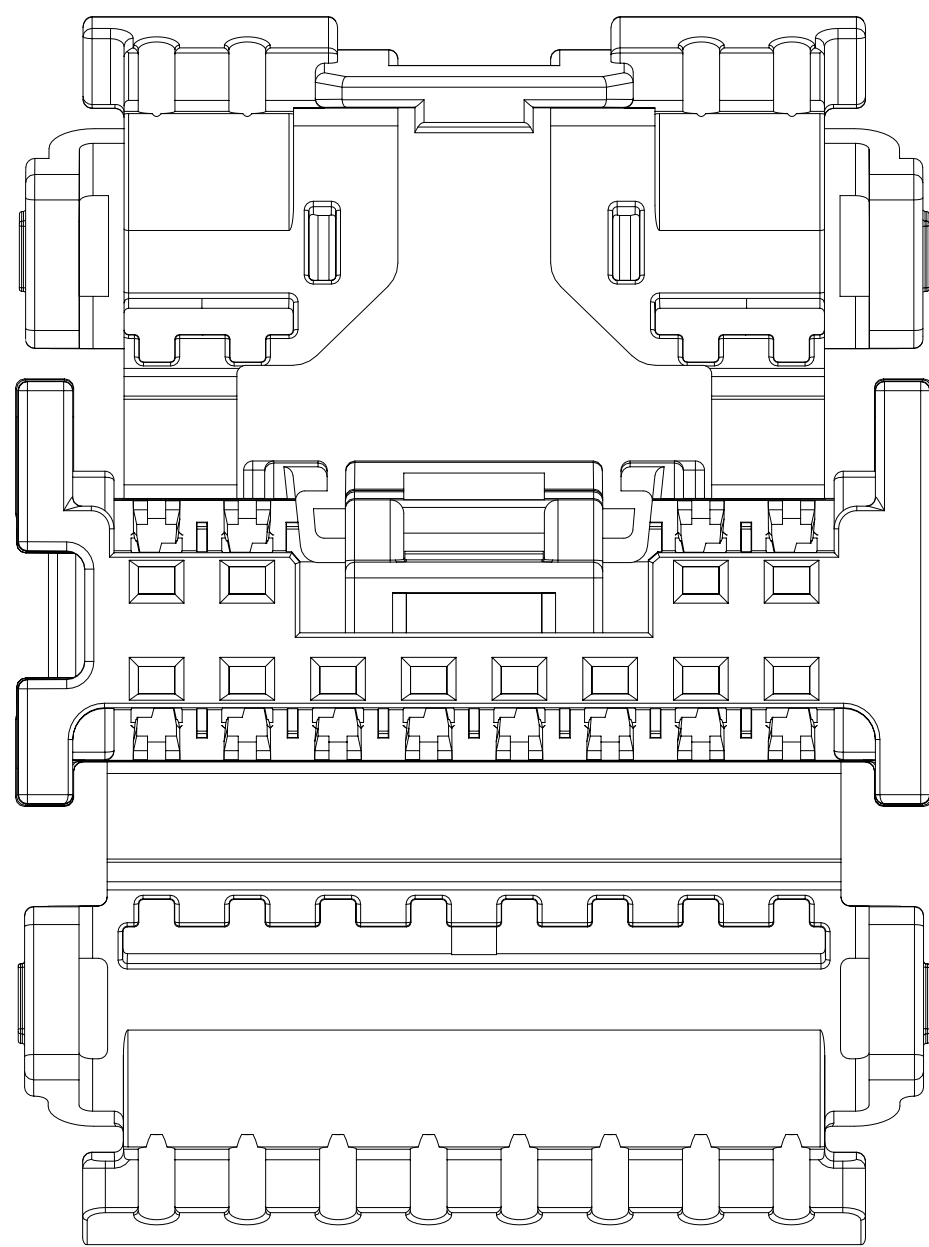


12 CIRCUIT POLARIZATION C

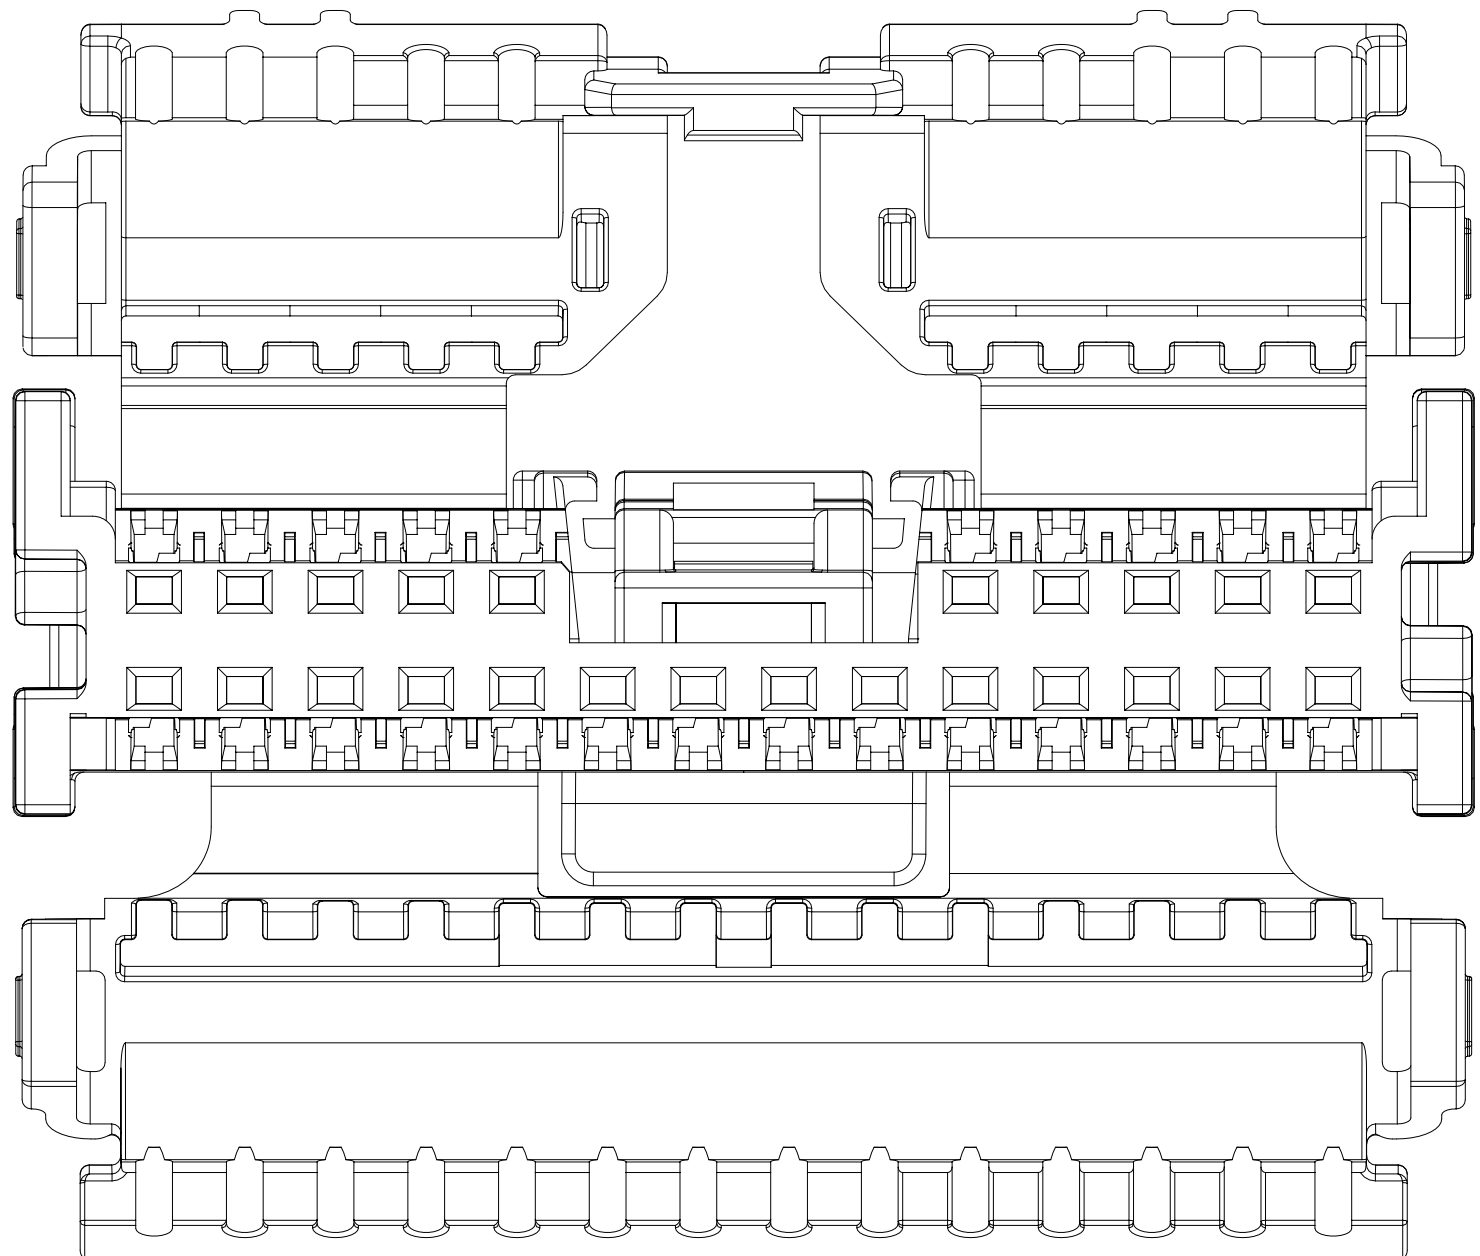


24 CIRCUIT POLARIZATION A

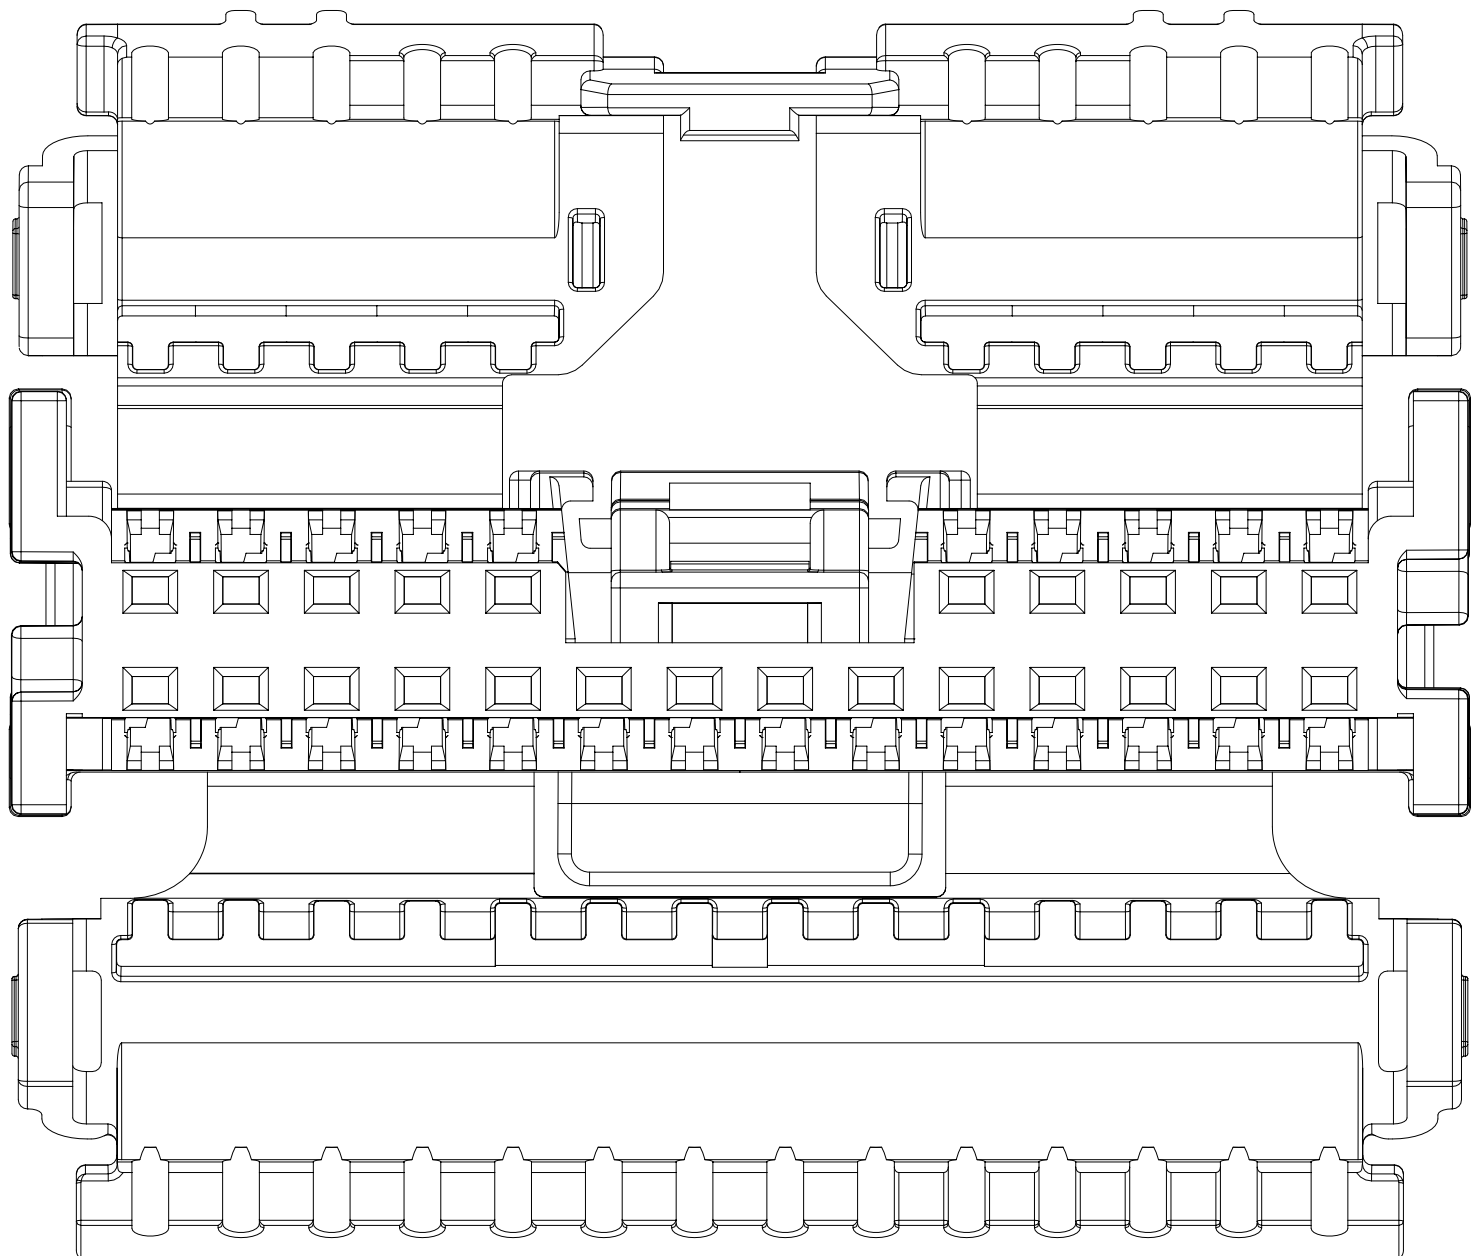

24 CIRCUIT POLARIZATION B

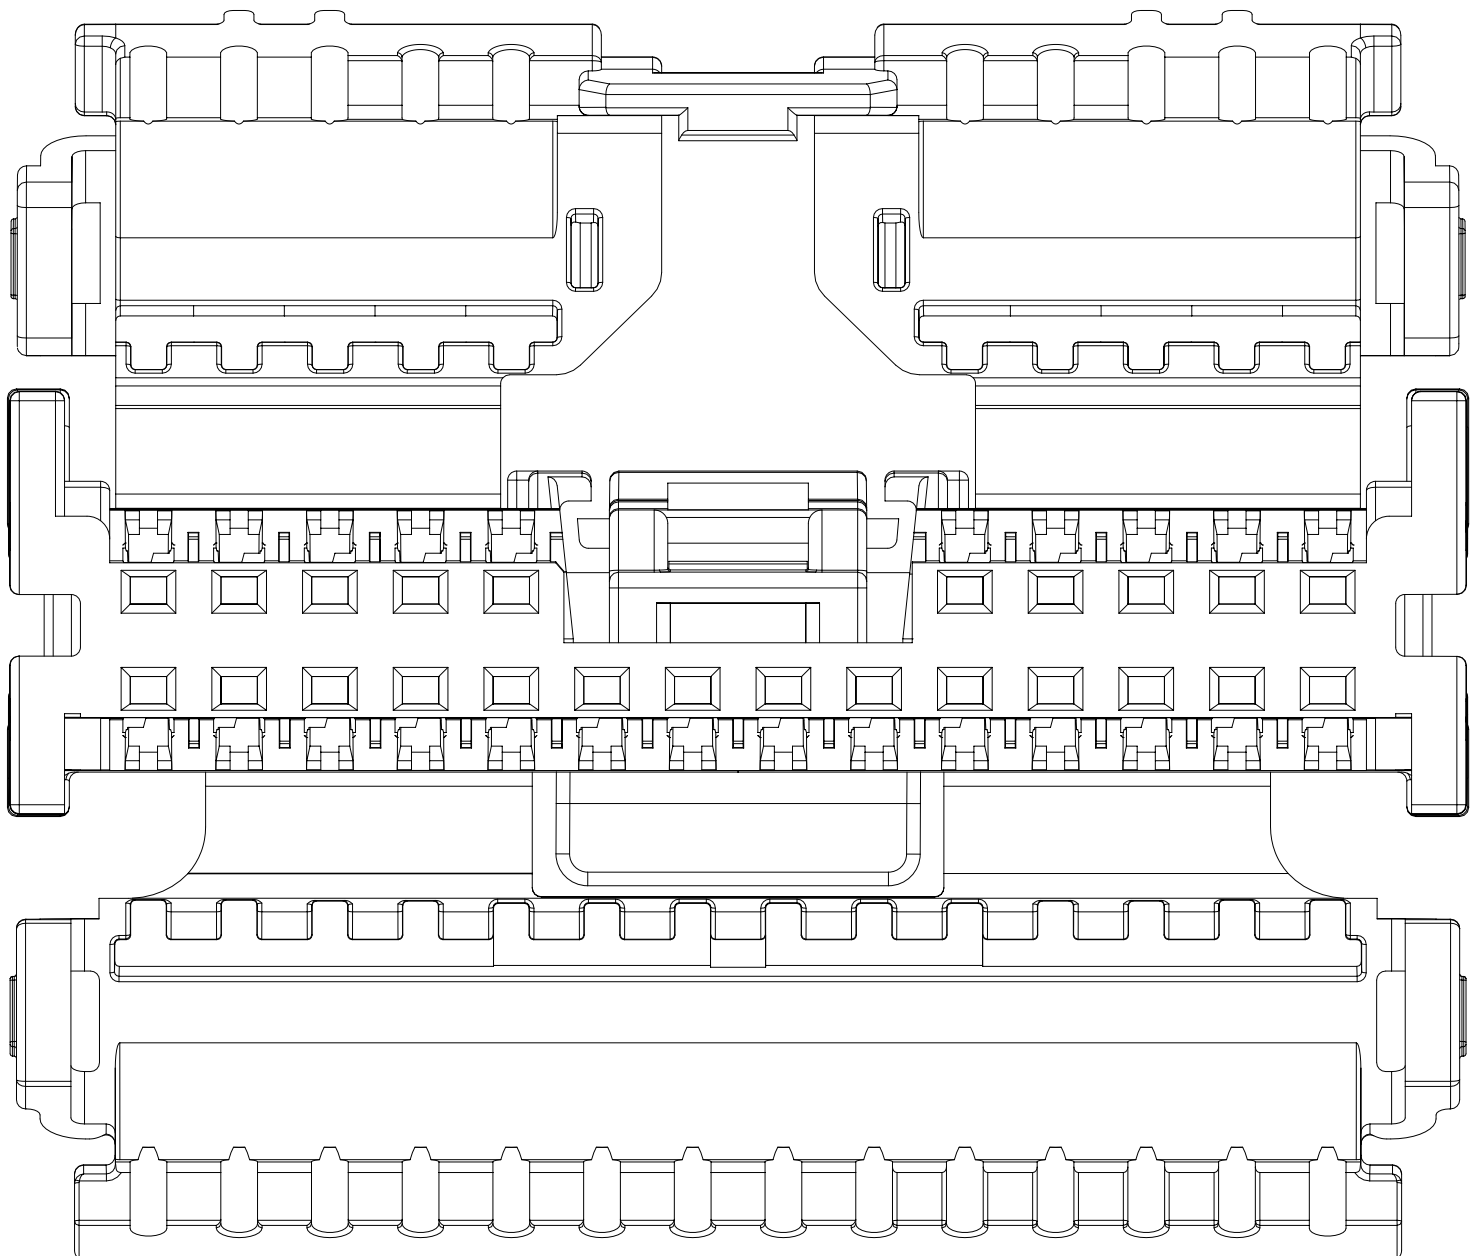


24 CIRCUIT POLARIZATION C

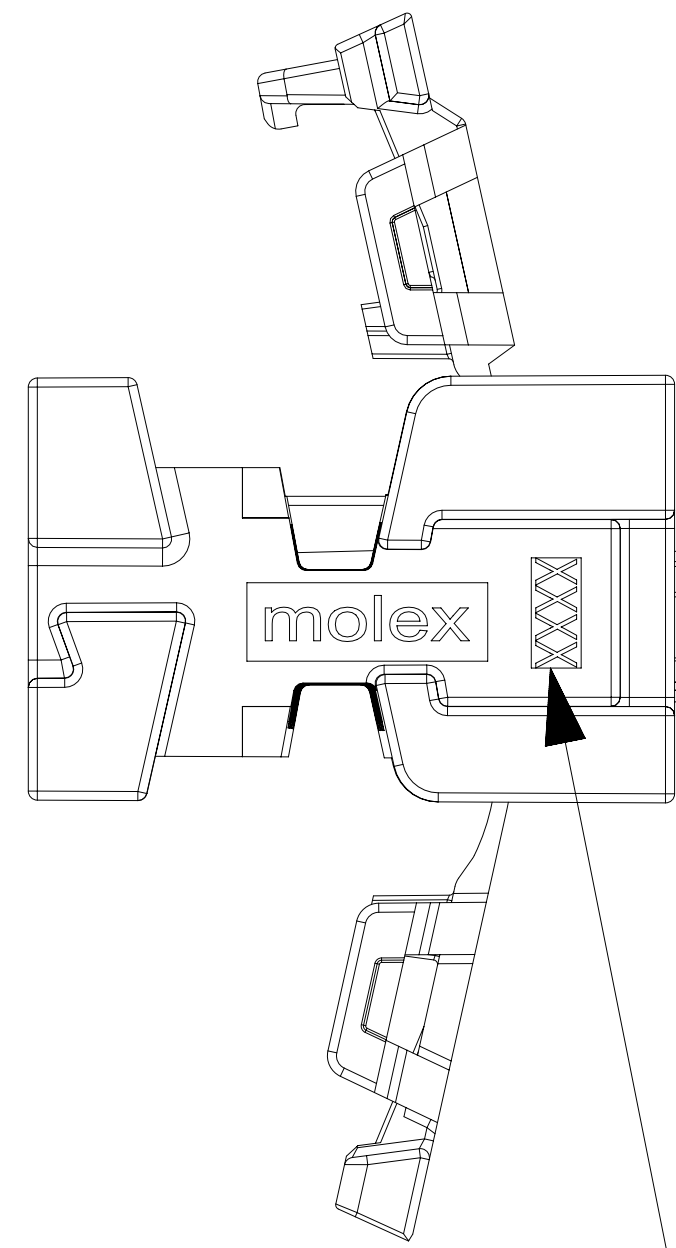


RECYCLING CODE
SEE BOM ON SHEET 3 FOR MATERIAL IDENTIFIER


CIRCUIT ID

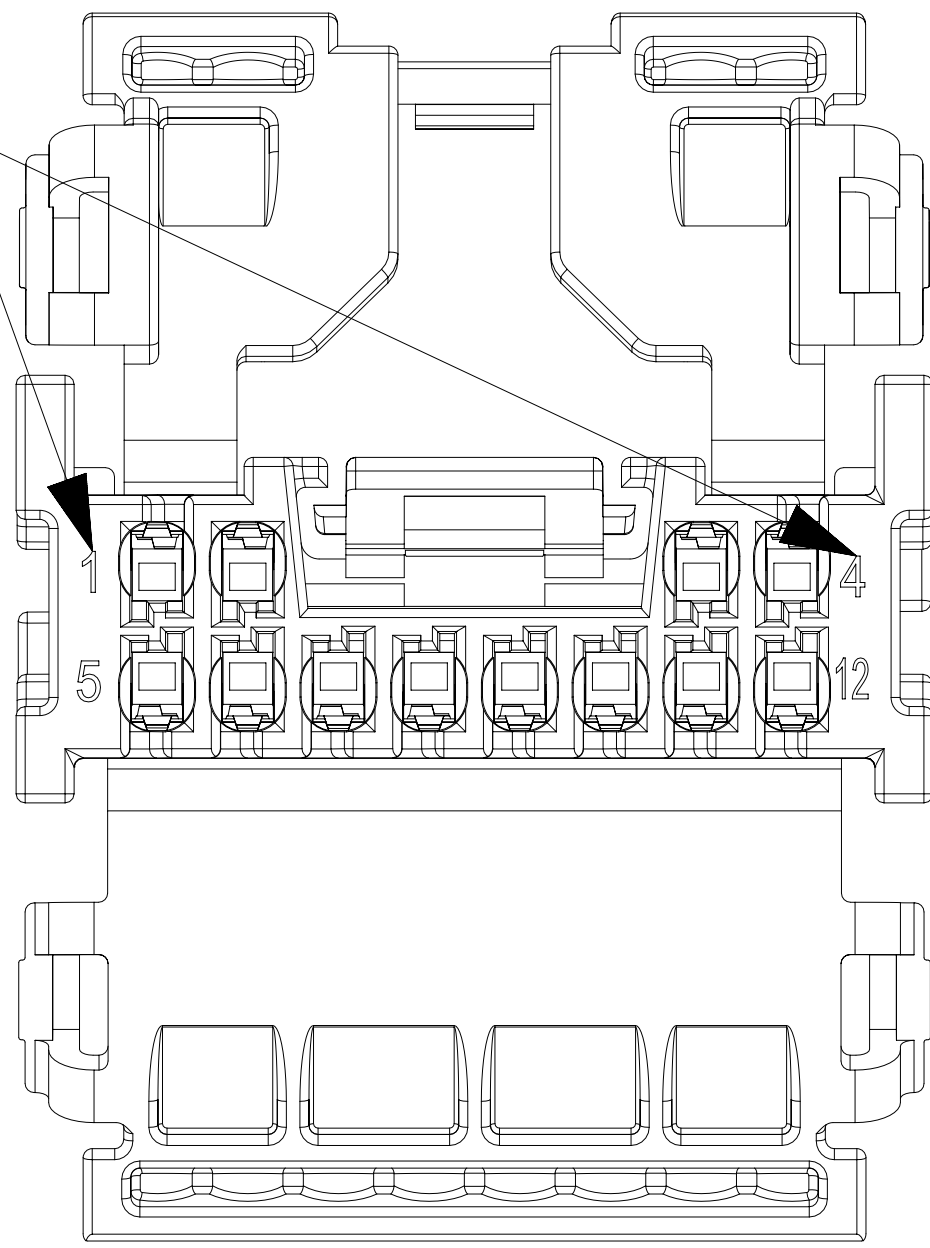

PART SERIES NUMBER

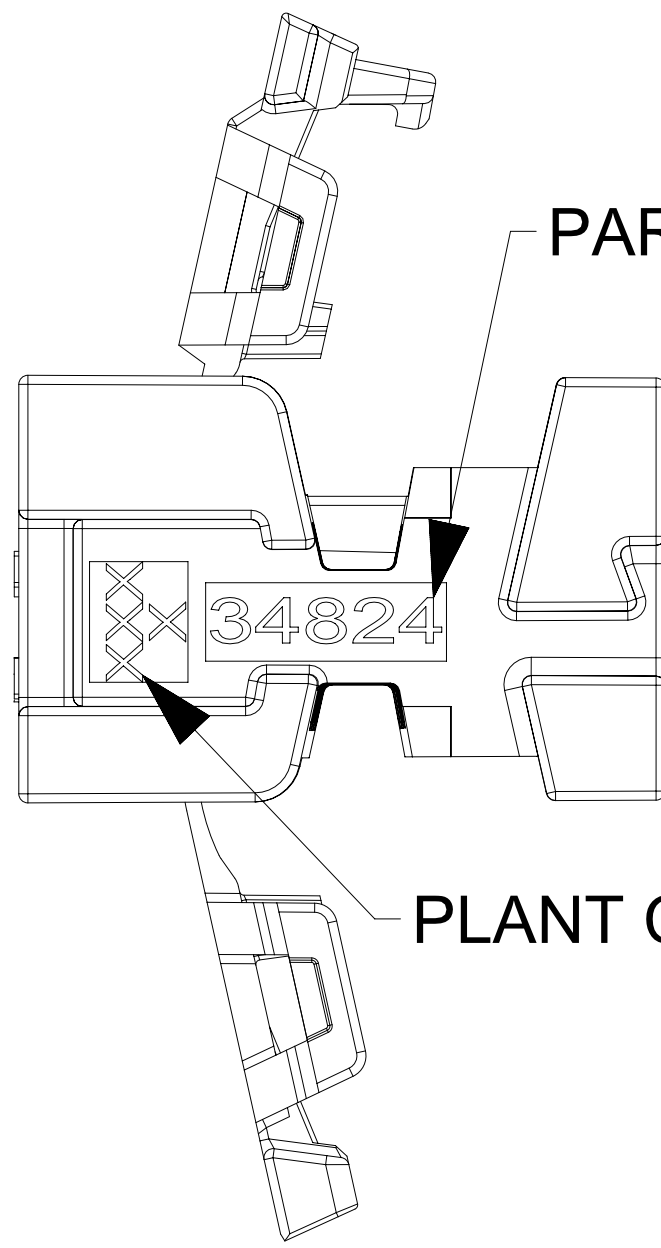


PLANT CODE & CAVITY ID

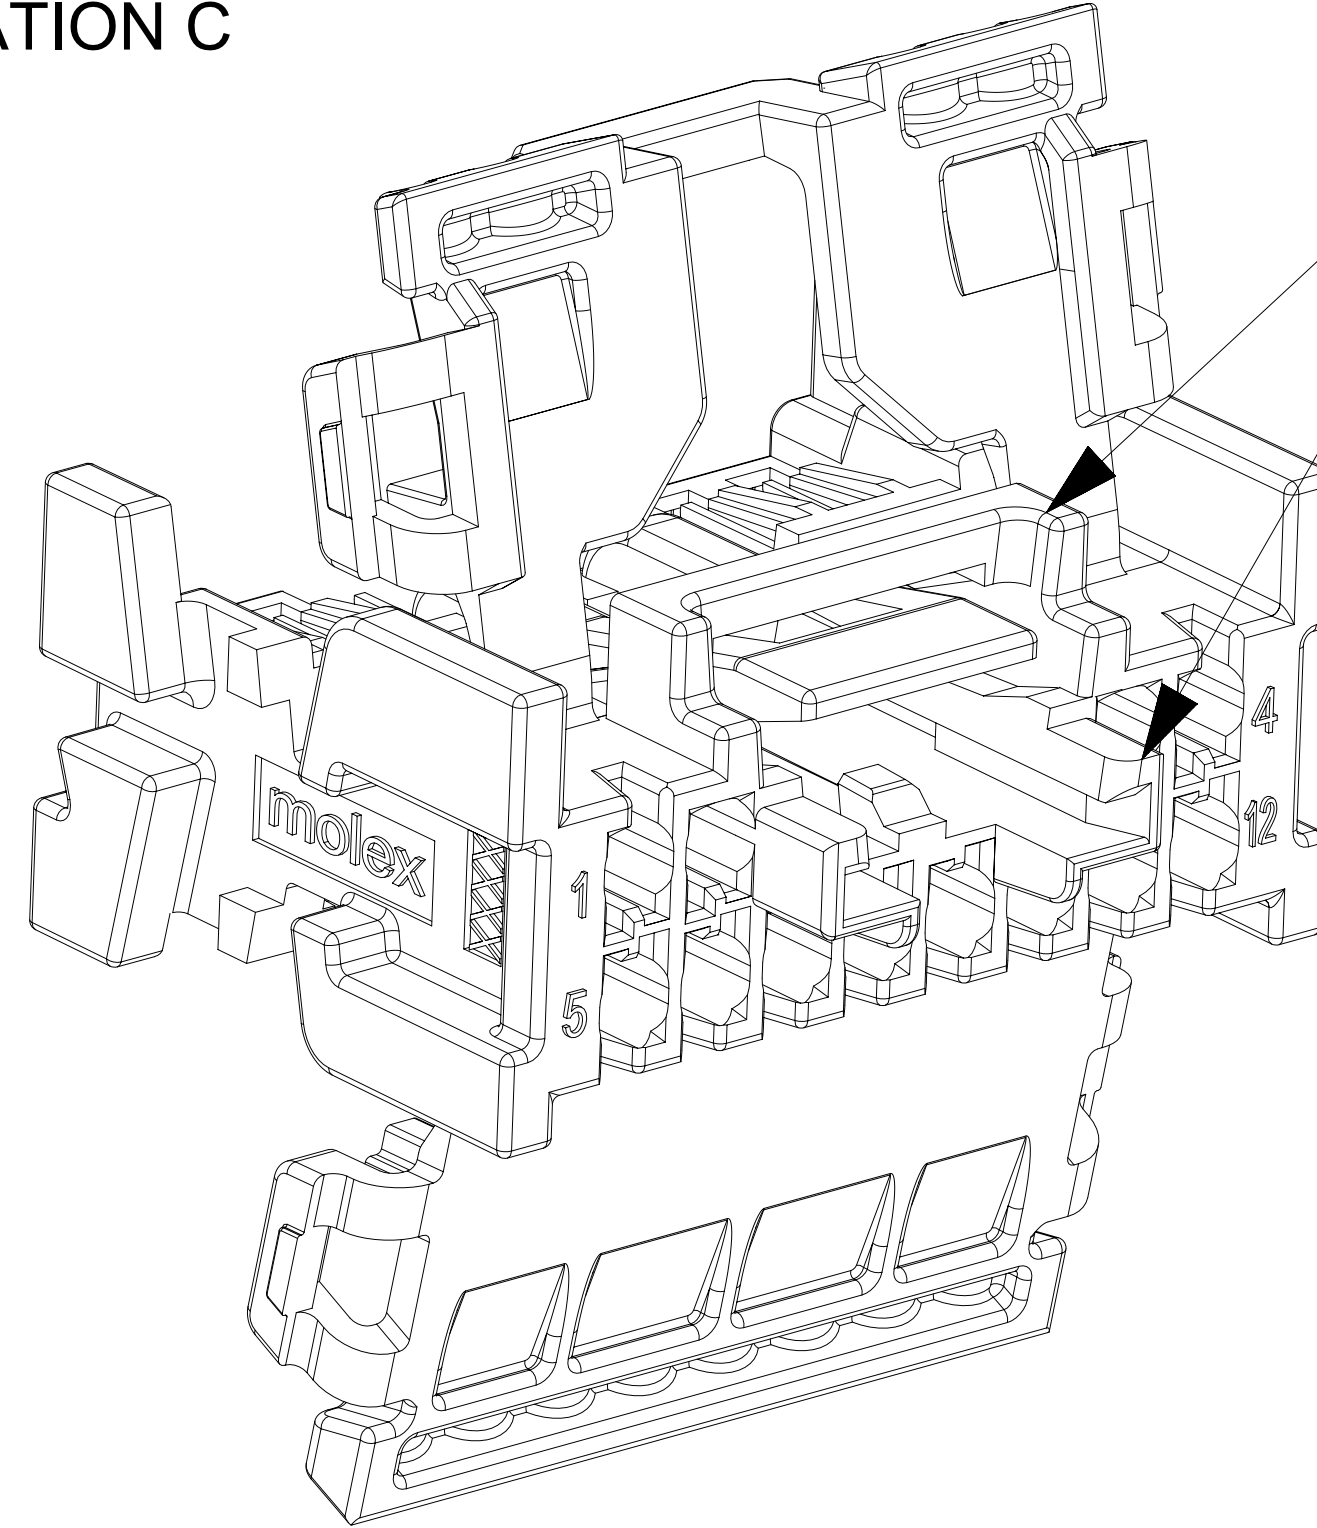

SCALE 7:1

BRIDGED OPTION

CPA TRAY
WITH BRIDGED OPTIONS

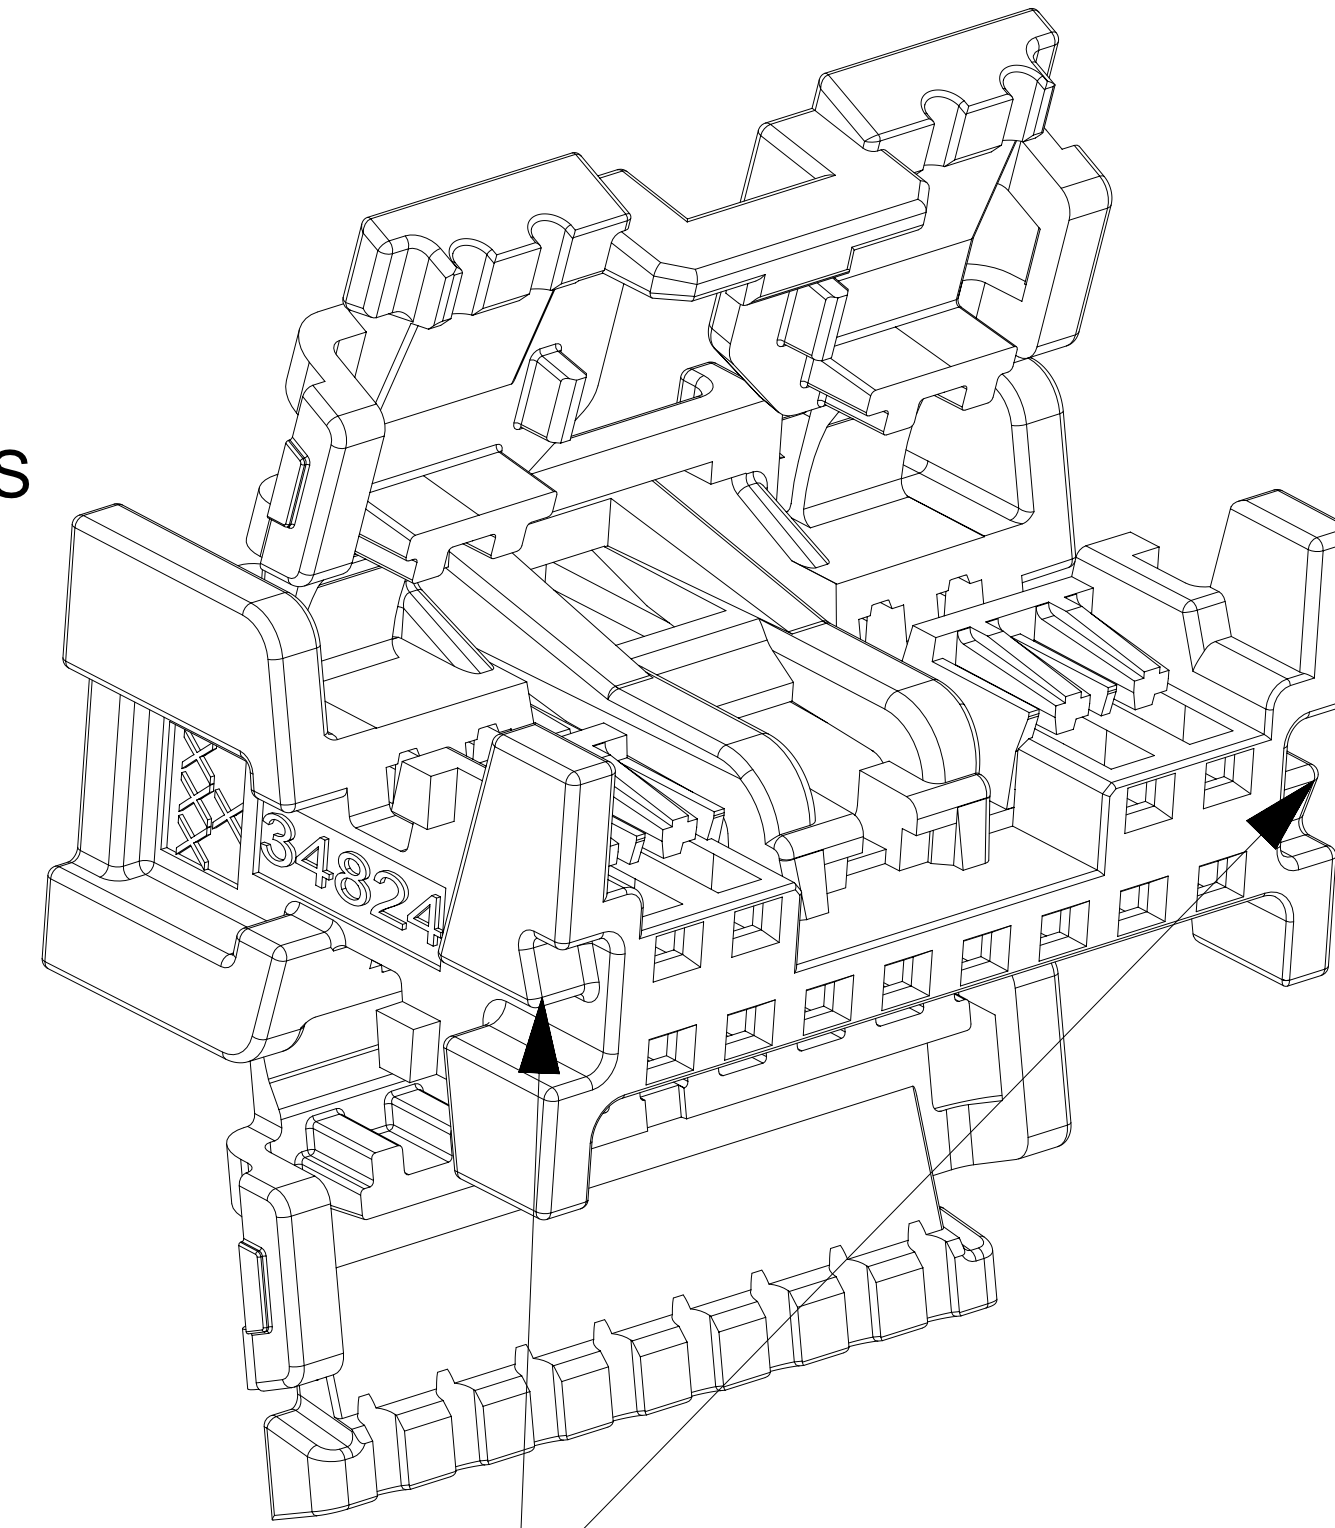

POLARIZATION FEATURES


SCALE 7:1

1. GENERAL:
- a. APPLICATION SPECIFICATION SEE: AS-34791-020
 - b. PRODUCT SPECIFICATION SEE: PS-34791-020
 - c. PACKAGING SPECIFICATION PER MOLEX DRAWING: SEE CHART
 - d. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: QEHS-699000-301
 - e. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
 - f. FLAMMABILITY REQUIREMENT: PER ISO3795 OR GM3191
 - 1. BURN RATE 100 mm/MIN MAXIMUM
 - 2. MATERIAL MUST BE SELF EXTINGUISHING
 - g. VISUAL DEFECTS SHALL MEET COSMETIC STANDARD PS-45499-002 (Class B)
 - h. FOR TERMINAL USAGE, REFER TO MOLEX SALES DRAWING SD-560023-002 (PLAN OBSOLESCENCE IN 2024) AND 5600230800.
 - j. 16-24CKT PBT PARTS PLANNED FOR OBSOLESCENCE FEB 2021
ECOPAXX VERSIONS WILL SERVE AS REPLACEMENT
2. DESIGN - MATERIALS: SEE P/N TABLE
3. DESIGN - GEOMETRY:
- a. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.
 - b. GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 2009
 - c. GENERAL TOLERANCES:
 - LINEAR: PER DIN 16901 CODE B FOR PRECISION ENGINEERING (SEE TABLE)
 - ANGULAR: $\pm 3^\circ$
 - d. EDGES AND UNDIMENSIONED DETAILS PER ISO13715
 - e. CORNERS SHOWN AS SHARP TO BE R 0.2 MAX
 - f. LETTERING SHALL BE 0.1 MAX RAISED IN 0.15 MAX RECESS PAD AND NOT PROTRUDE THE SURFACE. THIS INCLUDES RECYCLING CODE, PLANT AND CAVITY ID, VENDOR ID, CIRCUIT ID, AND PART SERIES NUMBER.
 - g. DIMENSION APPLIES ONLY TO RECEPTACLES WITH LOCK BRIDGE OPTION.
 - h. DIM 9 & 12 TOLERANCE $+0.30/-0.15$ FOR ALL PA410 RECEPTACLES 16-24CKT.


INSPECTION BALLOON LOG		L9	ADDED TERMINAL SD-DRAWING 5600230800 AT NOTES 1-H ON SHEET 1
PER DRAWING REVISION: L9		L8	CHANGED RECYCLING CODE TO "XXXX"; WAS "PBT."
LAST BALLOON USED: 17		L7	OBSOLETE PART NUMBERS 348241200/01/02/40/41/42, 348241160/01/02, 348240160/01/02
ADDED BALLOON NUMBERS:		L6	DRAWING REMASTERED
REMOVED BALLOON NUMBERS: 1-7		L5	PAGE 1: ADDED NOTE 1)
		L4	PAGE 3: ADDED NOTE SYMBOL TO BOM
		L3	VERTICAL PITCH DIMENSION ADDED
		L2	UPDATED PIN TABLE TO SHOW MATERIAL
		L1	DESCRIPTION

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
		DIMENSION UNITS		SCALE		CURRENT REV DESC:									
		MM		6:1											
		GENERAL TOLERANCES (UNLESS SPECIFIED)													
		ANGULAR TOL ± 0.5°													
		4 PLACES		±											
3 PLACES		±													
2 PLACES		± 0.100													
DIVISIONAL SYMBOLS		1 PLACE		± 0.20		STATUS: Production DRWN: Yann Chen CHK'D: Gang Li APPR: Colin Zhang				2023-10-20 2023-10-25 2023-10-30					
		0 PLACES		±											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										THIRD ANGLE PROJECTION		DRAWING	
						E-SIZE		34824		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
										SD-34824-002		PSD		001 L9	
												GENERAL MARKET		1 OF 3	


12 CIRCUIT

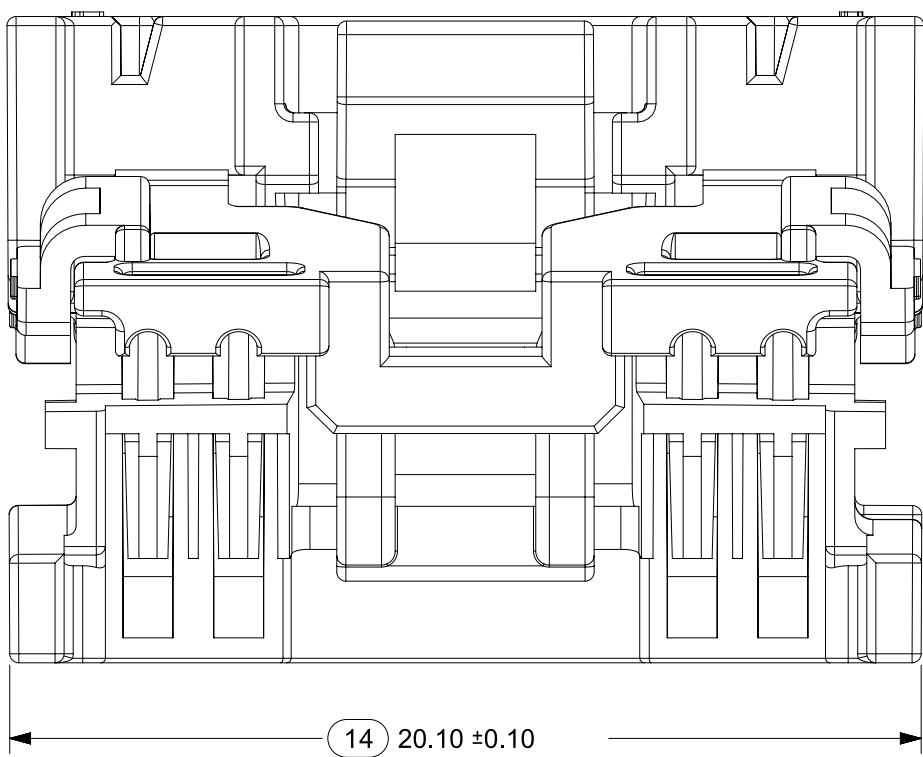











16 CIRCUIT

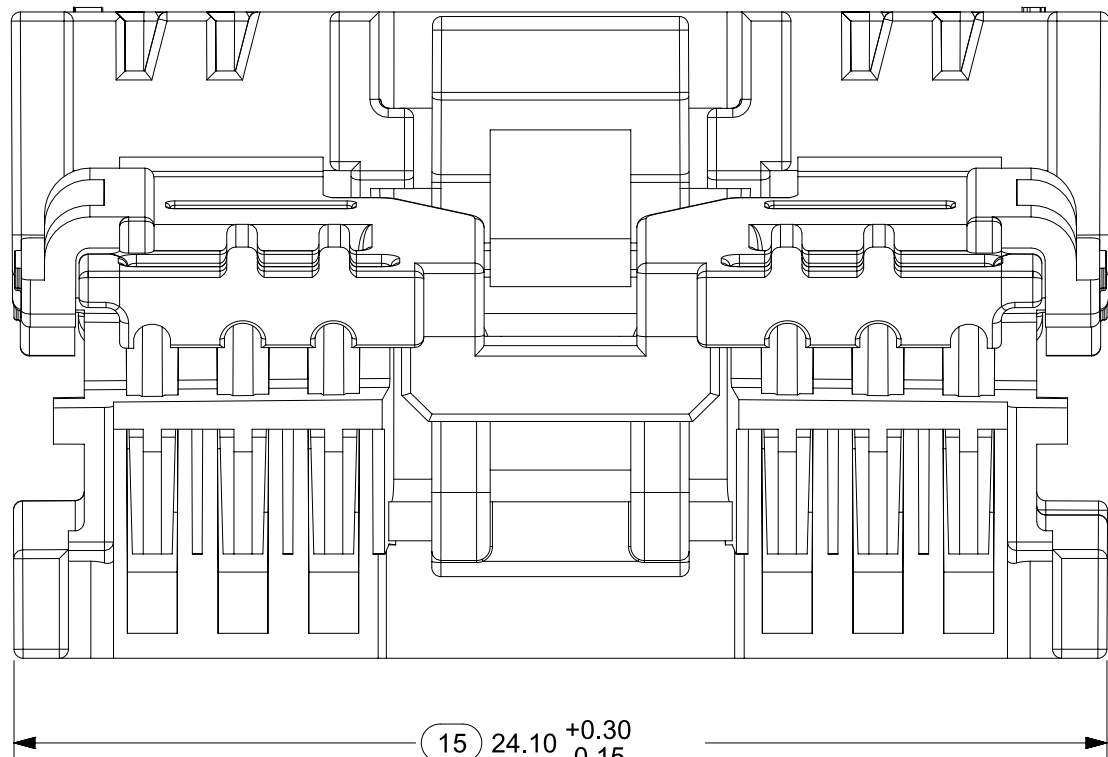

20 CIRCUIT

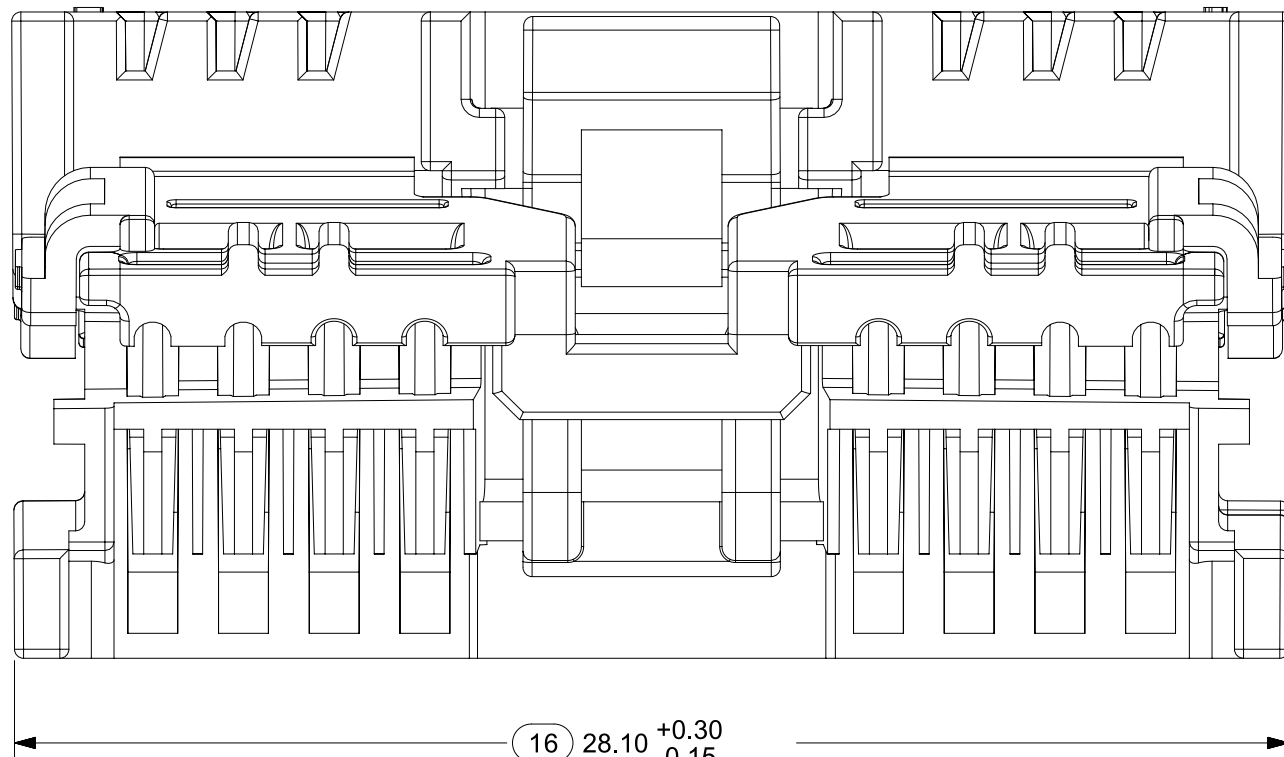

24 CIRCUIT

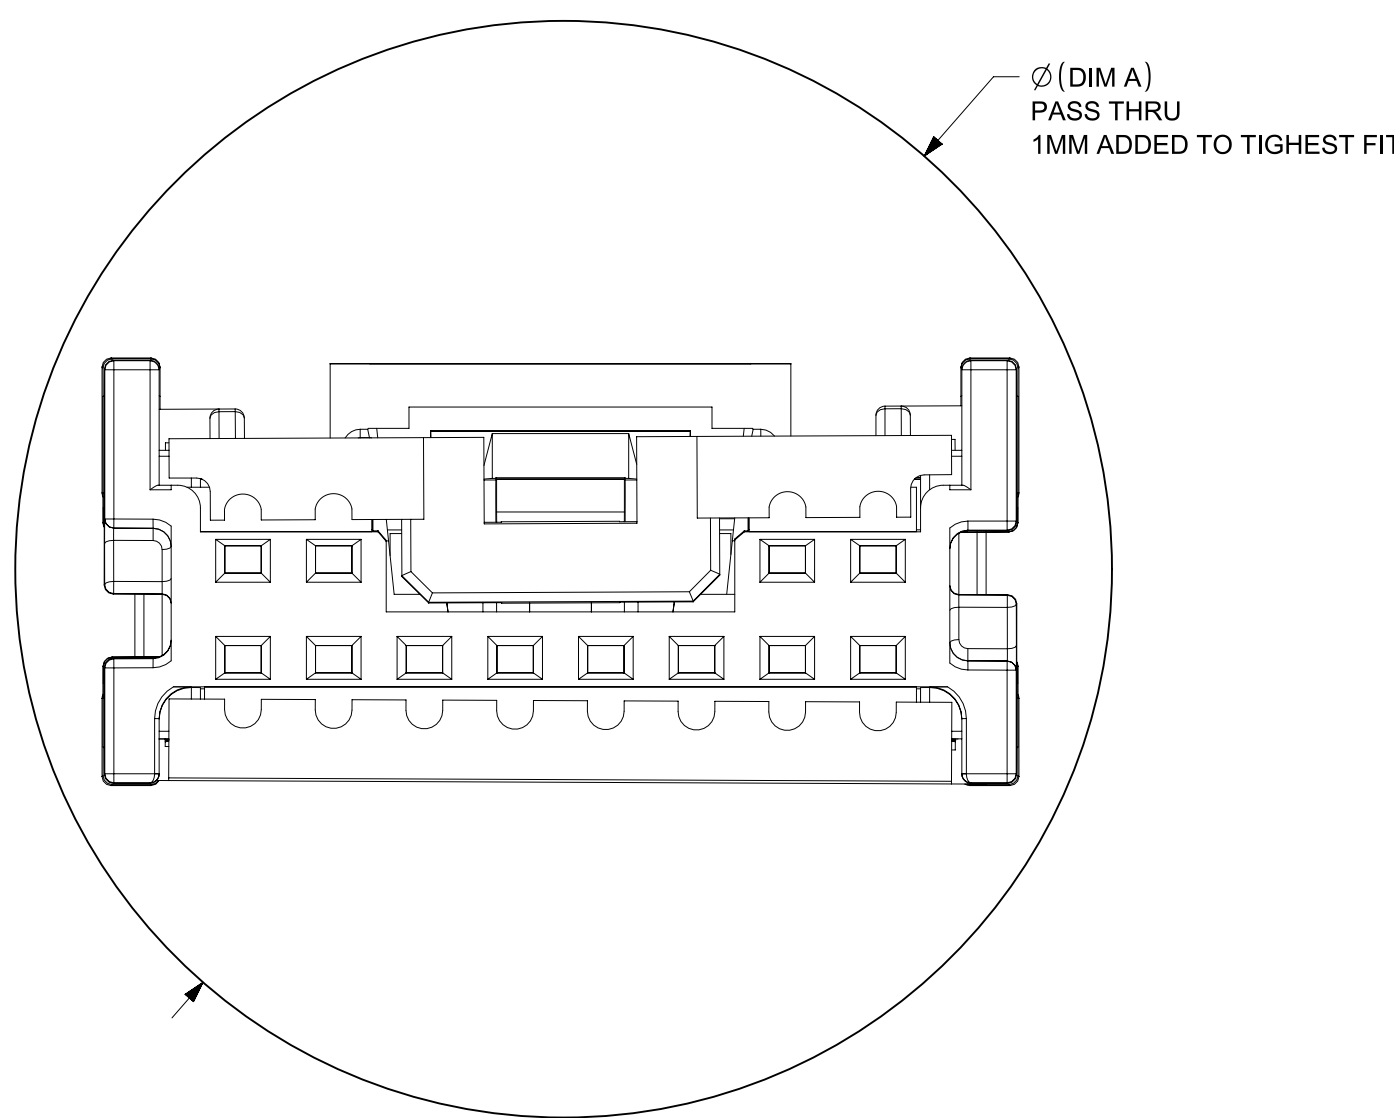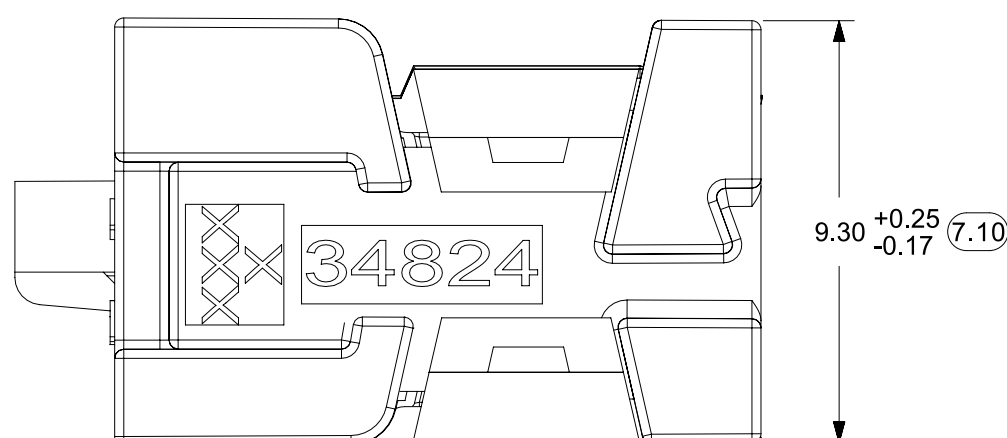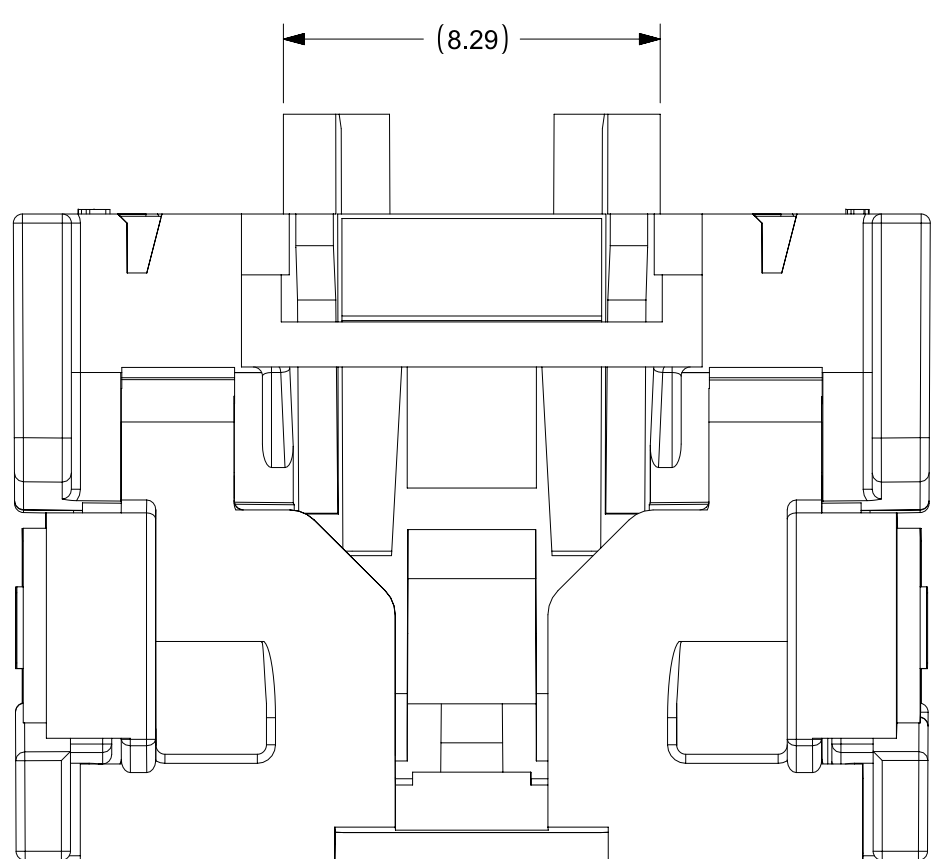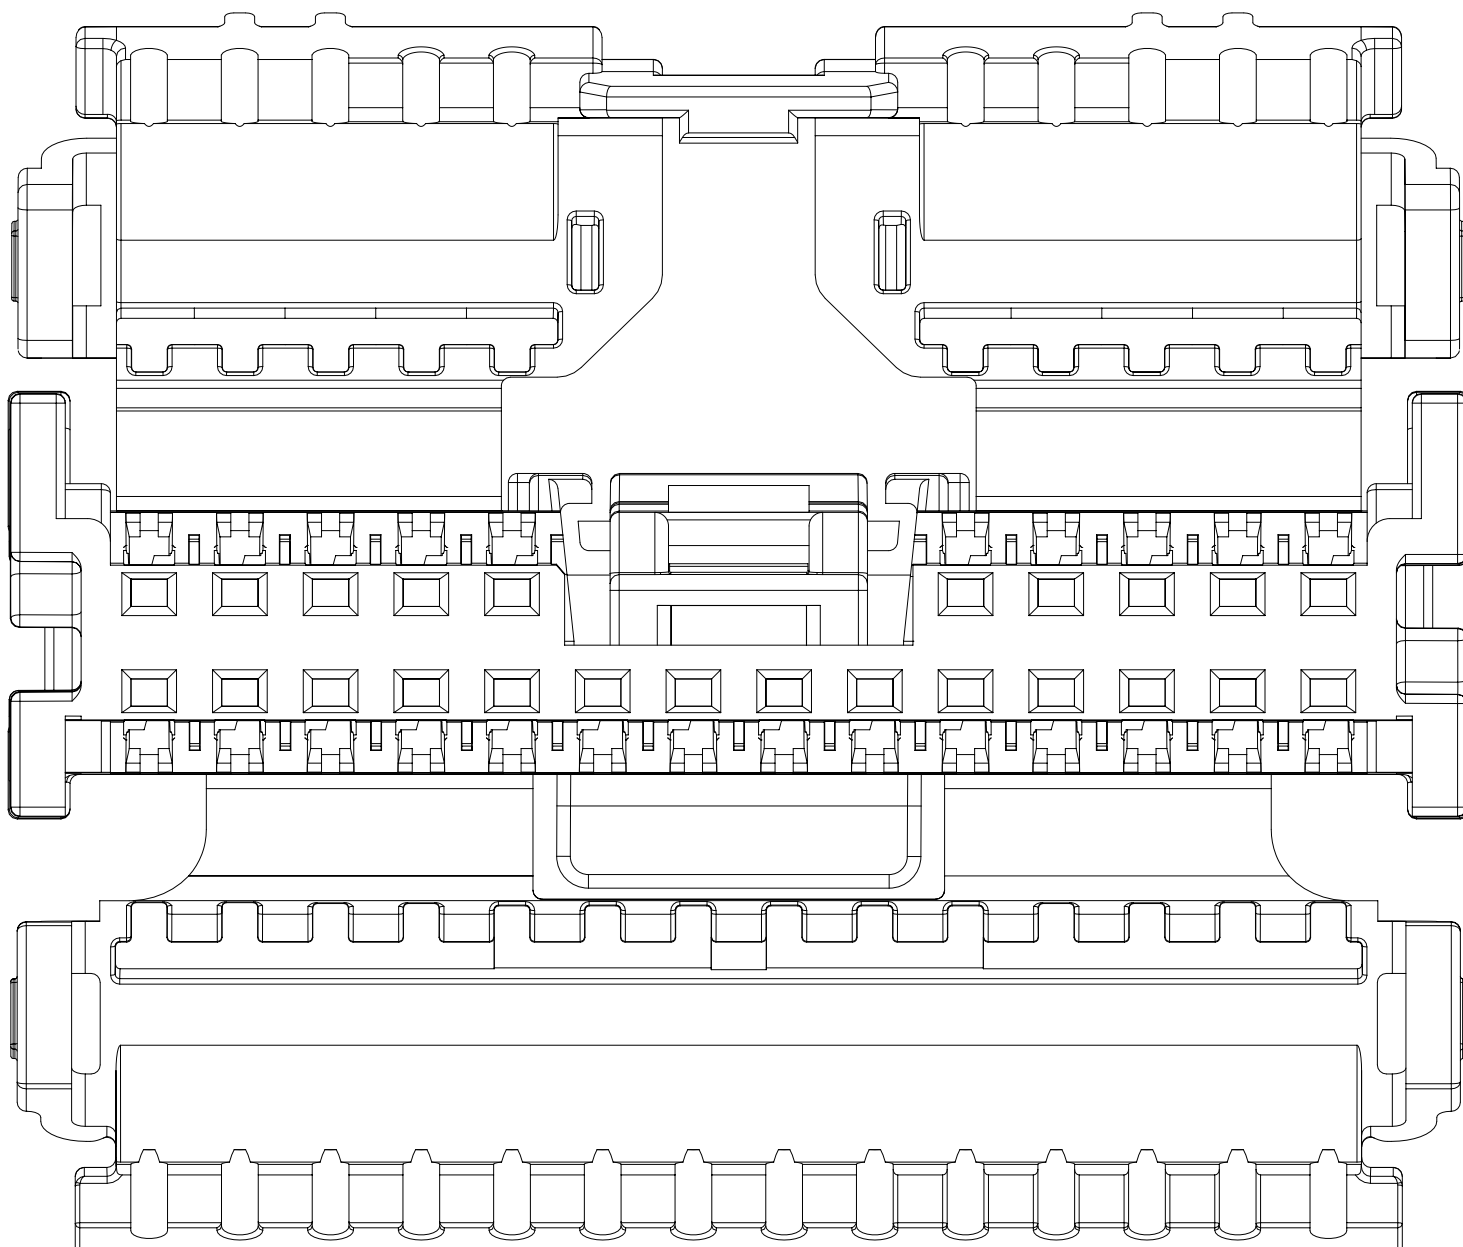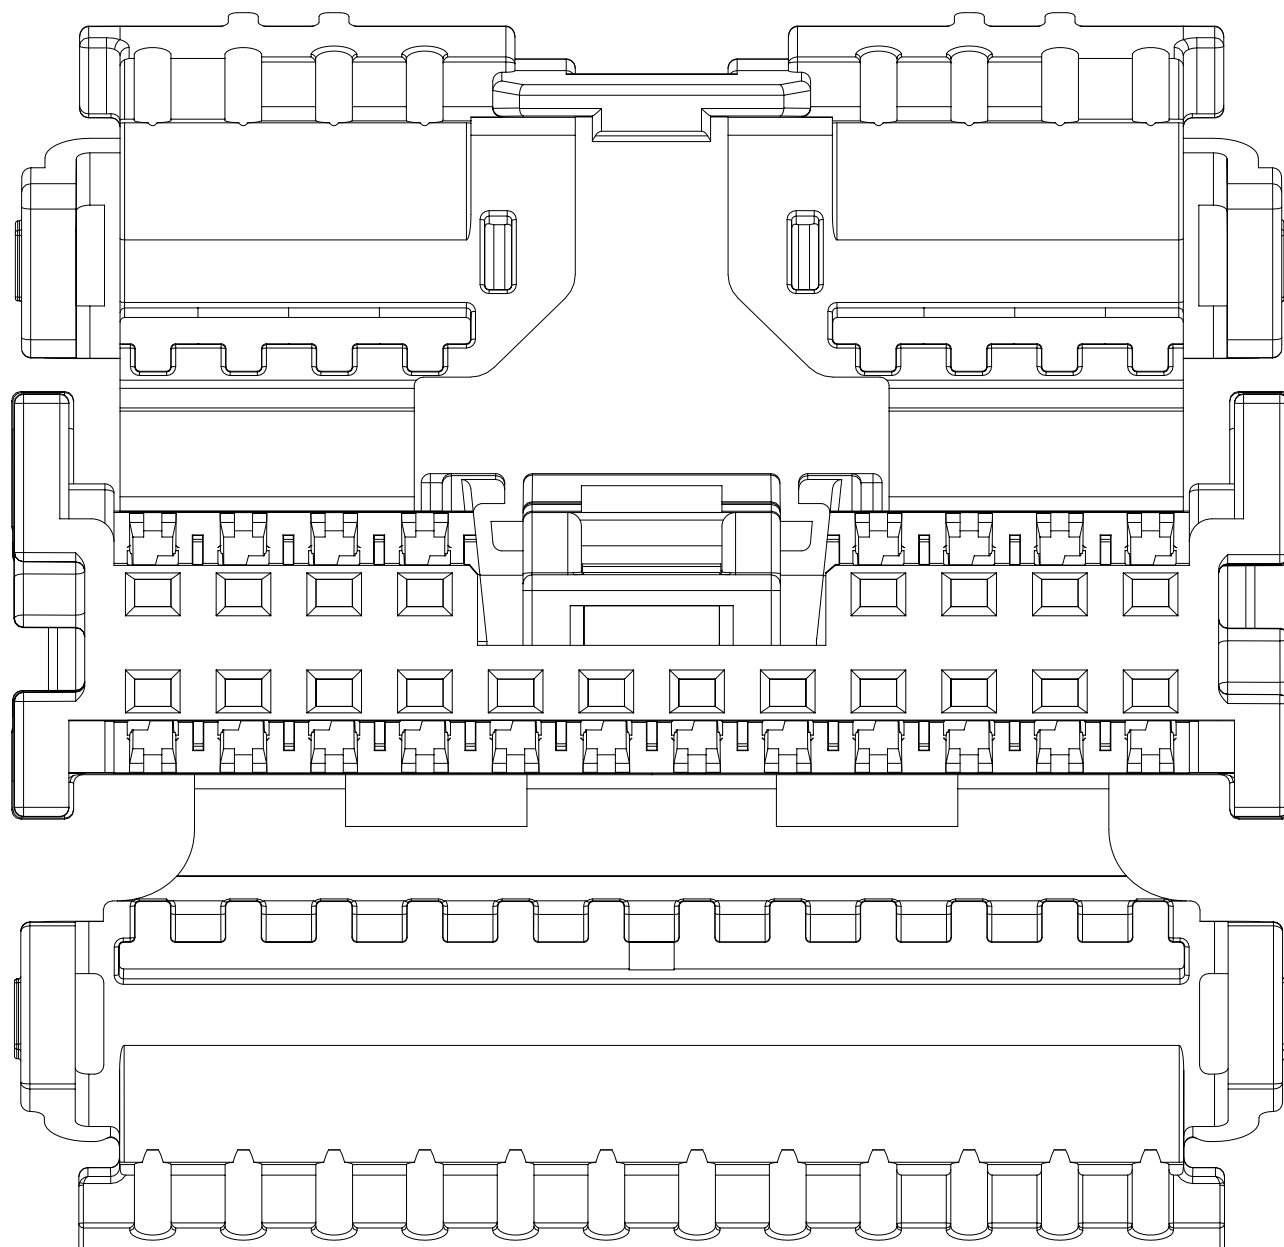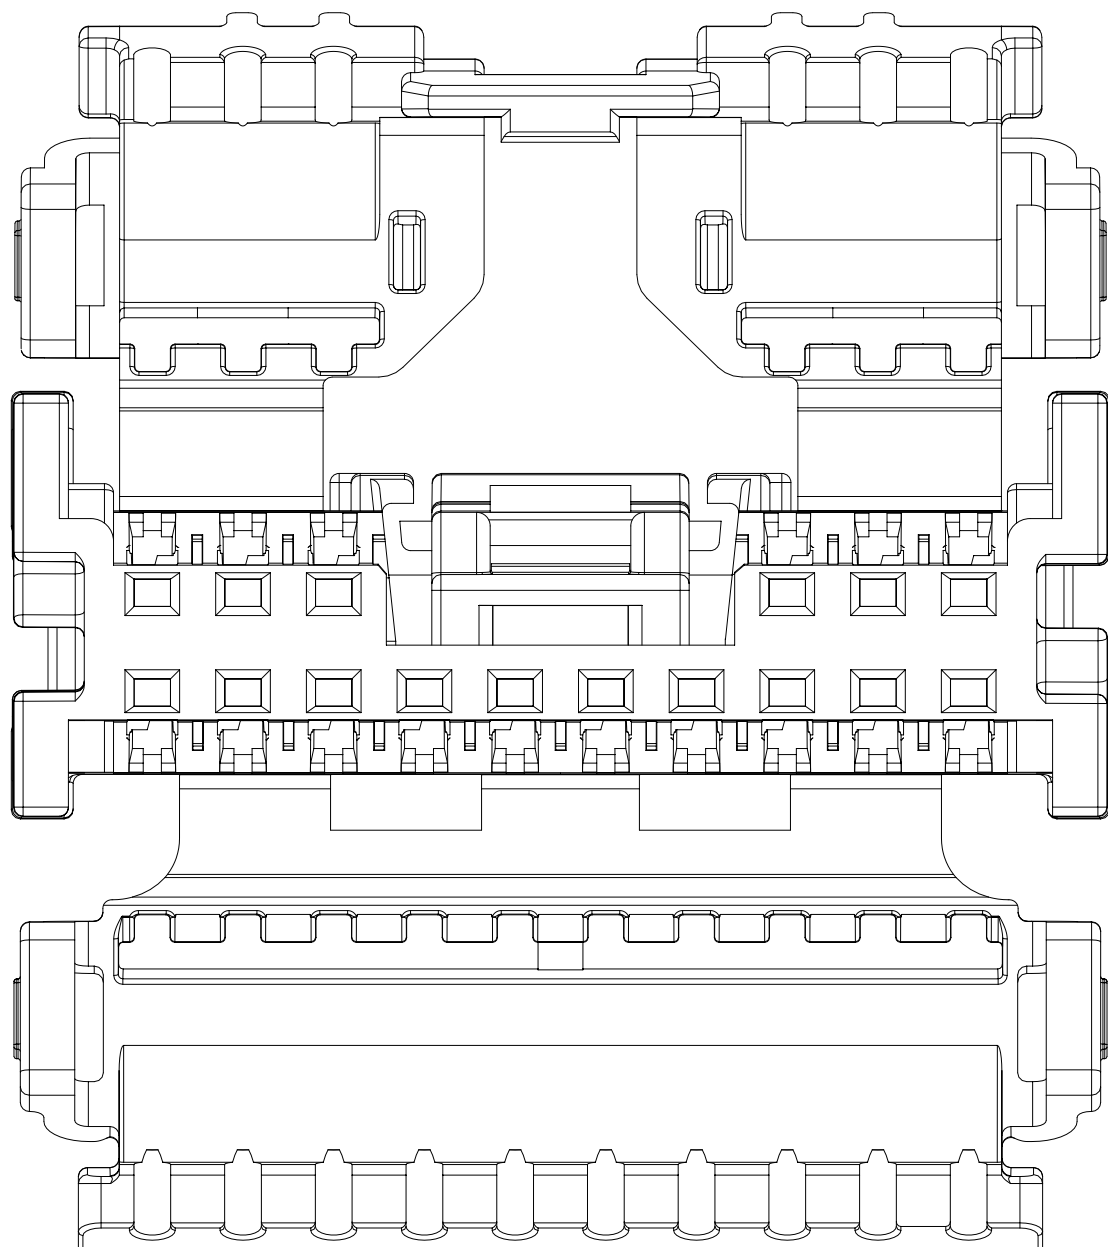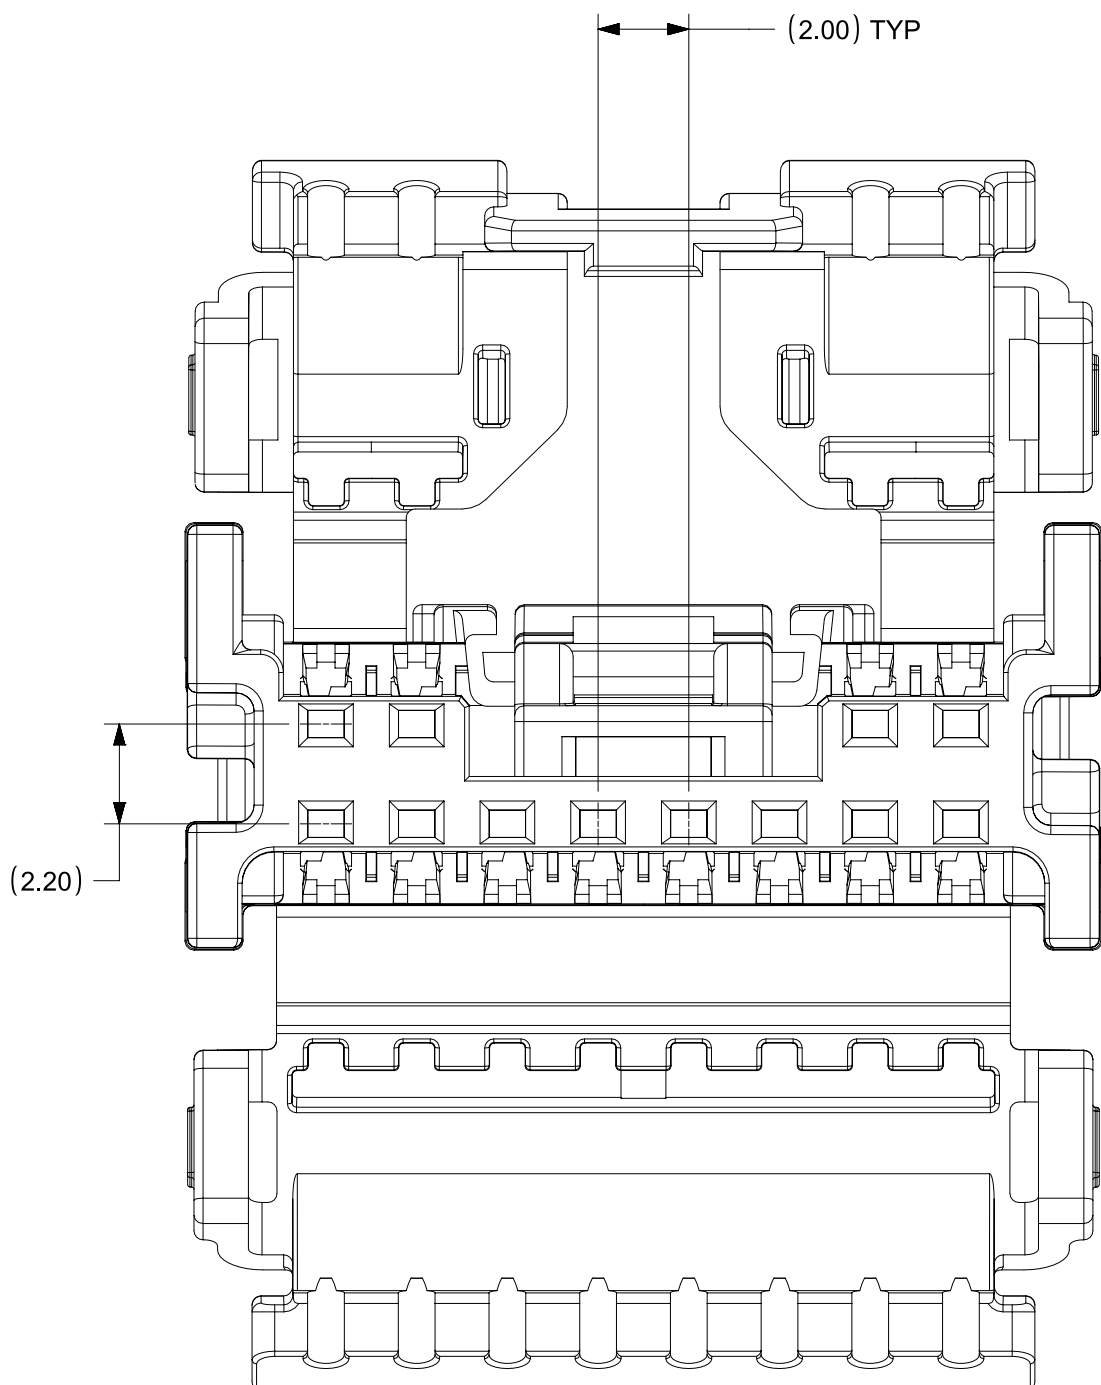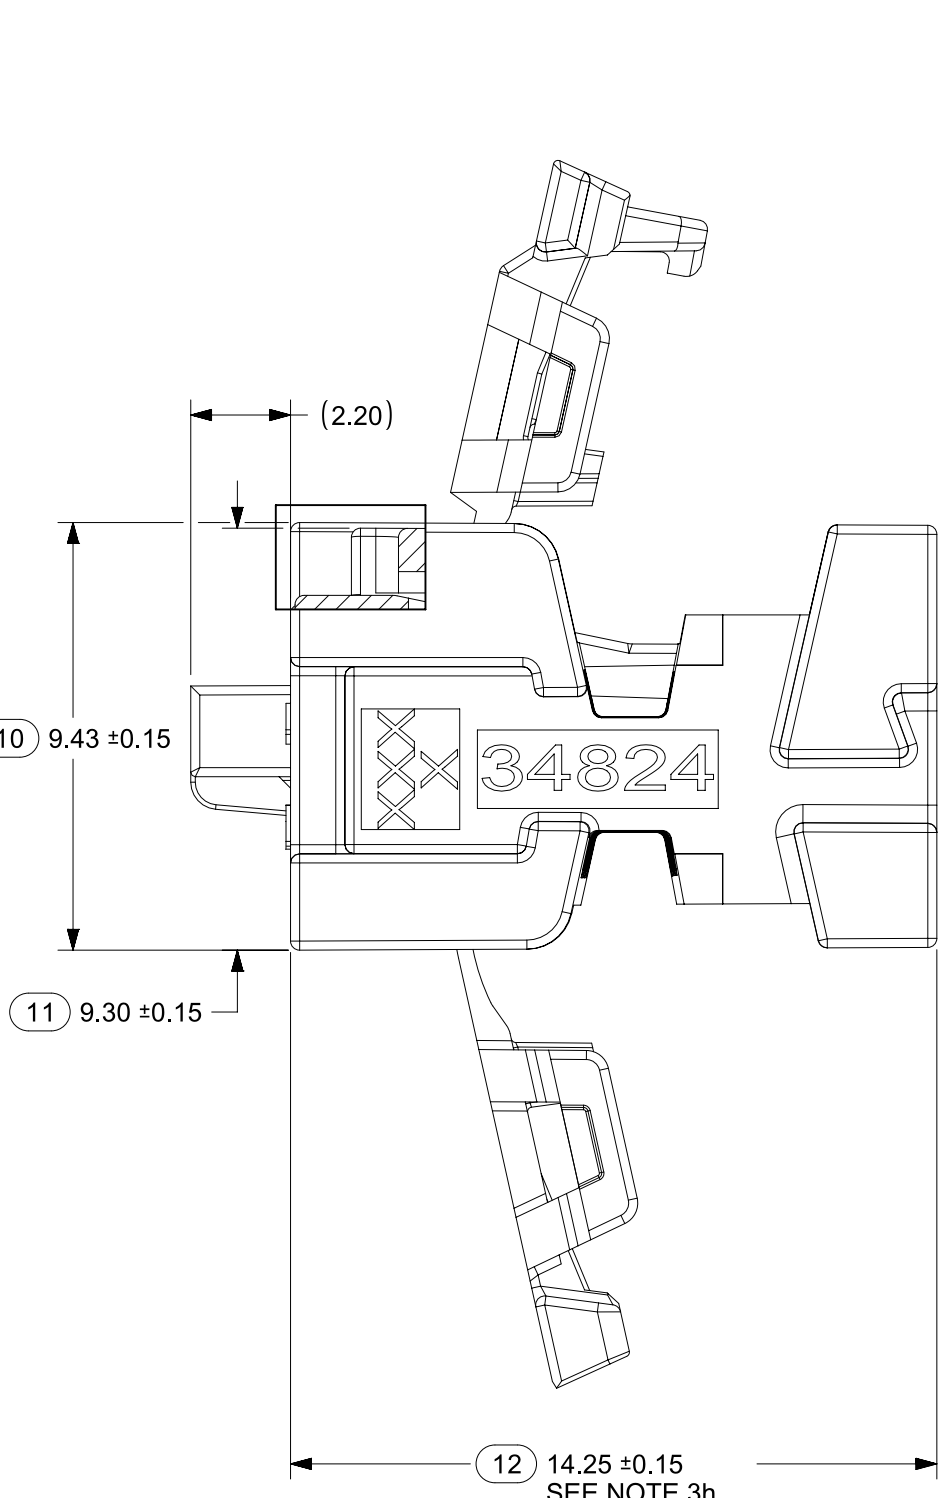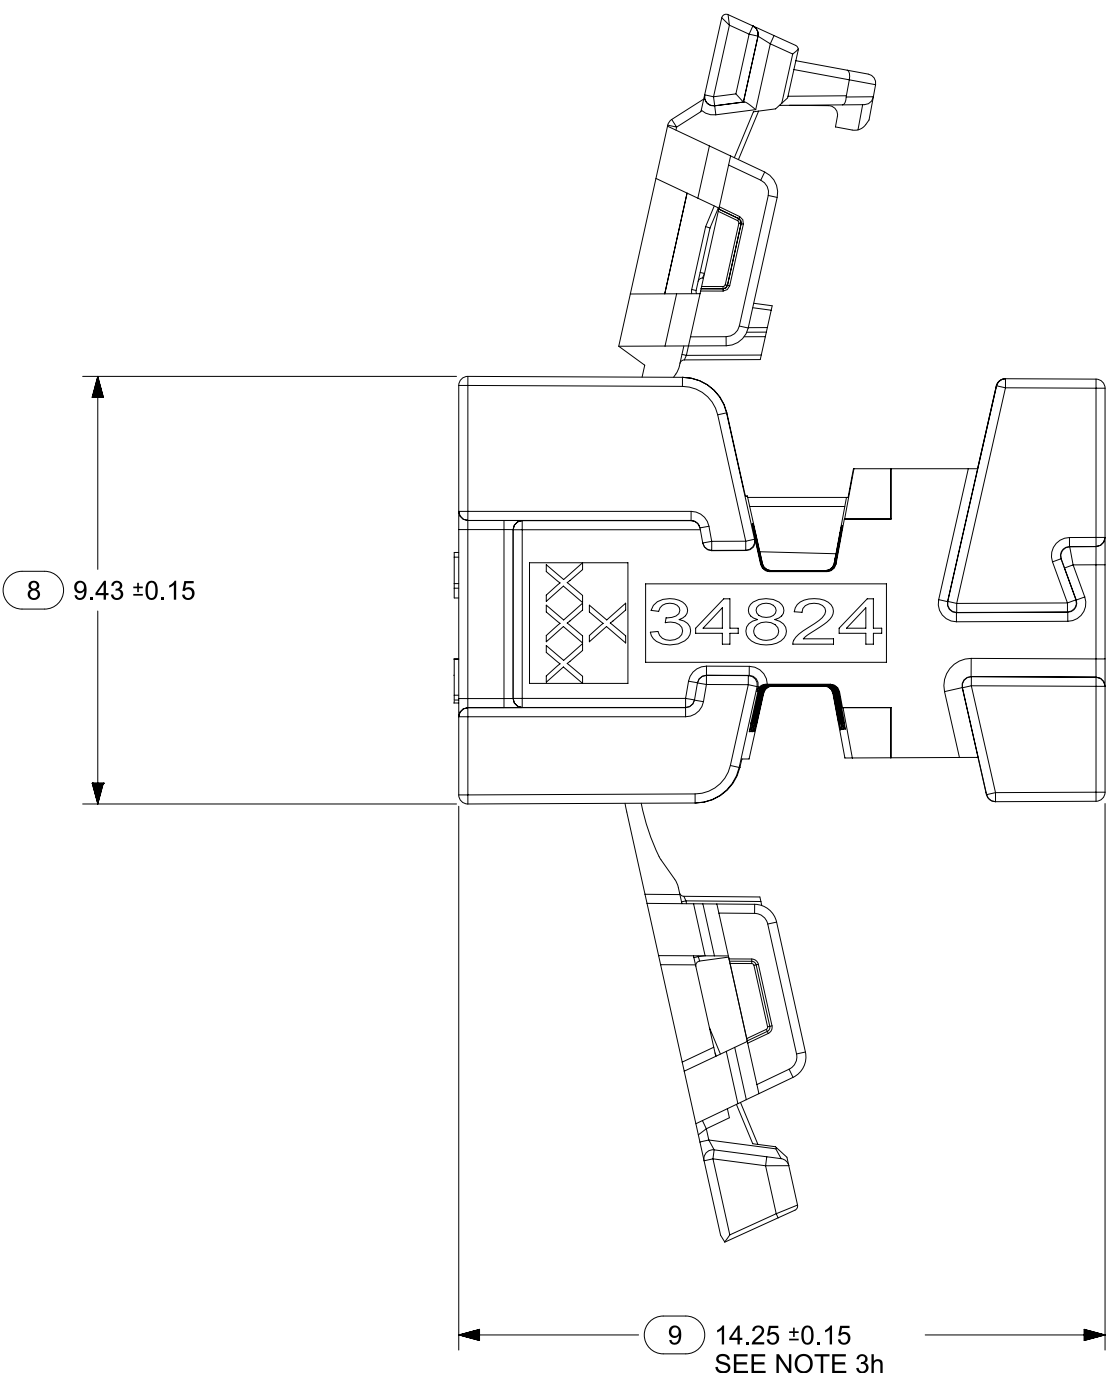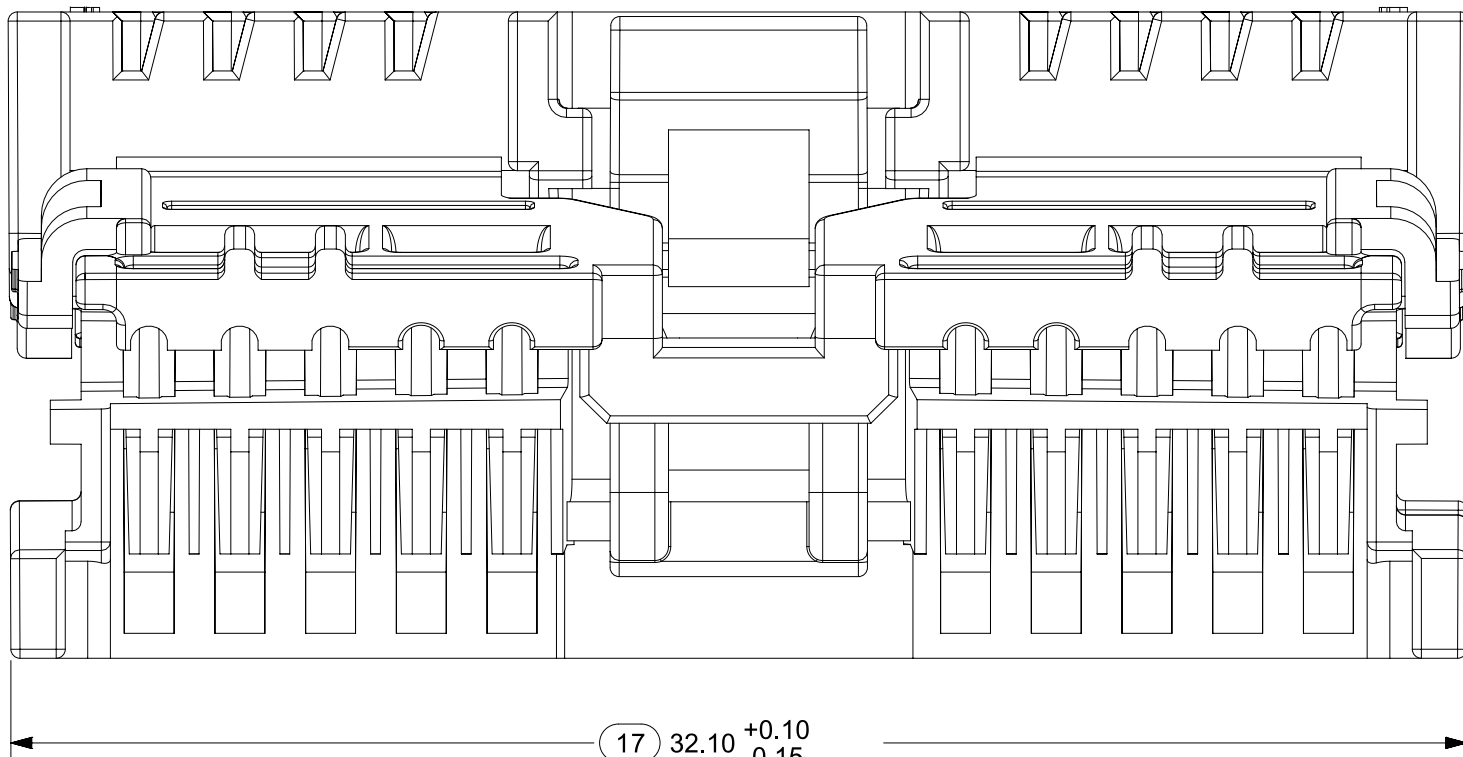


PASS THRU DIM TABLE

CIRCUIT SIZE	DIM A
12	24.18
16	27.88
20	31.64
24	35.48

FUNCTIONAL SYMBOLS = 0 = 0 = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	DIMENSION UNITS	SCALE	CURRENT REV DESC:				
	MM	6:1					
	GENERAL TOLERANCES (UNLESS SPECIFIED)						
	ANGULAR TOL	± 0.5°					
4 PLACES	±						
3 PLACES	±	STATUS: Production DRWN: Yann Chen CHK'D: Gang Li APPR: Colin Zhang	2023-10-20 2023-10-25 2023-10-30	molex			
2 PLACES	± 0.100			MINI50 DUAL ROW RECEPTACLE SALES DWG			
1 PLACE	± 0.20			PRODUCT SALES DRAWING			
0 PLACES	±			DOCUMENT NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
			E-SIZE	34824		GENERAL MARKET	2 OF 3

MINI50 RECEPTACLES - PBT


MATERIAL NUMBER BULK PACKAGING PK-31301-538	LOCK BRIDGE	CIRCUIT	POL	COLOR	MATERIAL	MATING COMPONENT					
						SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER		RIGHT ANGLE THRU HOLE HEADER	
						TAPE AND REEL PACKAGING PK-31301-786	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688
34824-0124	NO	12	A	BLACK	PBT	34897-8120	34897-9120	34825-0124	34825-9124	34826-0124	34826-9124
34824-0125	NO	12	B	GRAY		34897-8121	34897-9121	34825-0125	34825-9125	34826-0125	34826-9125
34824-0126	NO	12	C	DARK GRAY		34897-8122	34897-9122	34825-0126	34825-9126	34826-0126	34826-9126
34824-1124	YES	12	A	BLACK		34897-8120	34897-9120	34825-0124	34825-9124	34826-0124	34826-9124
34824-1125	YES	12	B	GRAY		34897-8121	34897-9121	34825-0125	34825-9125	34826-0125	34826-9125
34824-1126	YES	12	C	DARK GRAY		34897-8122	34897-9122	34825-0126	34825-9126	34826-0126	34826-9126

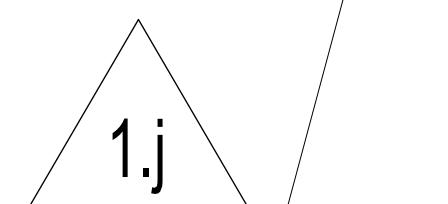


MINI50 RECEPTACLES - PA410

MATERIAL NUMBER BULK PACKAGING PK-31301-538	LOCK BRIDGE OPTION	CIRCUIT	POL	COLOR	MATERIAL	MATING COMPONENT					
						SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER		RIGHT ANGLE THRU HOLE HEADER	
						TAPE AND REEL PACKAGING	TUBE PACKAGING	TRAY PACKAGING	TUBE PACKAGING	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688
34824-0164	NO	16	A	BLACK	PA410	34897-8160	34897-9160	34825-0160	34825-9160	34826-0160	34826-9160
34824-0165	NO	16	B	GRAY		34897-8161	34897-9161	34825-0161	34825-9161	34826-0161	34826-9161
34824-0166	NO	16	C	DARK GRAY		34897-8162	34897-9162	34825-0162	34825-9162	34826-0162	34826-9162
34824-1164	YES	16	A	BLACK		34897-8160	34897-9160	34825-0160	34825-9160	34826-0160	34826-9160
34824-1165	YES	16	B	GRAY		34897-8161	34897-9161	34825-0161	34825-9161	34826-0161	34826-9161
34824-1166	YES	16	C	DARK GRAY		34897-8162	34897-9162	34825-0162	34825-9162	34826-0162	34826-9162
34824-0204	NO	20	A	BLACK		34897-8200	34897-9200	34825-0200	34825-9200	34826-0200	34826-9200
34824-0205	NO	20	B	GRAY		34897-8201	34897-9201	34825-0201	34825-9201	34826-0201	34826-9201
34824-0206	NO	20	C	DARK GRAY		34897-8202	34897-9202	34825-0202	34825-9202	34826-0202	34826-9202
34824-1204	YES	20	A	BLACK		34897-8200	34897-9200	34825-0200	34825-9200	34826-0200	34826-9200
34824-1205	YES	20	B	GRAY		34897-8201	34897-9201	34825-0201	34825-9201	34826-0201	34826-9201
34824-1206	YES	20	C	DARK GRAY		34897-8202	34897-9202	34825-0202	34825-9202	34826-0202	34826-9202
34824-0244	NO	24	A	BLACK		34897-8240	34897-9240	34825-0240	34825-9240	34826-0240	34826-9240
34824-0245	NO	24	B	GRAY		34897-8241	34897-9241	34825-0241	34825-9241	34826-0241	34826-9241
34824-0246	NO	24	C	DARK GRAY		34897-8242	34897-9242	34825-0242	34825-9242	34826-0242	34826-9242
34824-1244	YES	24	A	BLACK		34897-8240	34897-9240	34825-0240	34825-9240	34826-0240	34826-9240
34824-1245	YES	24	B	GRAY		34897-8241	34897-9241	34825-0241	34825-9241	34826-0241	34826-9241
34824-1246	YES	24	C	DARK GRAY		34897-8242	34897-9242	34825-0242	34825-9242	34826-0242	34826-9242


FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
F A = 0 F C = 0 F P = 0 DIVISIONAL SYMBOLS		DIMENSION UNITS	SCALE	CURRENT REV DESC:			molex				
		MM	6:1								
		GENERAL TOLERANCES (UNLESS SPECIFIED)									
		ANGULAR TOL ± 0.5°					MINI50 DUAL ROW RECEPTACLE SALES DWG				
		4 PLACES	±								
		3 PLACES	±								
		2 PLACES	± 0.100								
1 PLACE	± 0.20	STATUS: Production DRWN: Yann Chen 2023-10-20 CHK'D: Gang Li 2023-10-25 APPR: Colin Zhang 2023-10-30			PRODUCT SALES DRAWING						
0 PLACES	±				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER				
			E-SIZE	34824	SD-34824-002	PSD	001	L9			
					GENERAL MARKET		3 OF 3				

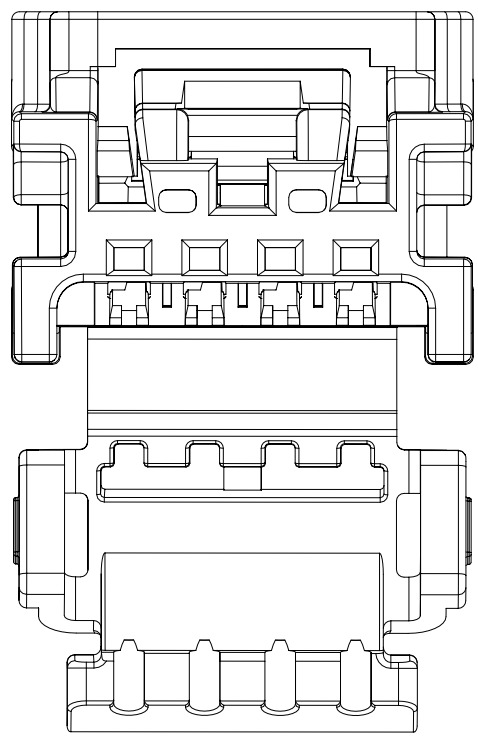


4CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION A

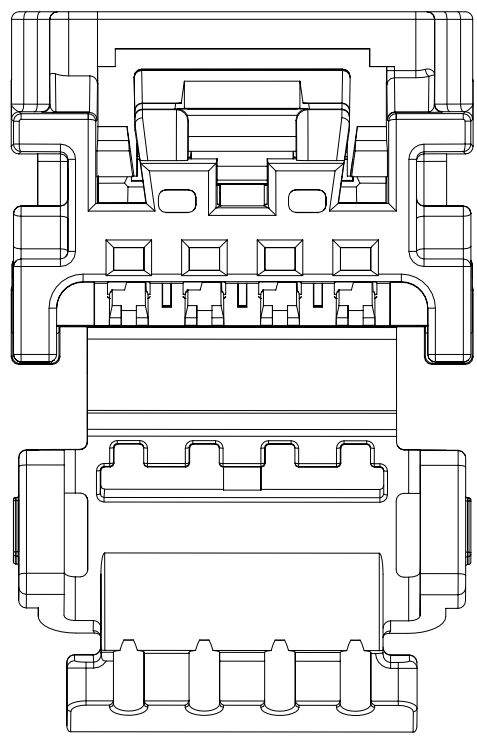


4CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION B

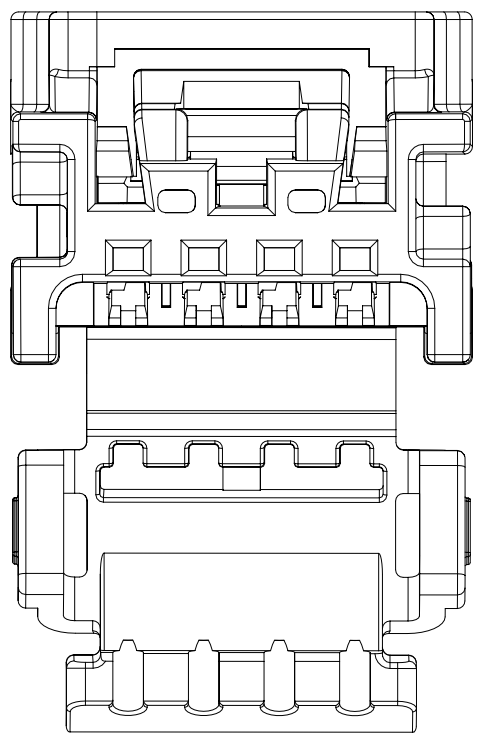


4CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION C

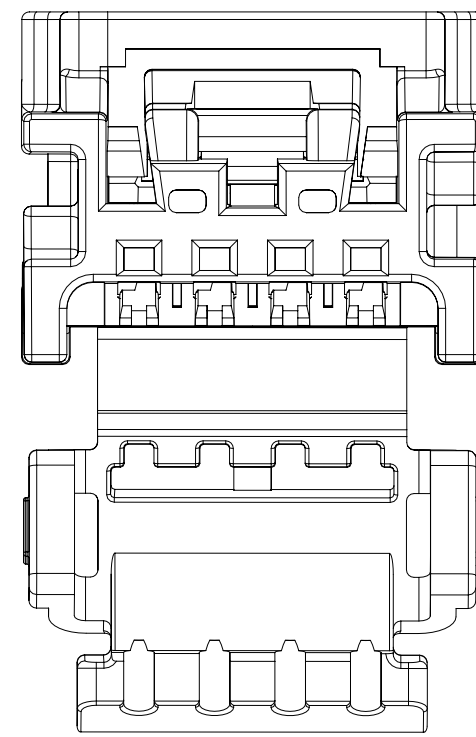


4CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION D

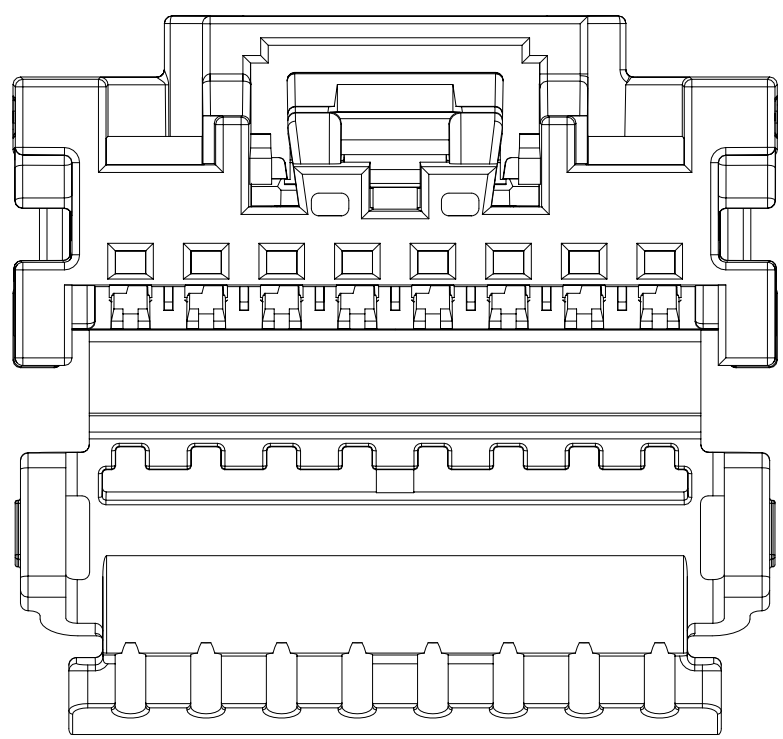


8CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION A

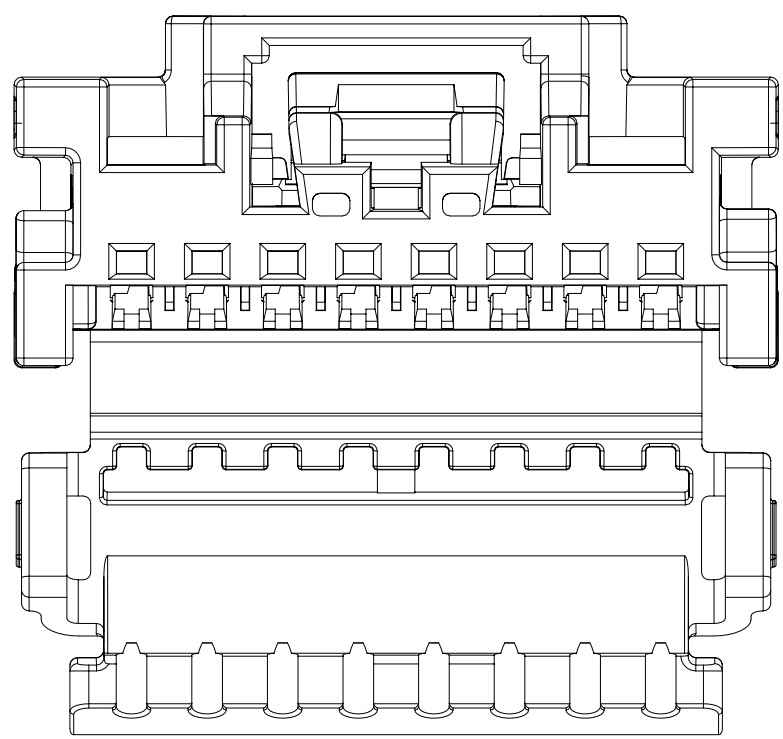


8CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION B

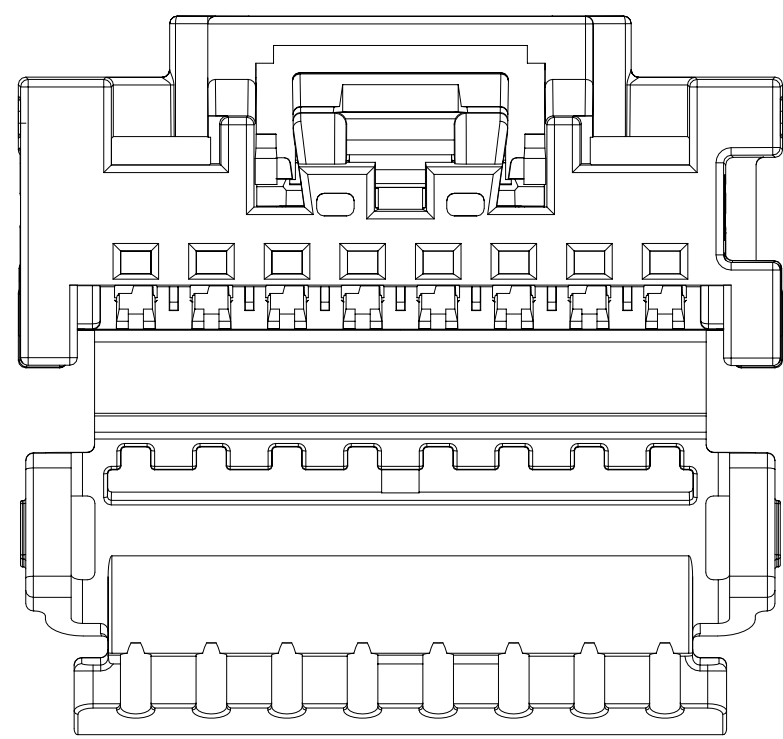


8CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION C

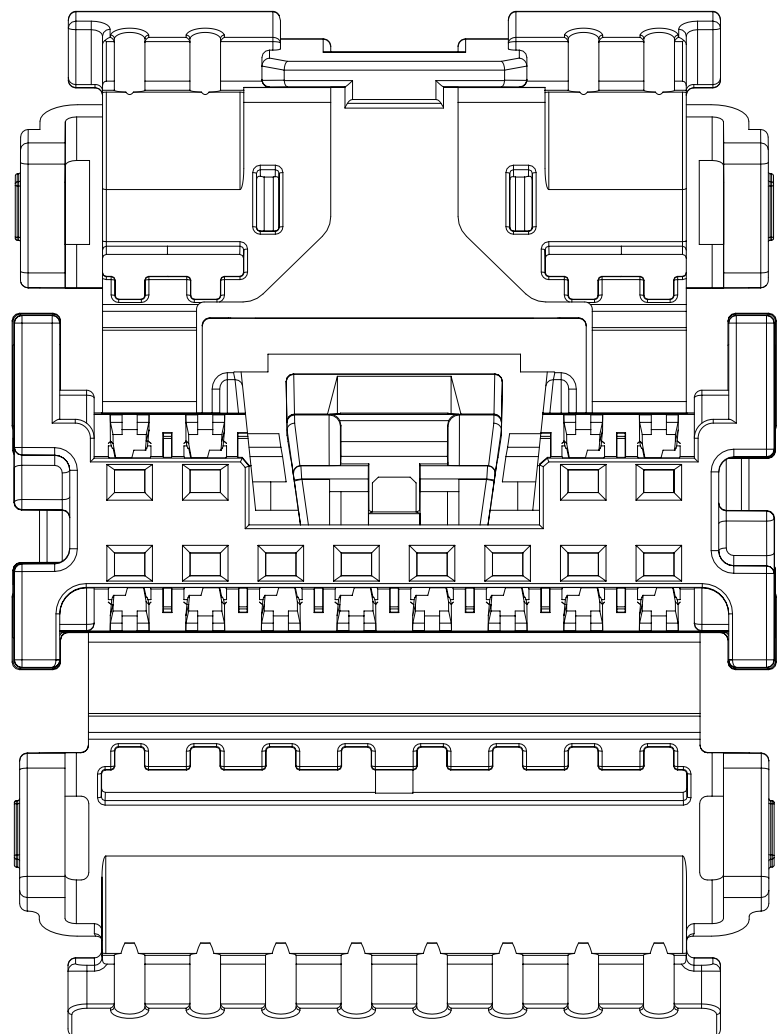


12CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION A

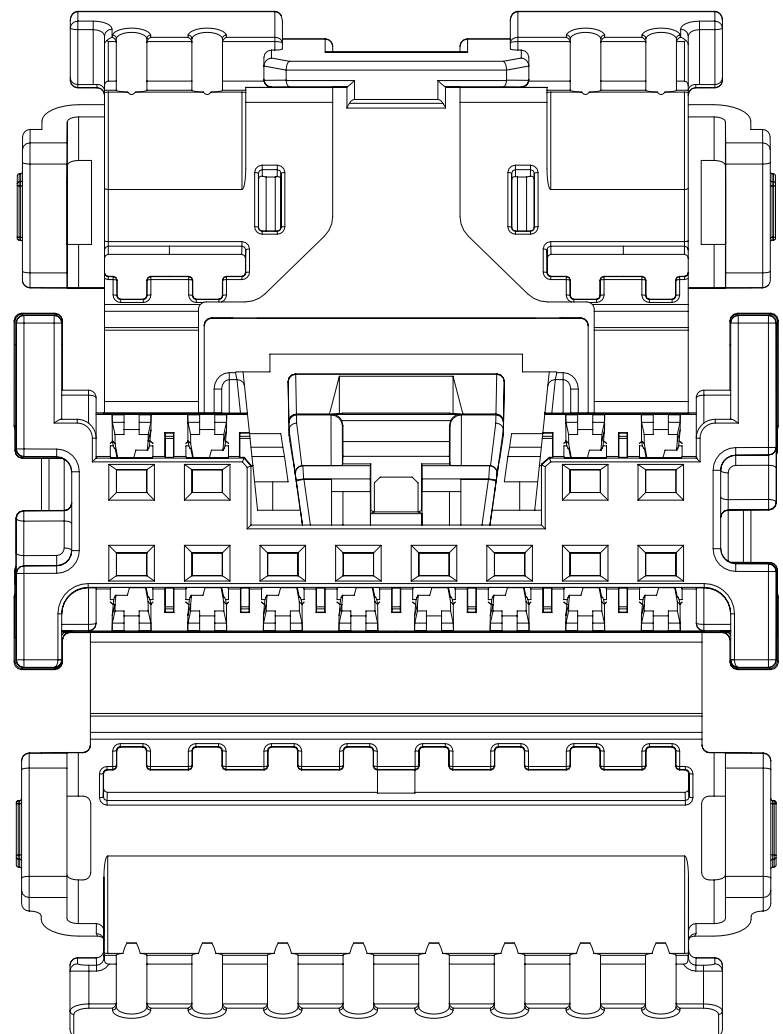


12CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION B

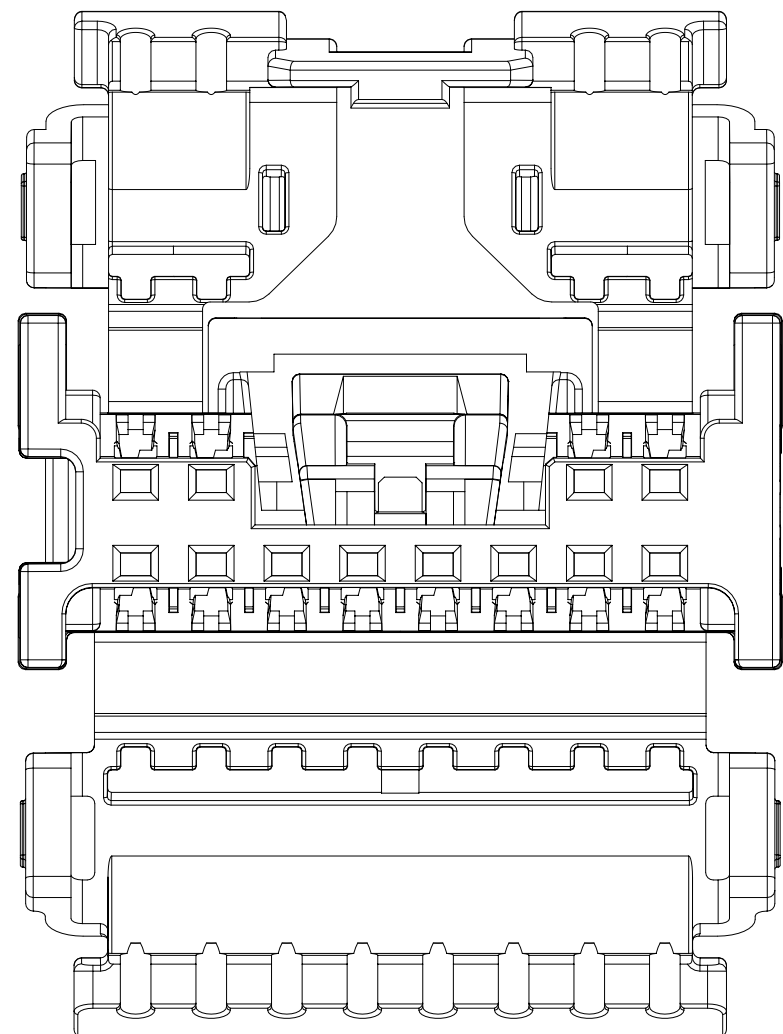


12CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION C

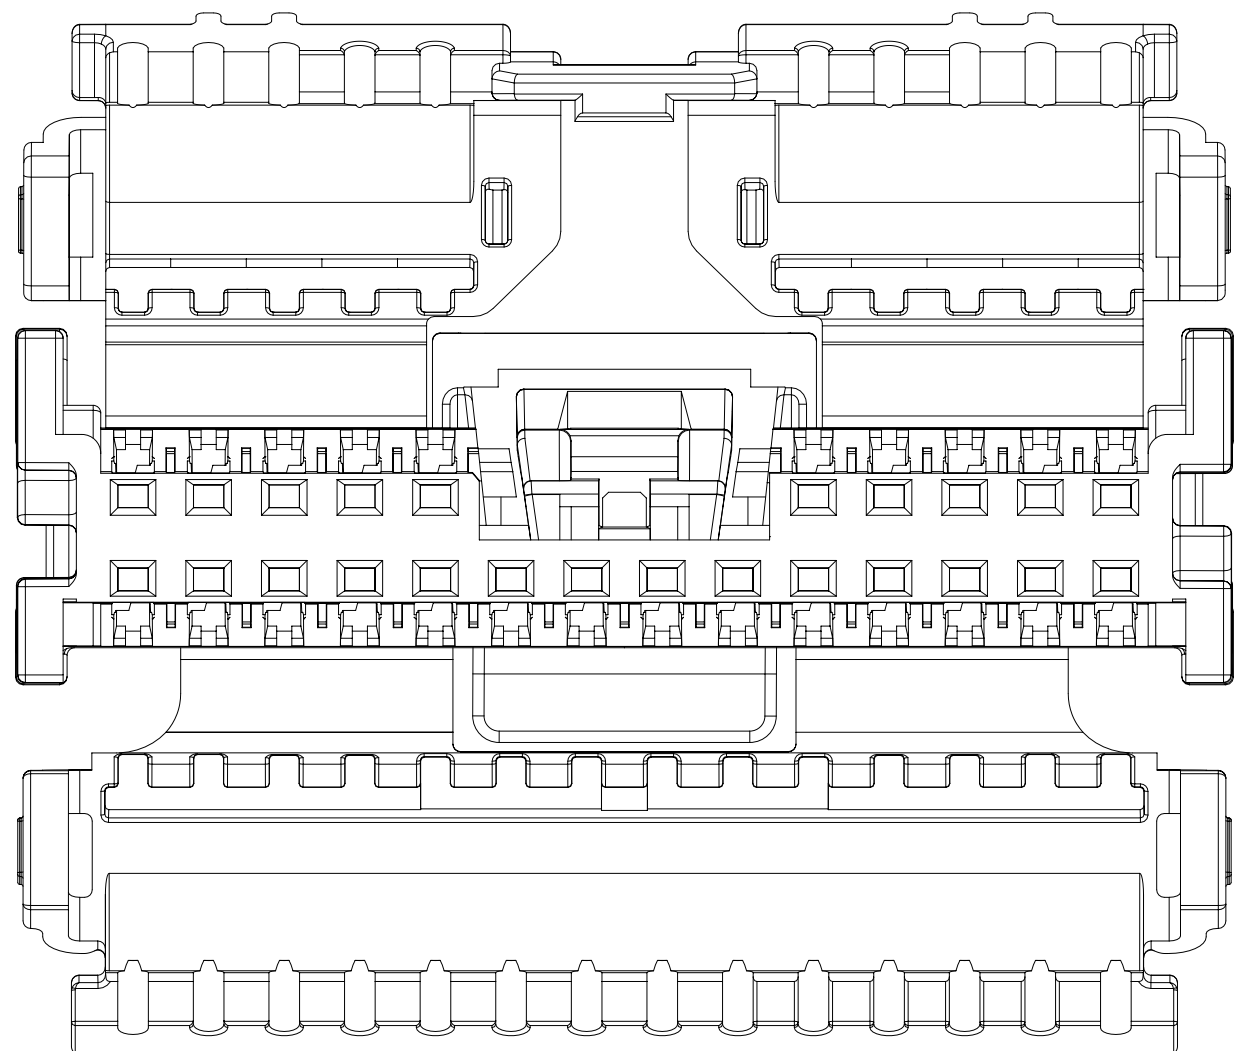

24CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION A

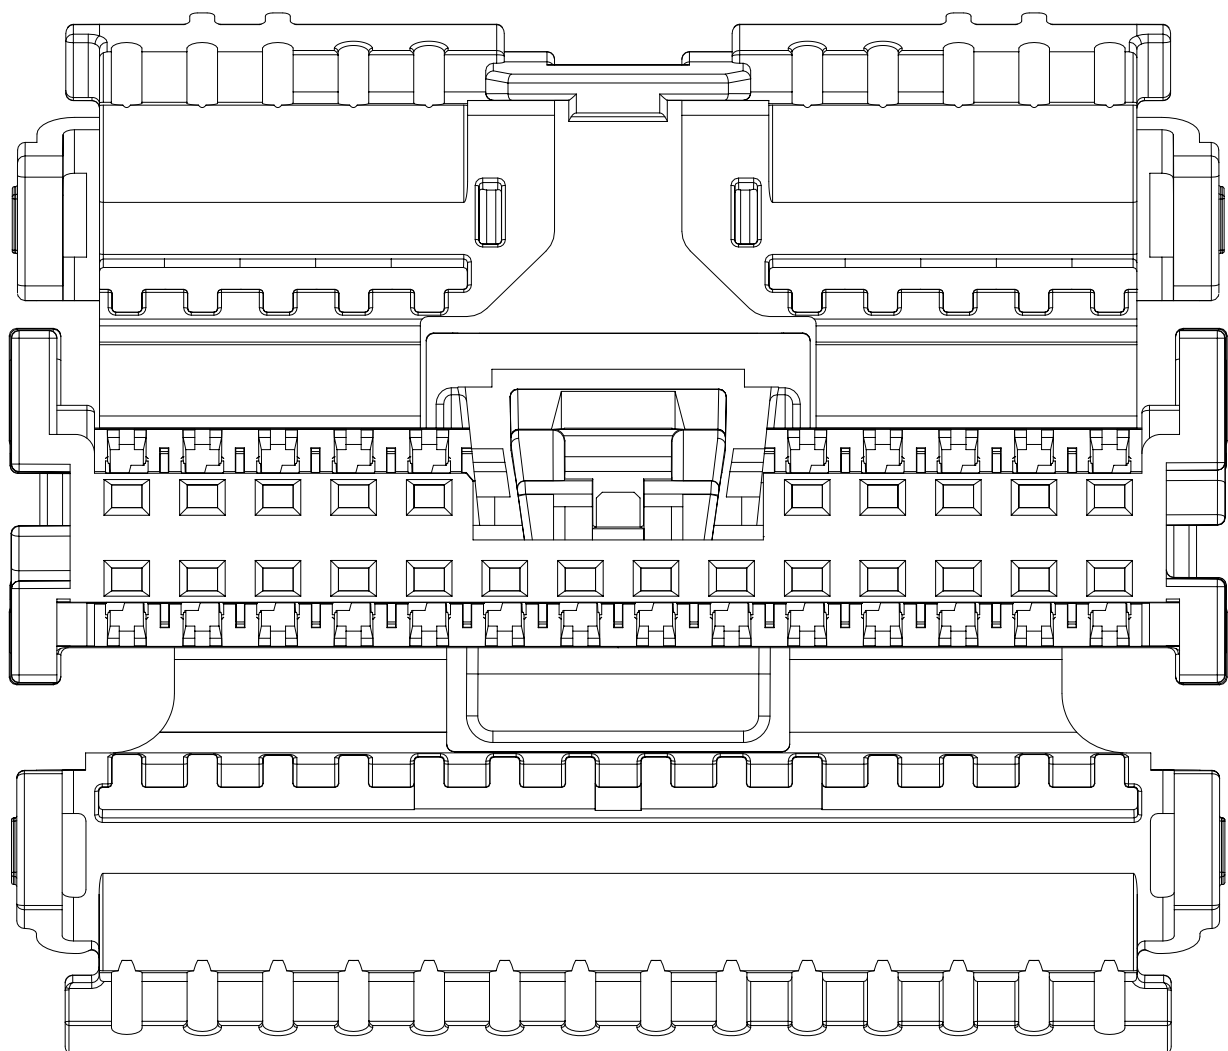

24CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION B

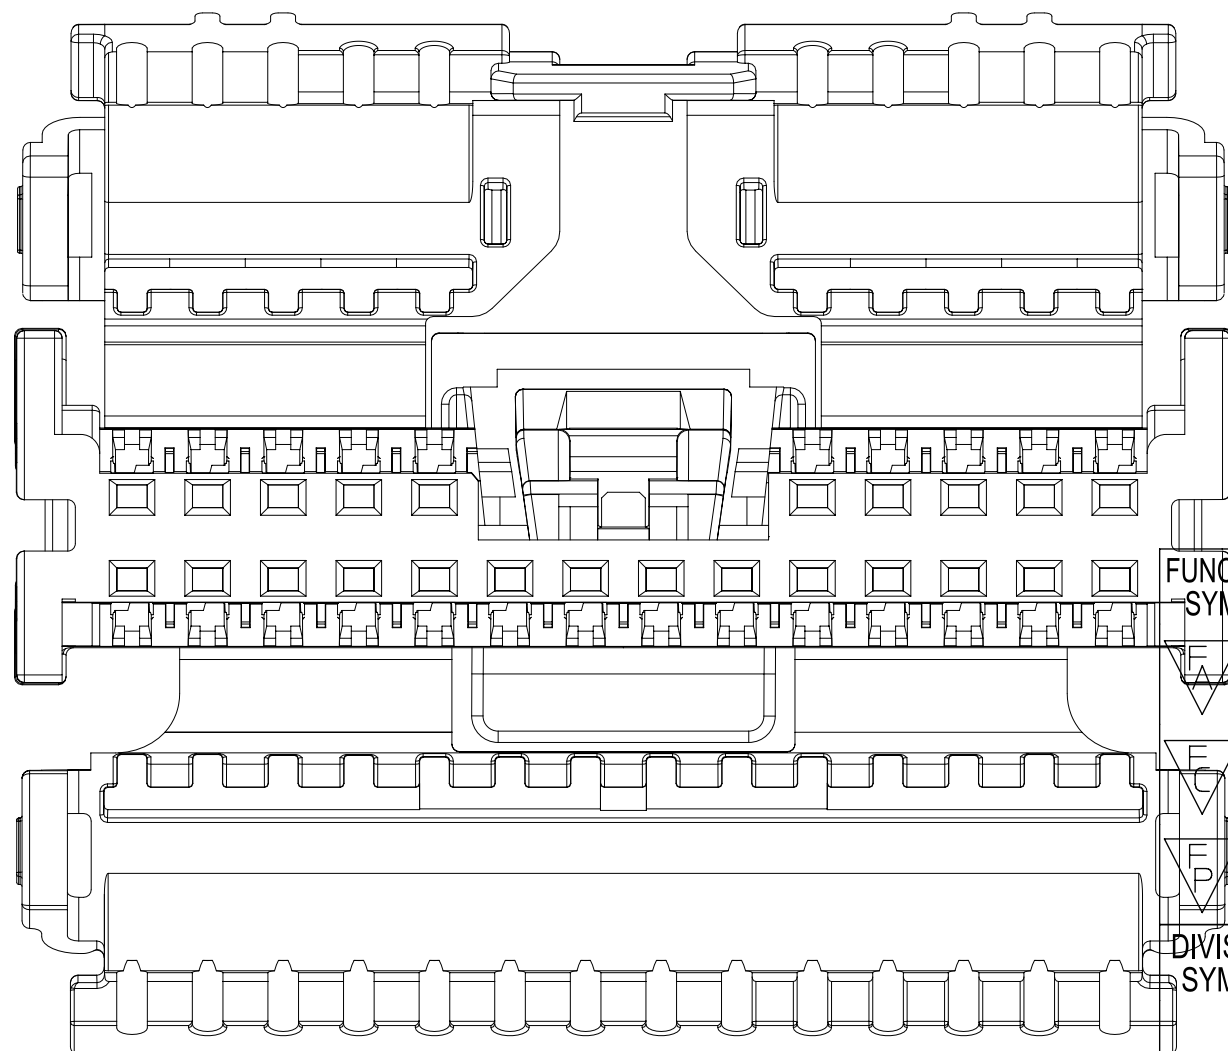

24CKT BRIDGED RECEPTACLE WITH CPA
POLARIZATION OPTION C

24CKT POLARIZATIONS ARE REPRESENTATIVE OF 16CKT AND 20CKT

NOTES: VALID UNLESS OTHERWISE SPECIFIED

1. GENERAL:

- a. APPLICATION SPECIFICATION SEE: AS-34791-020
b. PRODUCT SPECIFICATION SEE: PS-34791-020
c. PACKAGING SPECIFICATION PER MOLEX DRAWING: SEE CHART
d. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: QEHS-699000-301
e. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
f. FLAMMABILITY REQUIREMENT: PER ISO3795 OR GM3191
1. BURN RATE 100 mm/MIN MAXIMUM
2. MATERIAL MUST BE SELF EXTINGUISHING
g. VISUAL DEFECTS SHALL MEET COSMETIC STANDARD PS-45499-002 (Class B)
h. FOR TERMINAL USAGE, REFER TO MOLEX SALES DRAWING SD-560023-002 (PLAN OBSOLESCENCE IN 2024) AND 5600230800.

2. DESIGN - MATERIALS:


- a. SEE BOM FOR MATERIAL INFORMATION

3. DESIGN - GEOMETRY:

- a. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.
b. GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5 - 2009
c. GENERAL TOLERANCES:
LINEAR: REFER TO DRAWING FRAME
ANGULAR: $\pm 3^\circ$
d. EDGES AND UNDIMENSIONED DETAILS PER ISO13715
e. CORNERS SHOWN AS SHARP TO BE R 0.2 MAX
f. LETTERING SHALL BE 0.1 MAX RAISED IN 0.15 MAX RECESS PAD AND NOT PROTRUDE THE SURFACE. THIS INCLUDES RECYCLING CODE,
PLANT ID, CAVITY ID, VENDOR ID, CIRCUIT ID, AND PART SERIES NUMBER.
g. DIMENSION APPLIES ONLY TO RECEPTACLES WITH LOCK BRIDGE OPTION.

4. DESIGN - FUNCTIONALITY:

- a. HINGE DOES NOT AFFECT FUNCTION OF THE PART.

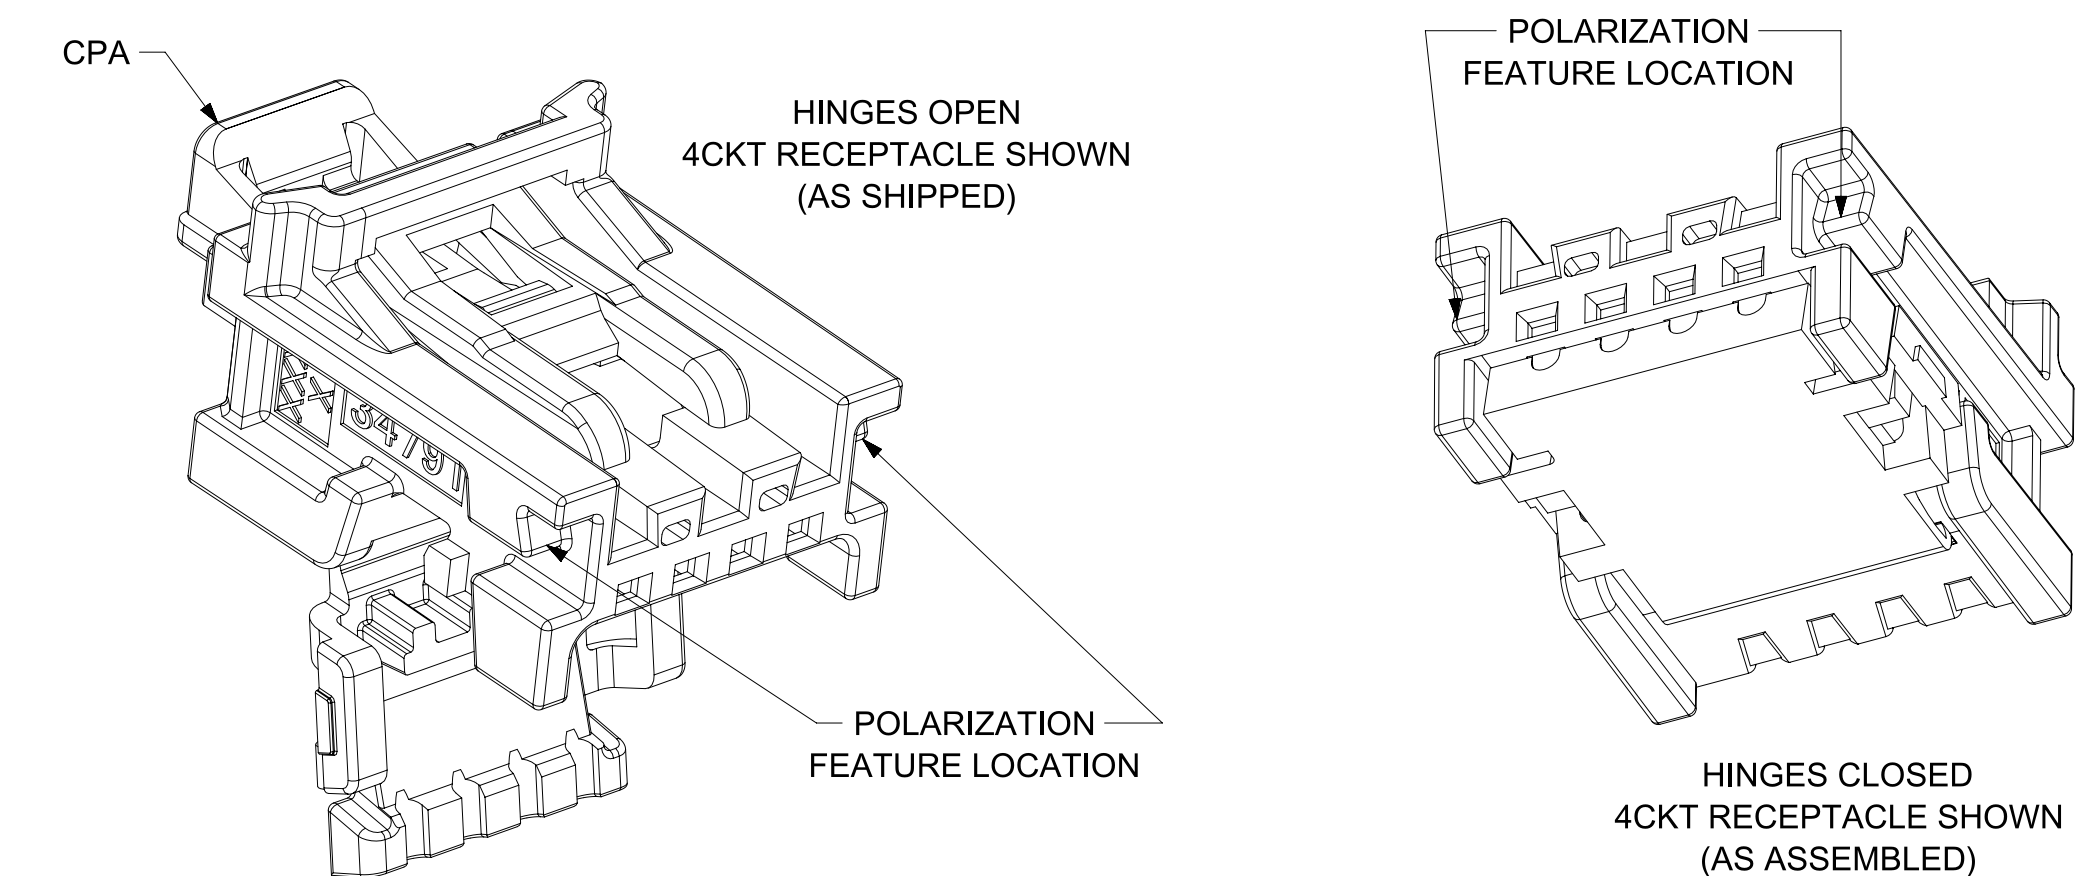

INSPECTION BALLOON LOG
PER DRAWING REVISION: M16

LAST BALLOON USED: 21

ADDED BALLOON NUMBERS:

REMOVED BALLOON NUMBERS:

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

SCALE

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL

4 PLACES

3 PLACES

2 PLACES

1 PLACE

0 PLACES

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

STATUS: Production

DRWN: Yann Chen

CHK'D: Gang Li

APPR: Colin Zhang

CURRENT REV DESC:

2023-10-20

2023-10-25

2023-10-30

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

GENERAL MARKET

1 OF 4

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240


241

242


243

244</




4CKT BRIDGE OPTION WITH CPA IN PRE-LOCK

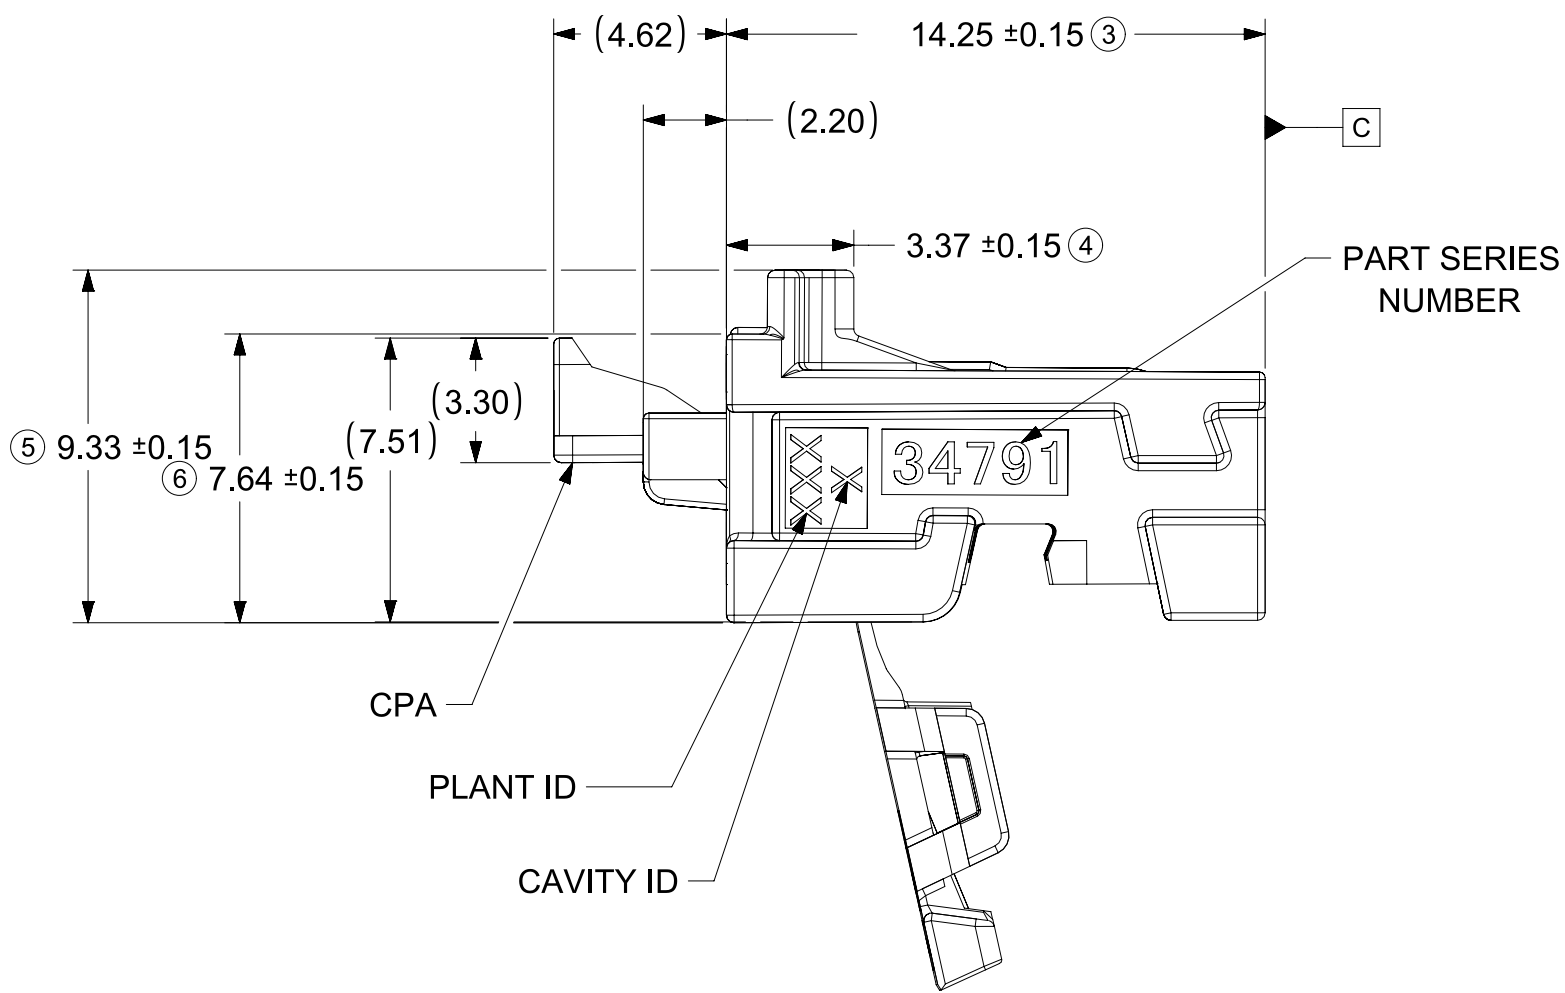




4CKT USCAR
COMPATIBLE
RECEPTACLE WITH CPA

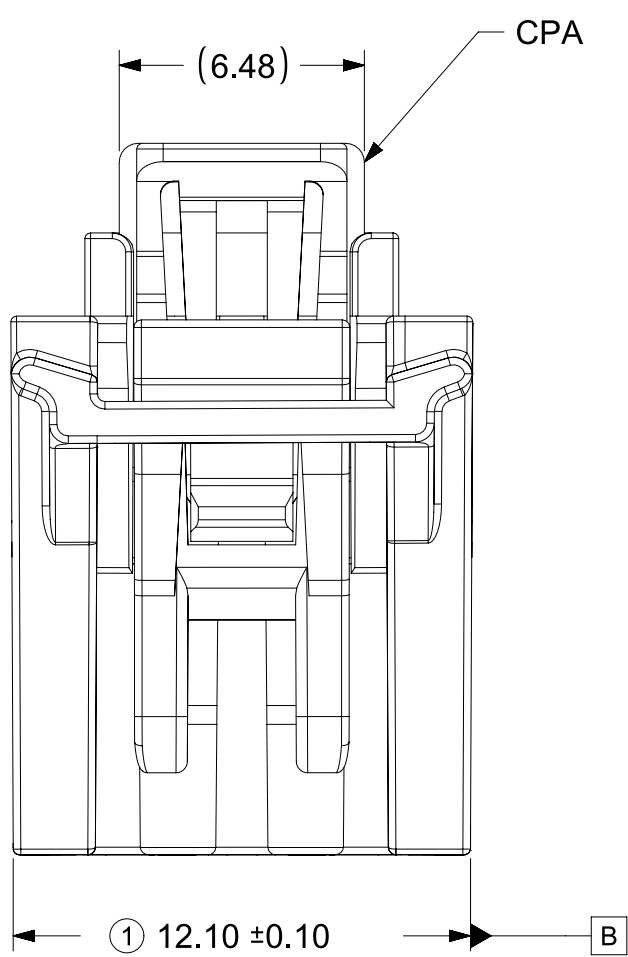


8CKT USCAR
COMPATIBLE
RECEPTACLE WITH CPA

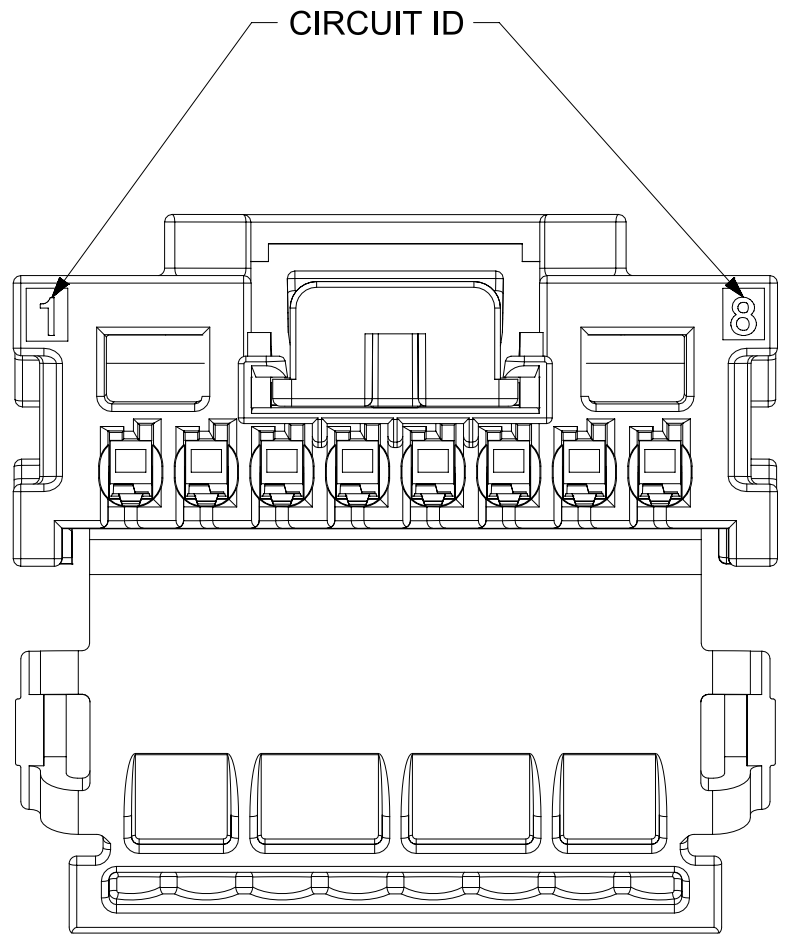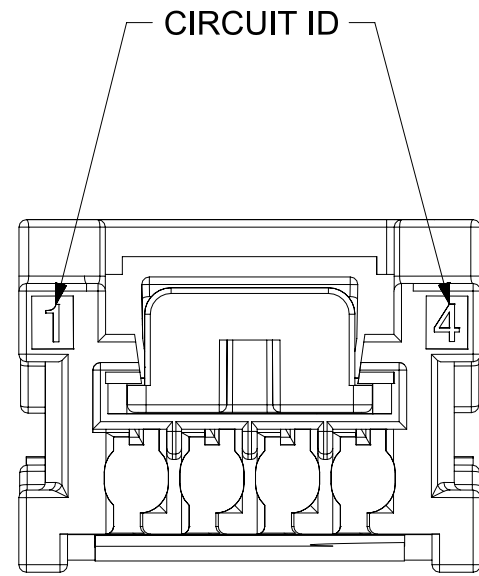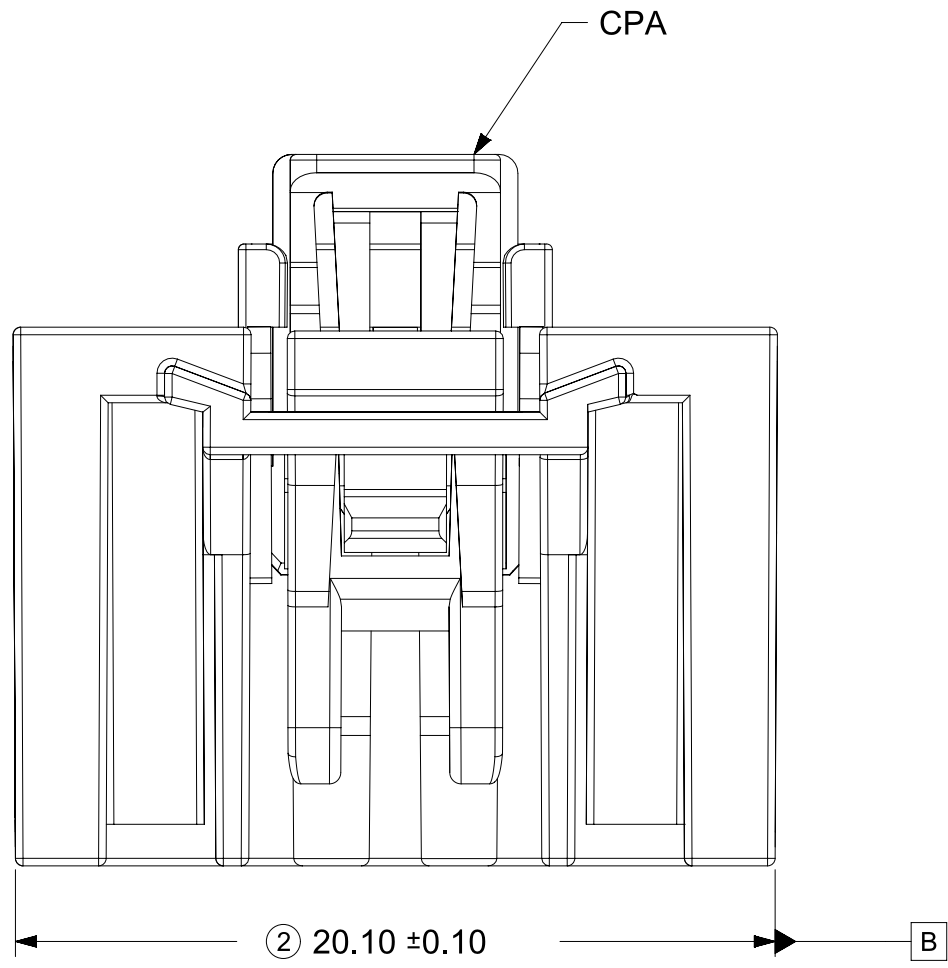


8CKT BRIDGE OPTION WITH CPA IN PRE-LOCK

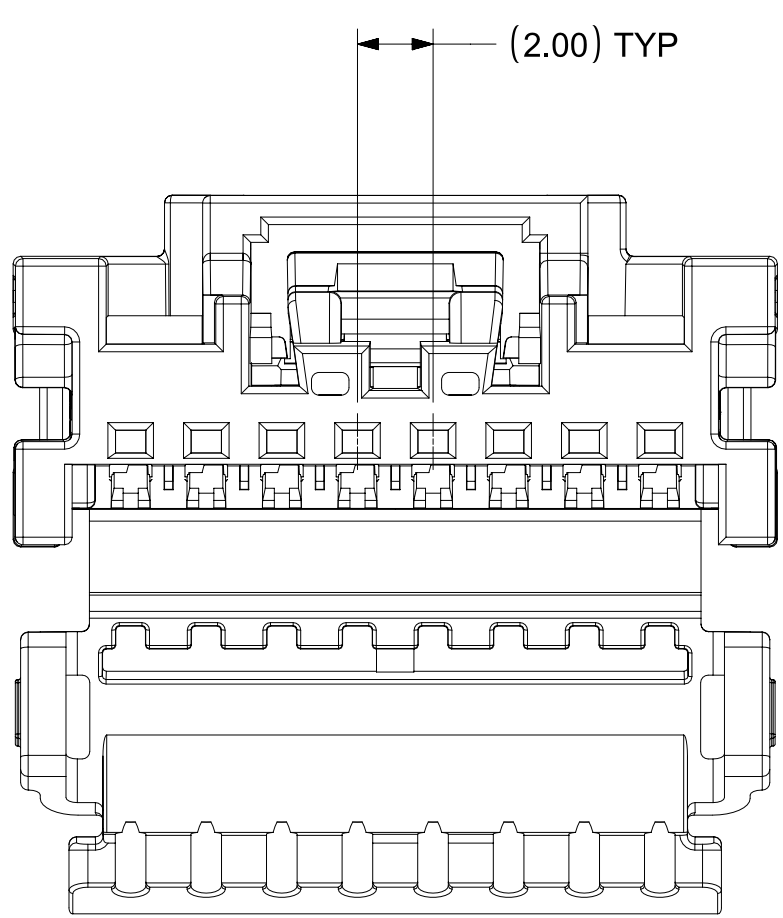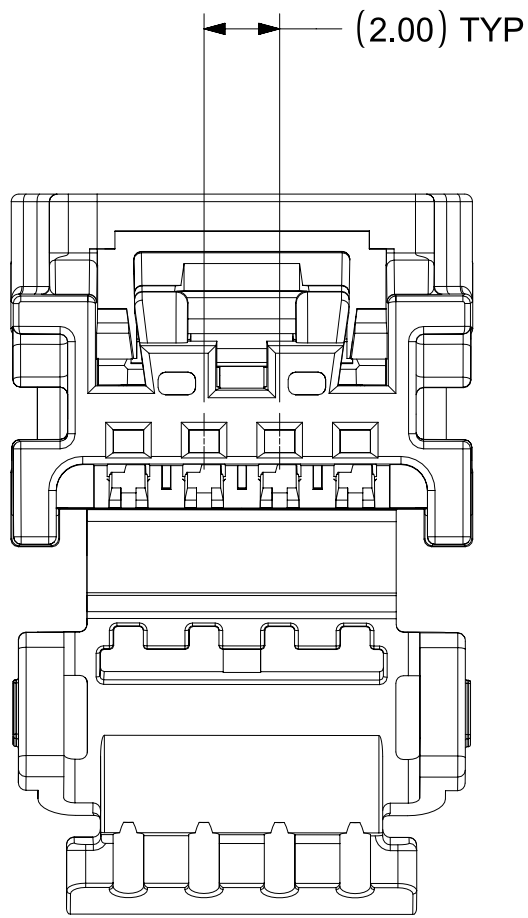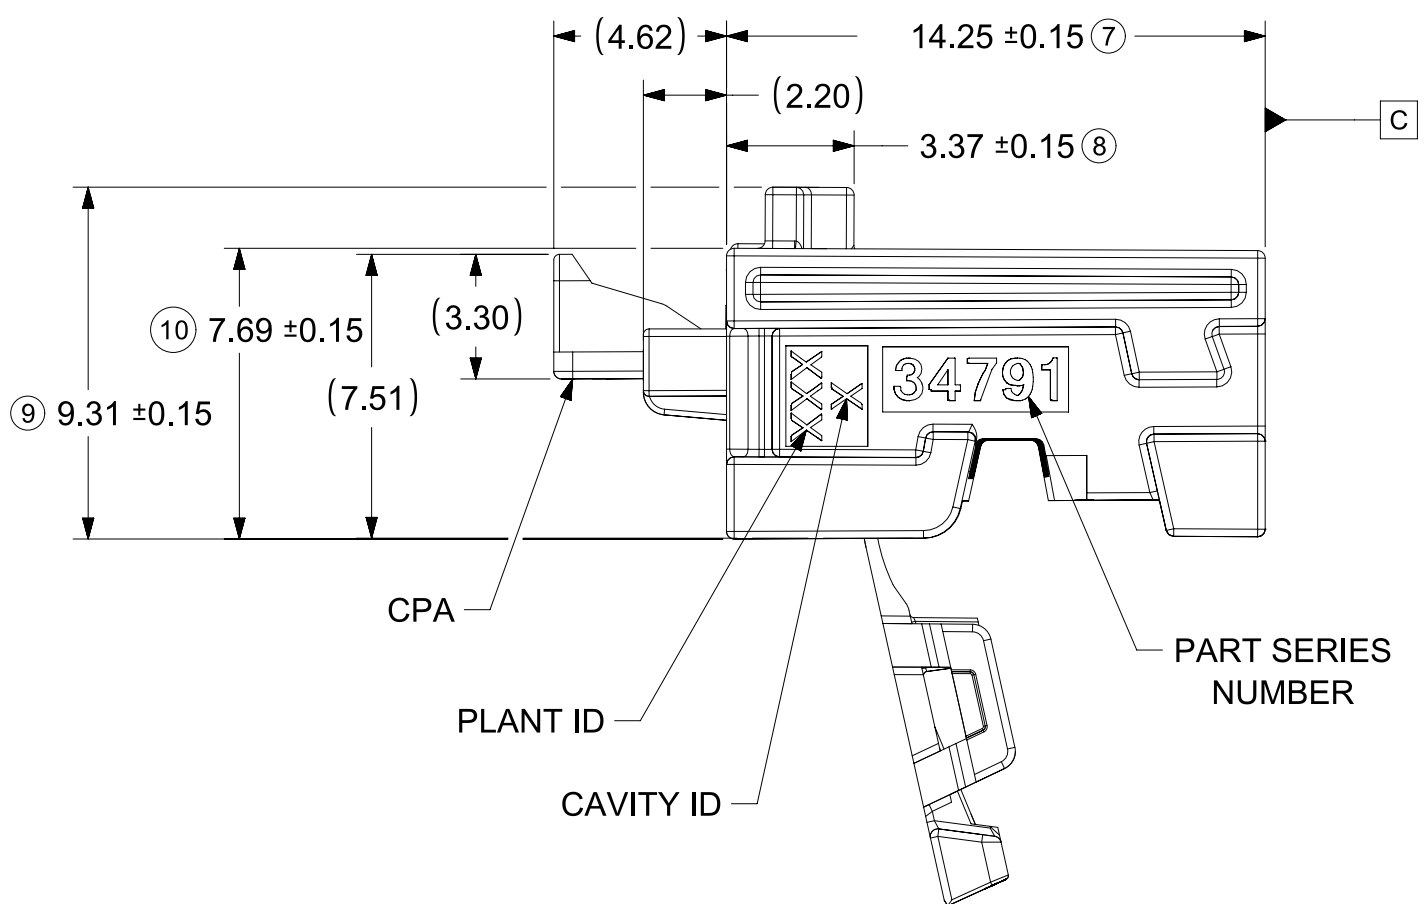




4CKT HINGE CLOSED
CPA IN FINAL POSITION

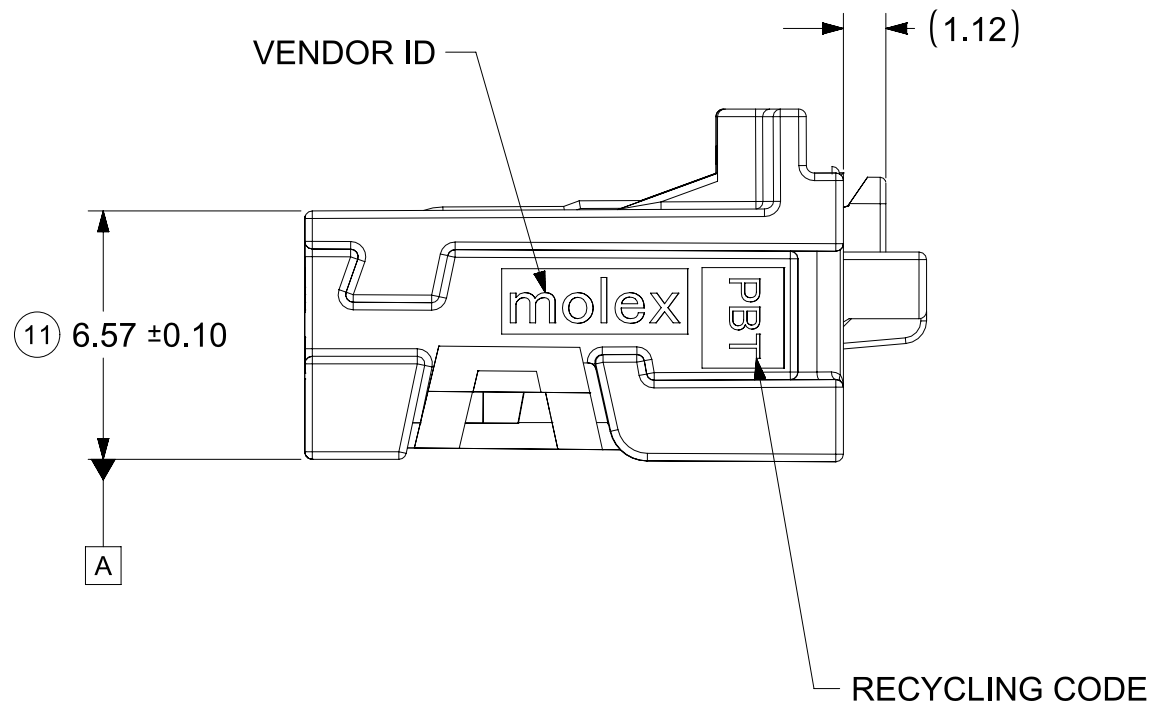

8CKT HINGE CLOSED
CPA IN FINAL POSITION

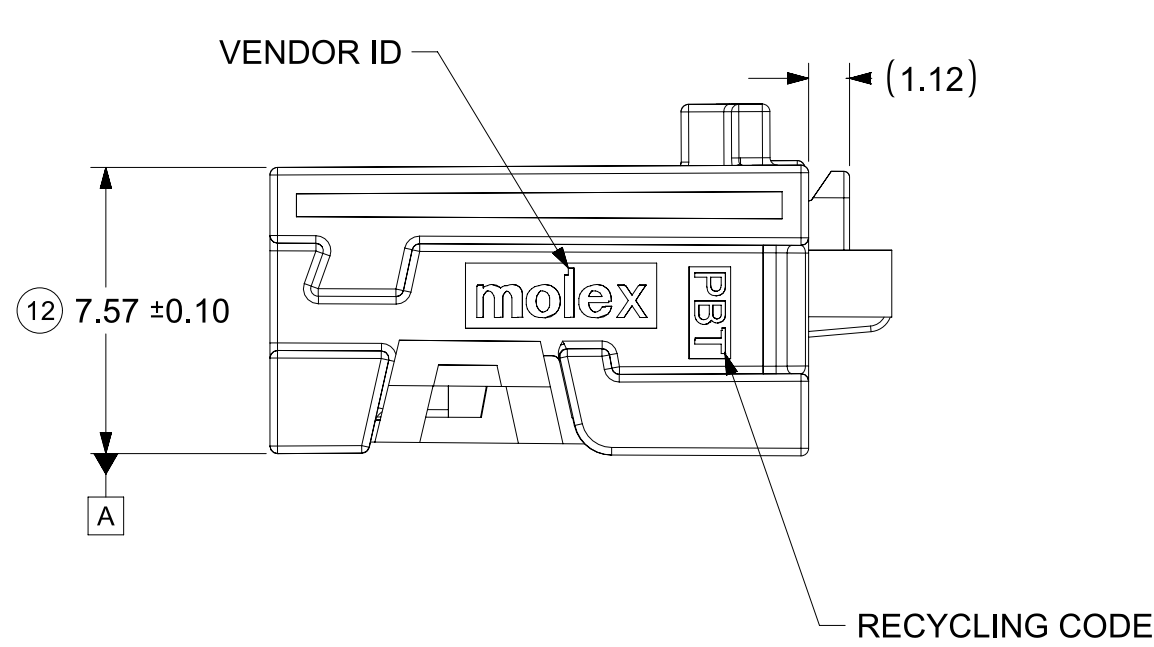


4CKT HINGE CLOSED

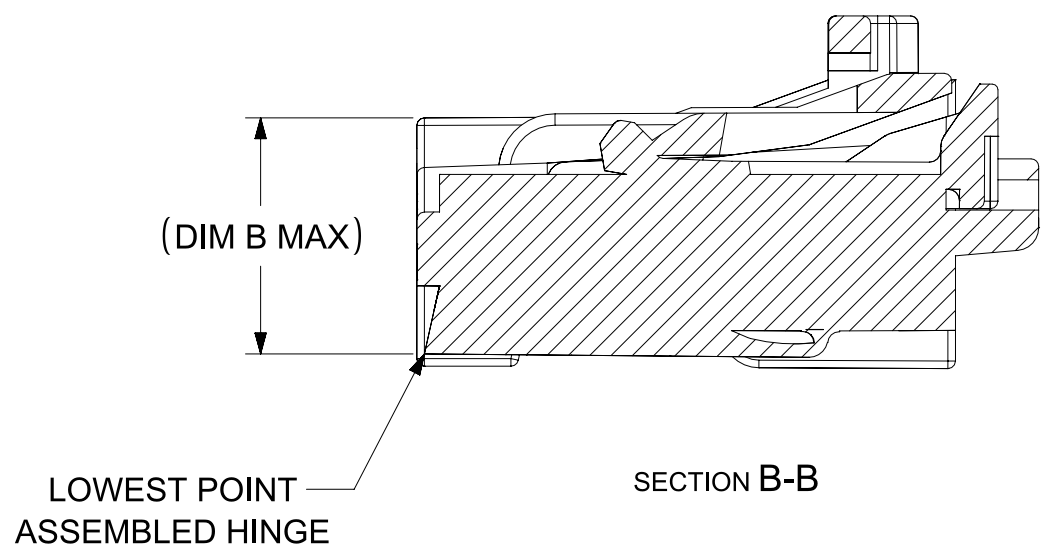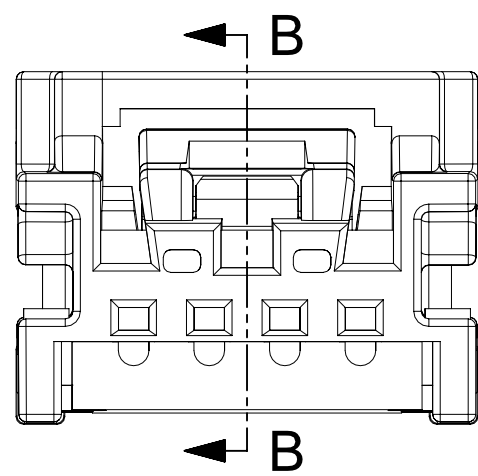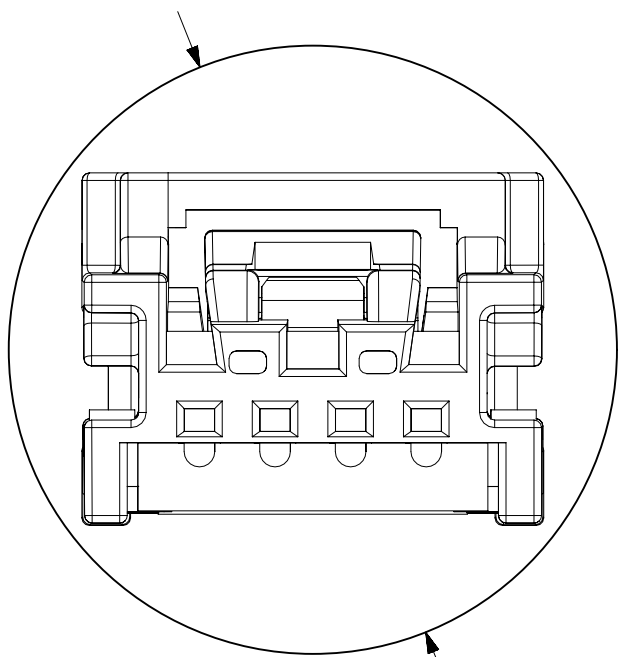



CHARTED DIMENSIONS		
DESCRIPTION	DIMENSION	
	A	B
4 CKT	16.09	6.77
8 CKT	22.52	7.77
12 CKT	23.18	8.47
16 CKT	26.87	8.47
20 CKT	30.65	8.47
24 CKT	34.47	8.47

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FD = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS		SCALE		CURRENT REV DESC:											
	MM		5:1													
	GENERAL TOLERANCES (UNLESS SPECIFIED)				molex MINI50 RECEPTACLE WITH CPA SALES DRAWING PRODUCT SALES DRAWING											
	ANGULAR TOL ± 1°															
	4 PLACES		±													
	3 PLACES		±													
	2 PLACES		± 0.100													
	1 PLACE		± 0.20		STATUS: Production DRWN: Yann Chen CHK'D: Gang Li APPR: Colin Zhang		2023-10-20 2023-10-25 2023-10-30		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
	0 PLACES		±						SD-34824-003		PSD		001		M16	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
				A1-SIZE		34824				GENERAL MARKET		2 OF 4				

DUAL ROW LOCK BRIDGE OPTION


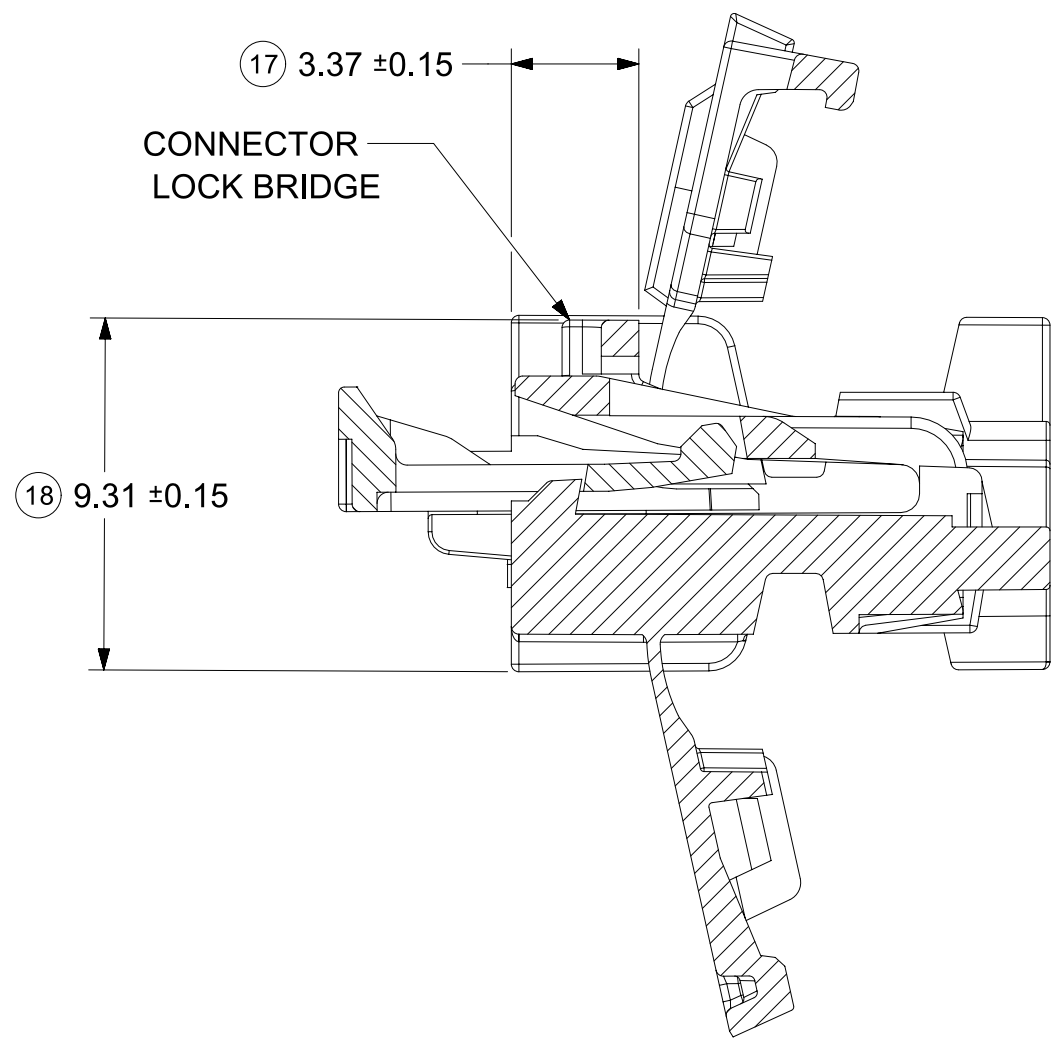


SECTION C-C

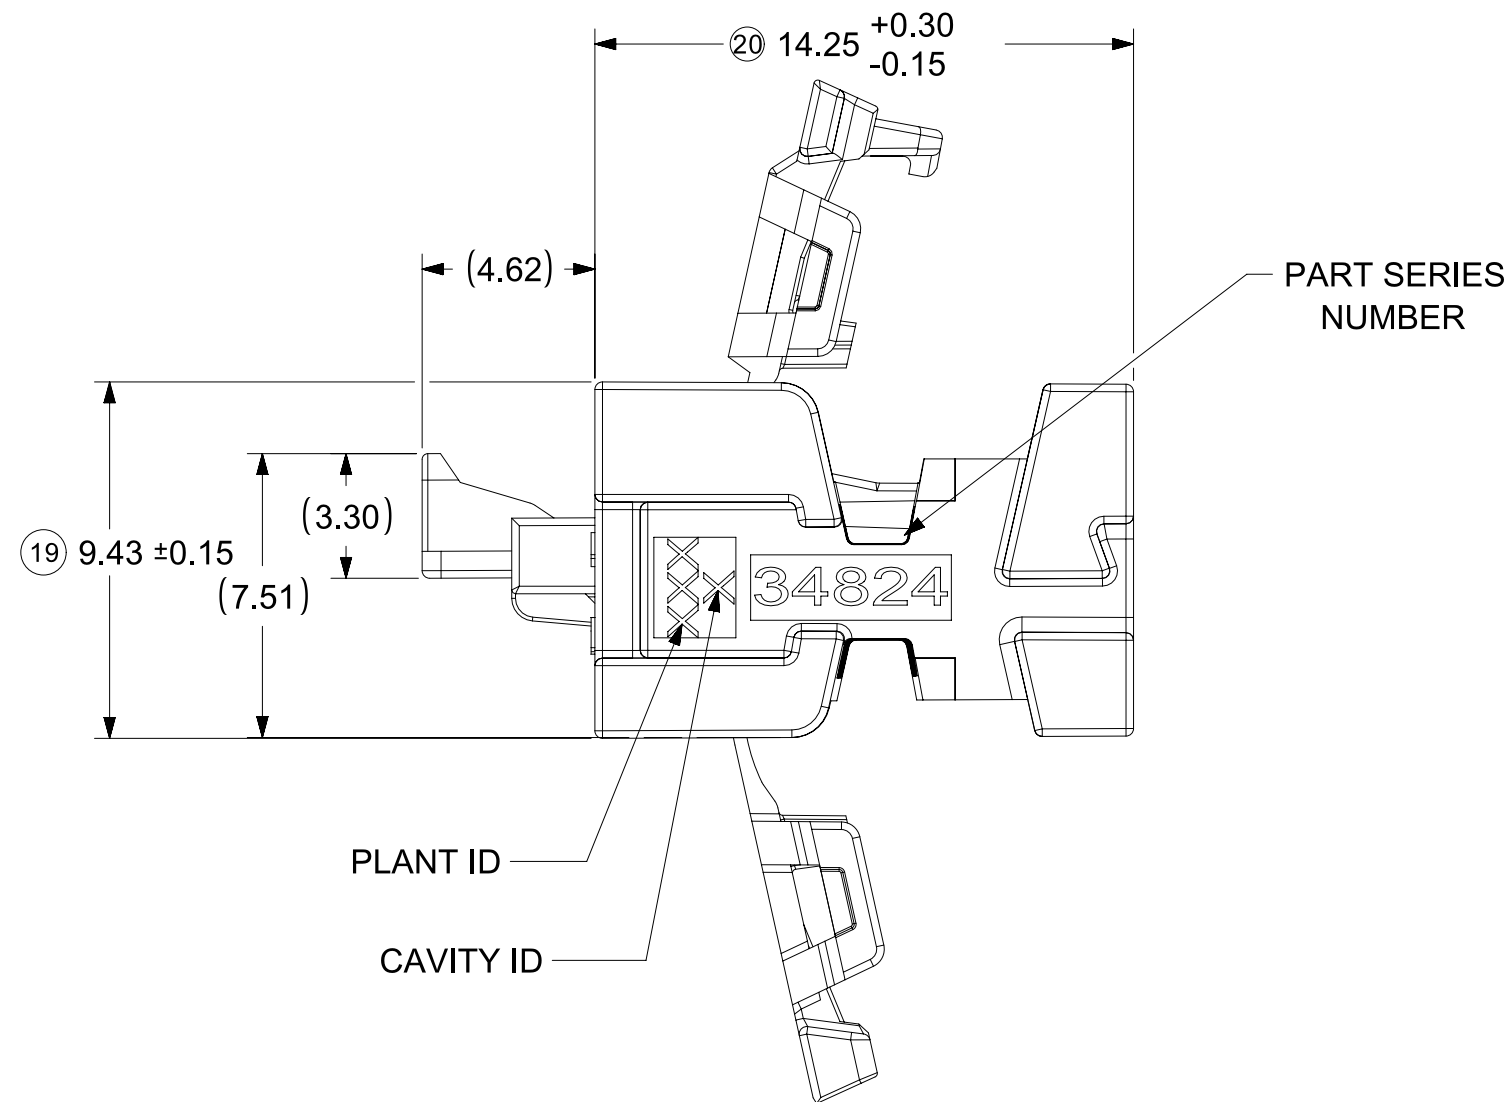
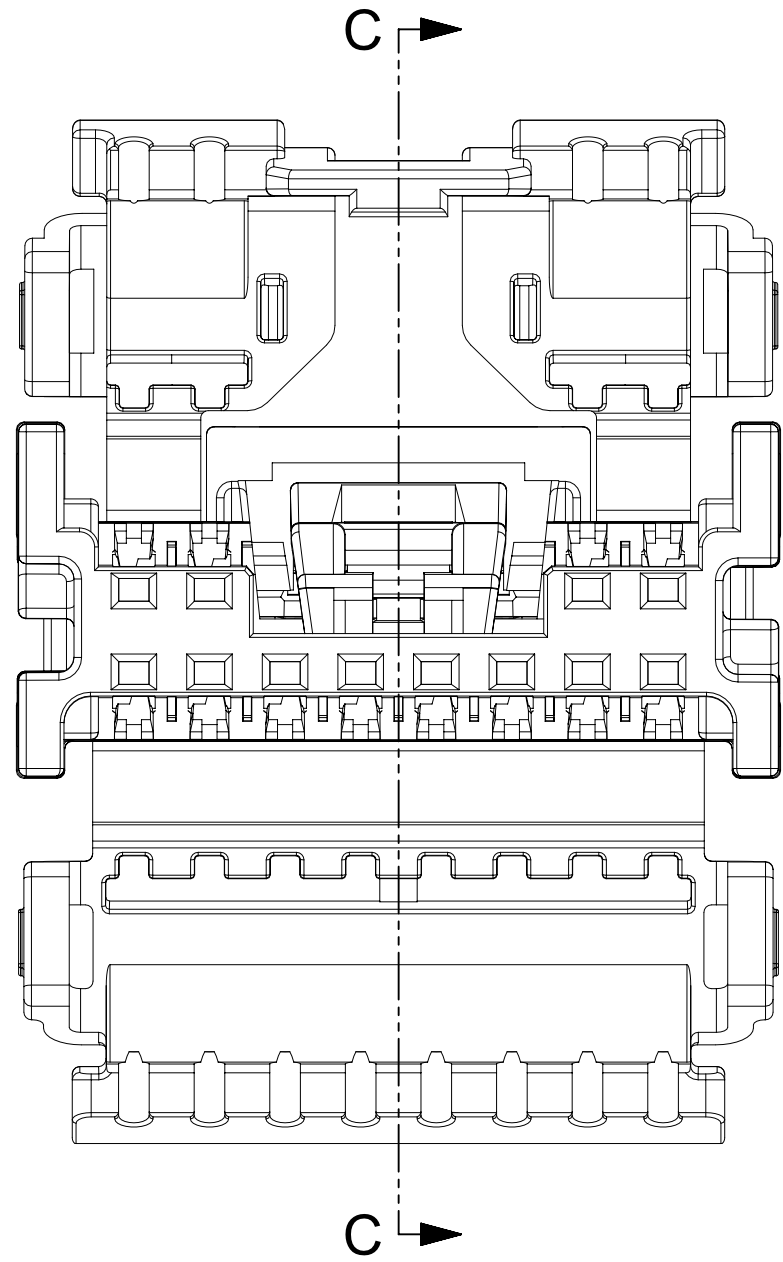


*NOTE: DIM 20 TOLERANCE IS +0.20/-0.15 FOR P/N 34824-2244/5/6


12CKT USCAR COMPATIBLE RECEPTACLE WITH CPA

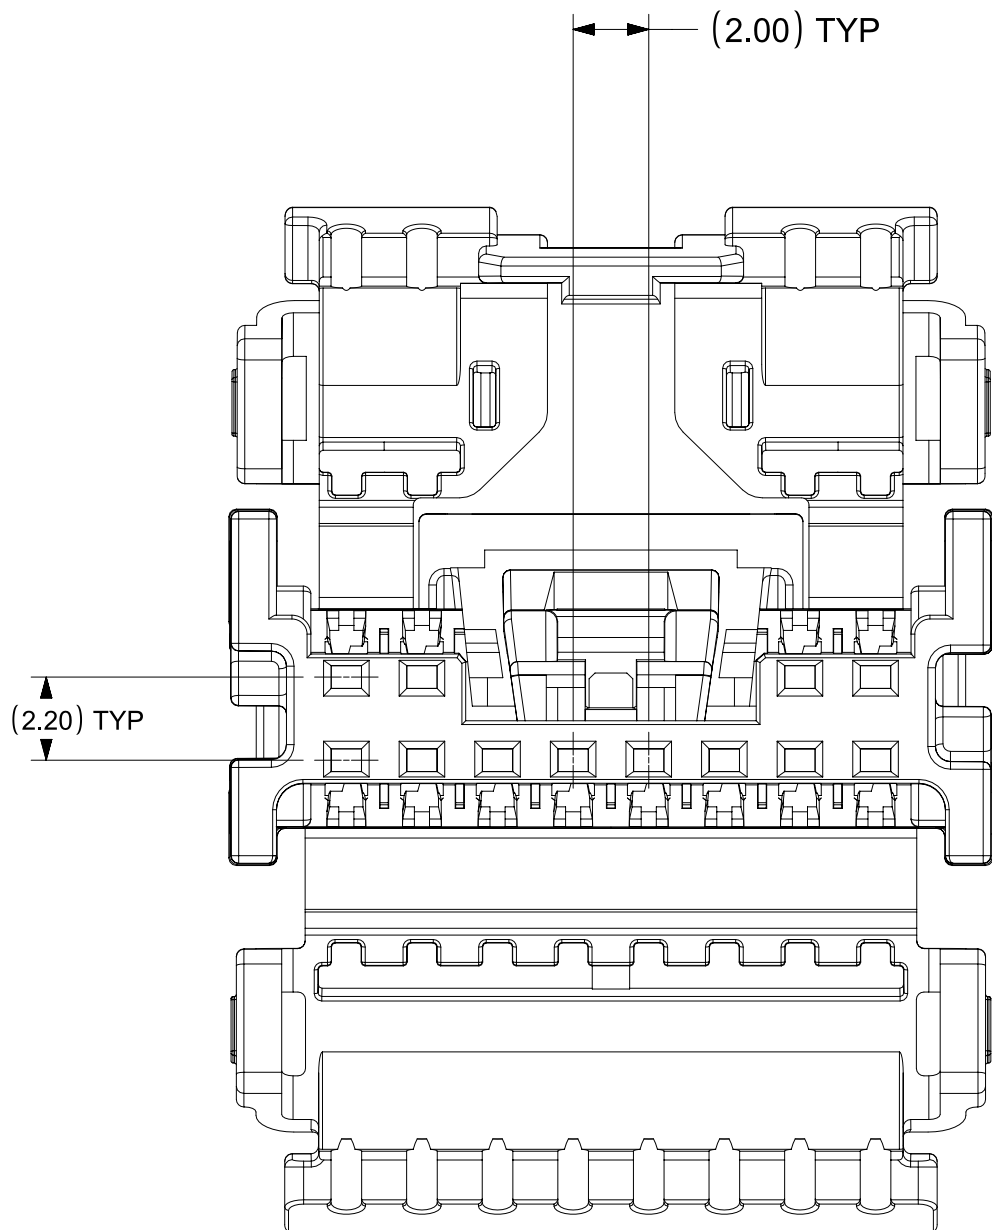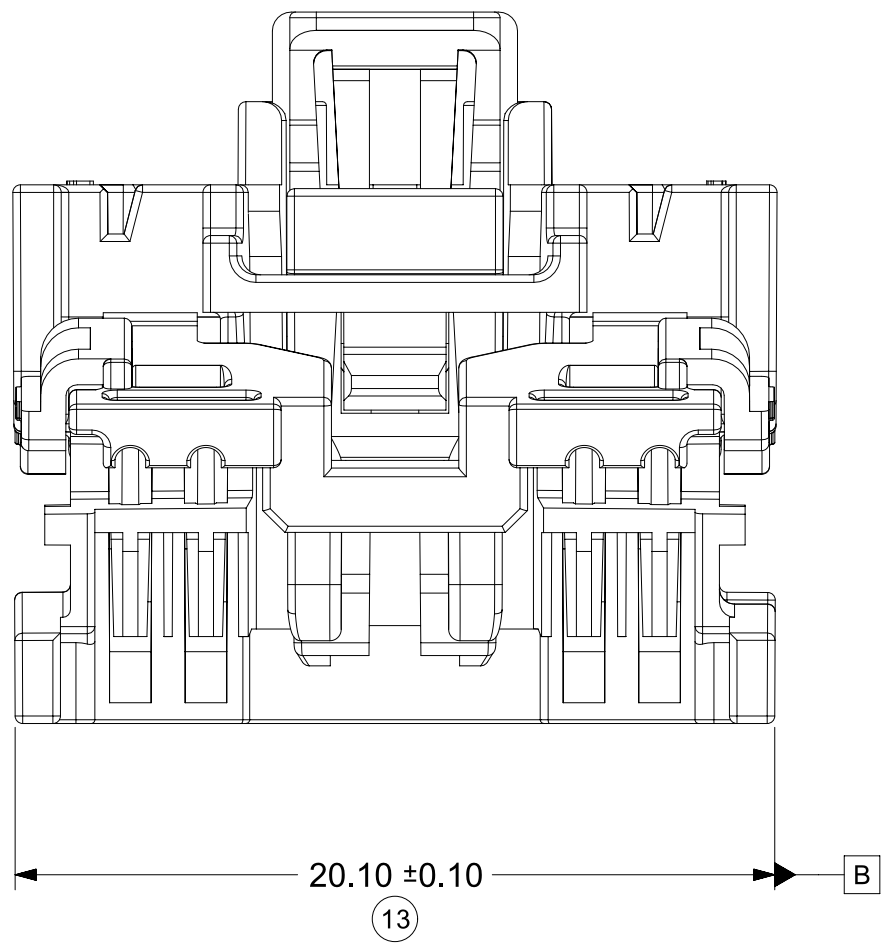

16CKT USCAR COMPATIBLE RECEPTACLE WITH CPA

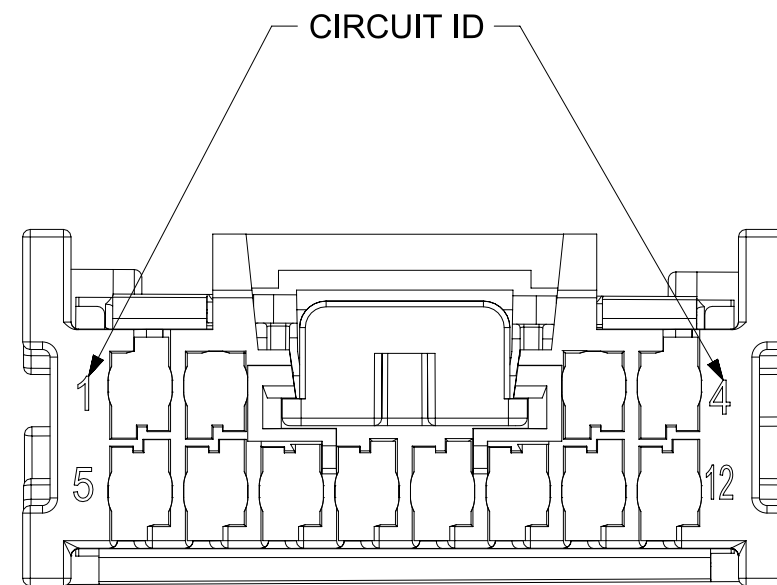
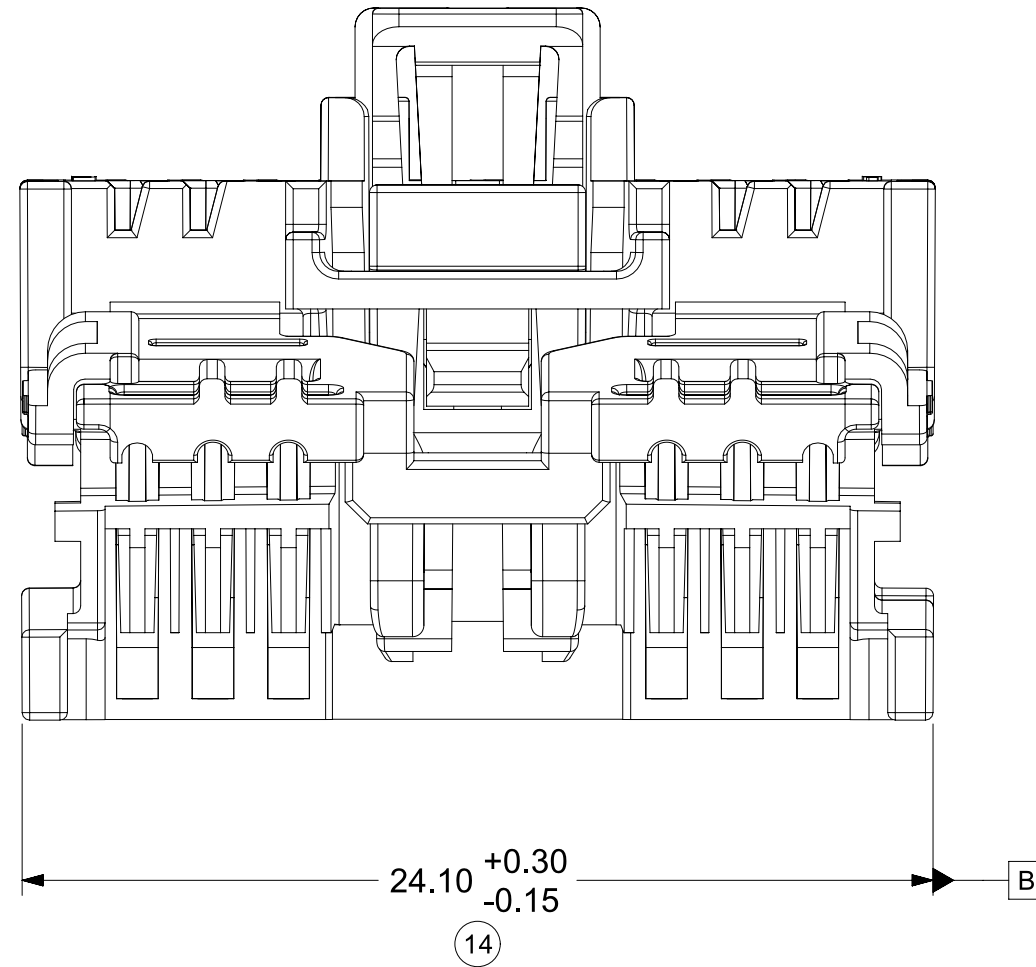


HINGES CLOSED

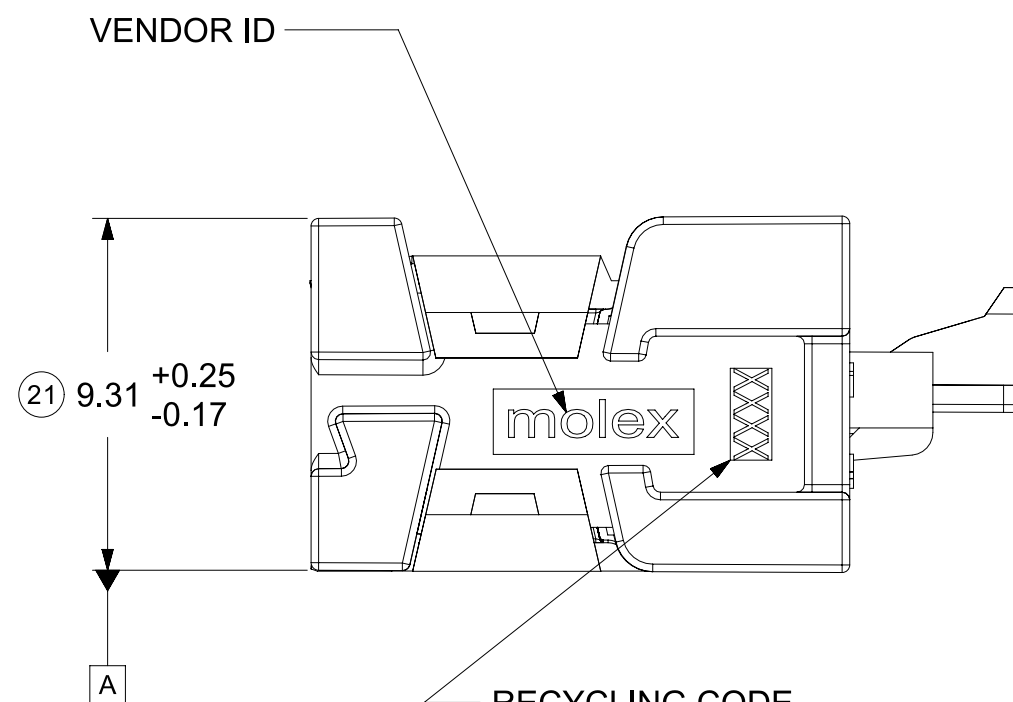


*NOTE: DATUMS A AND C ARE SIMILAR FOR 12-24CKT CONNECTORS

20CKT USCAR COMPATIBLE RECEPTACLE WITH CPA

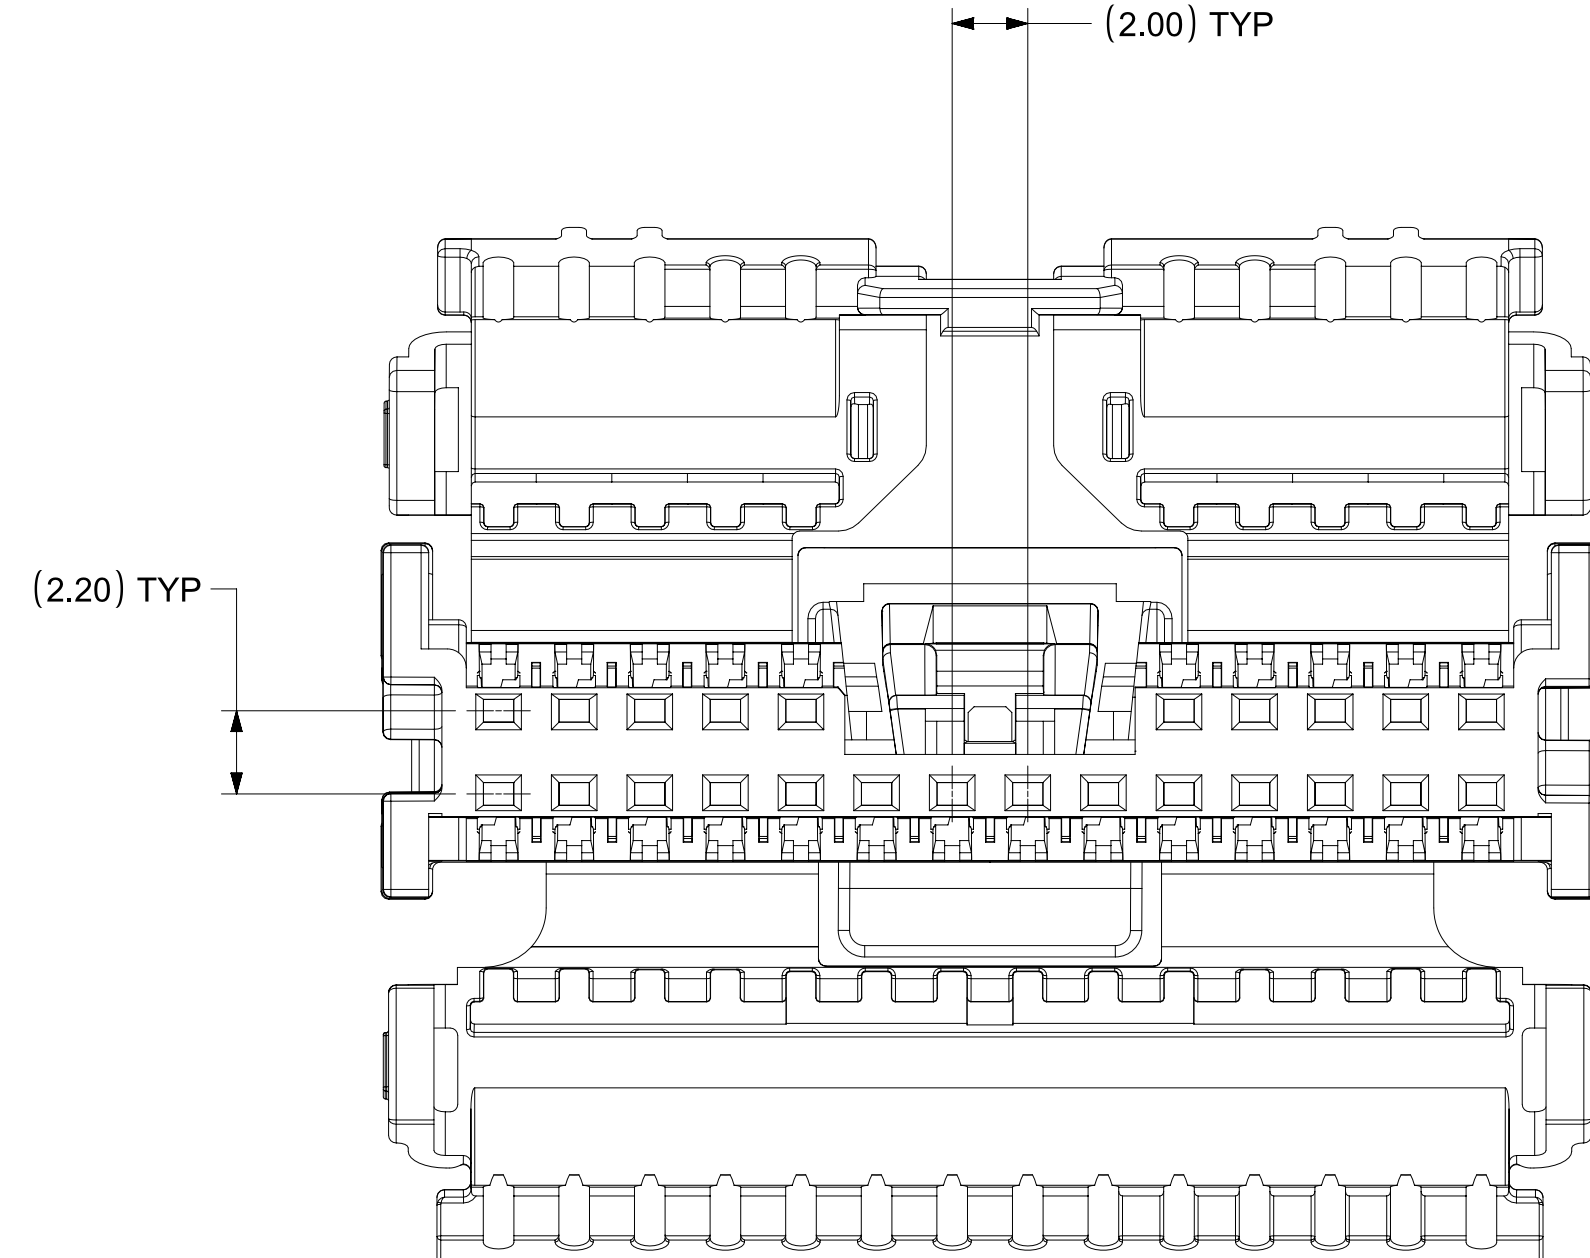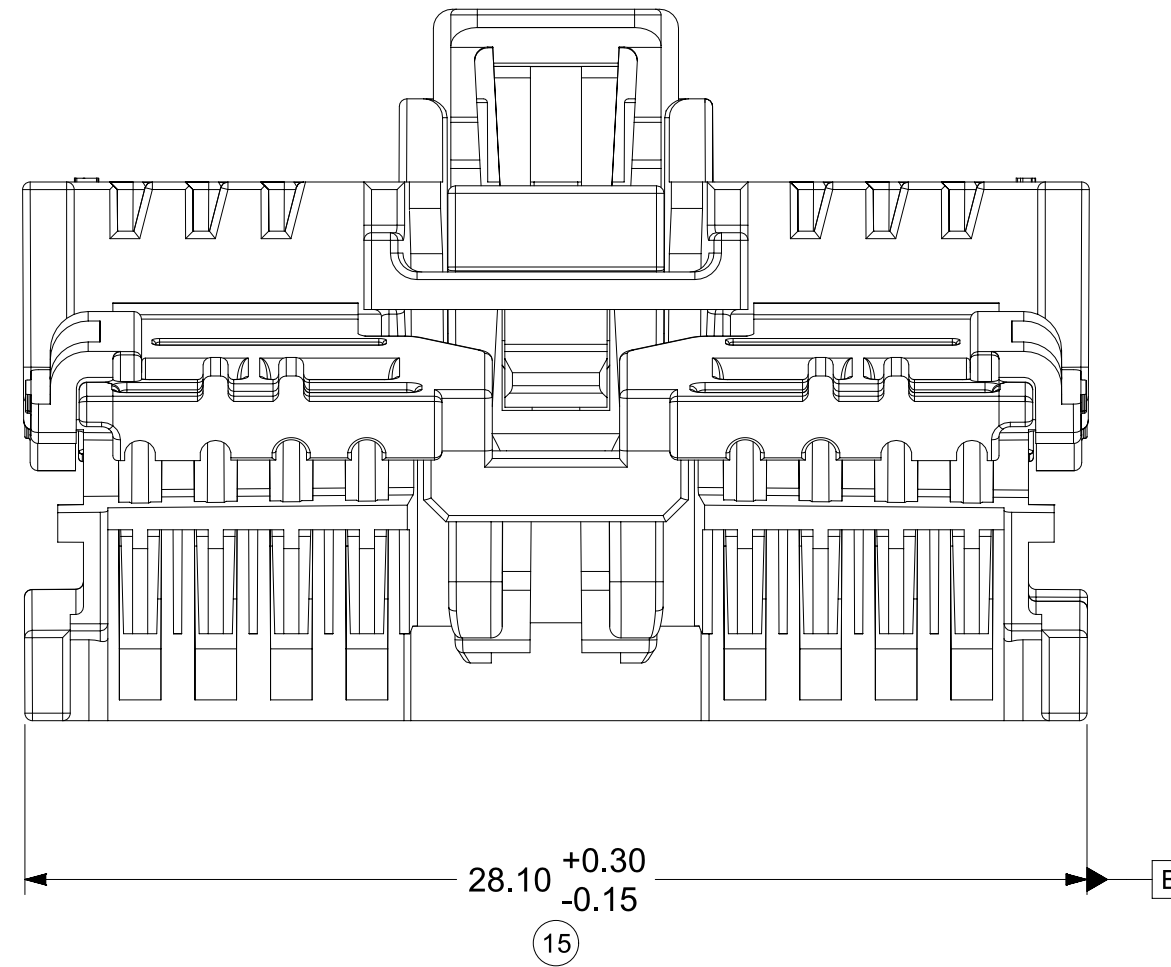

24CKT USCAR COMPATIBLE RECEPTACLE WITH CPA

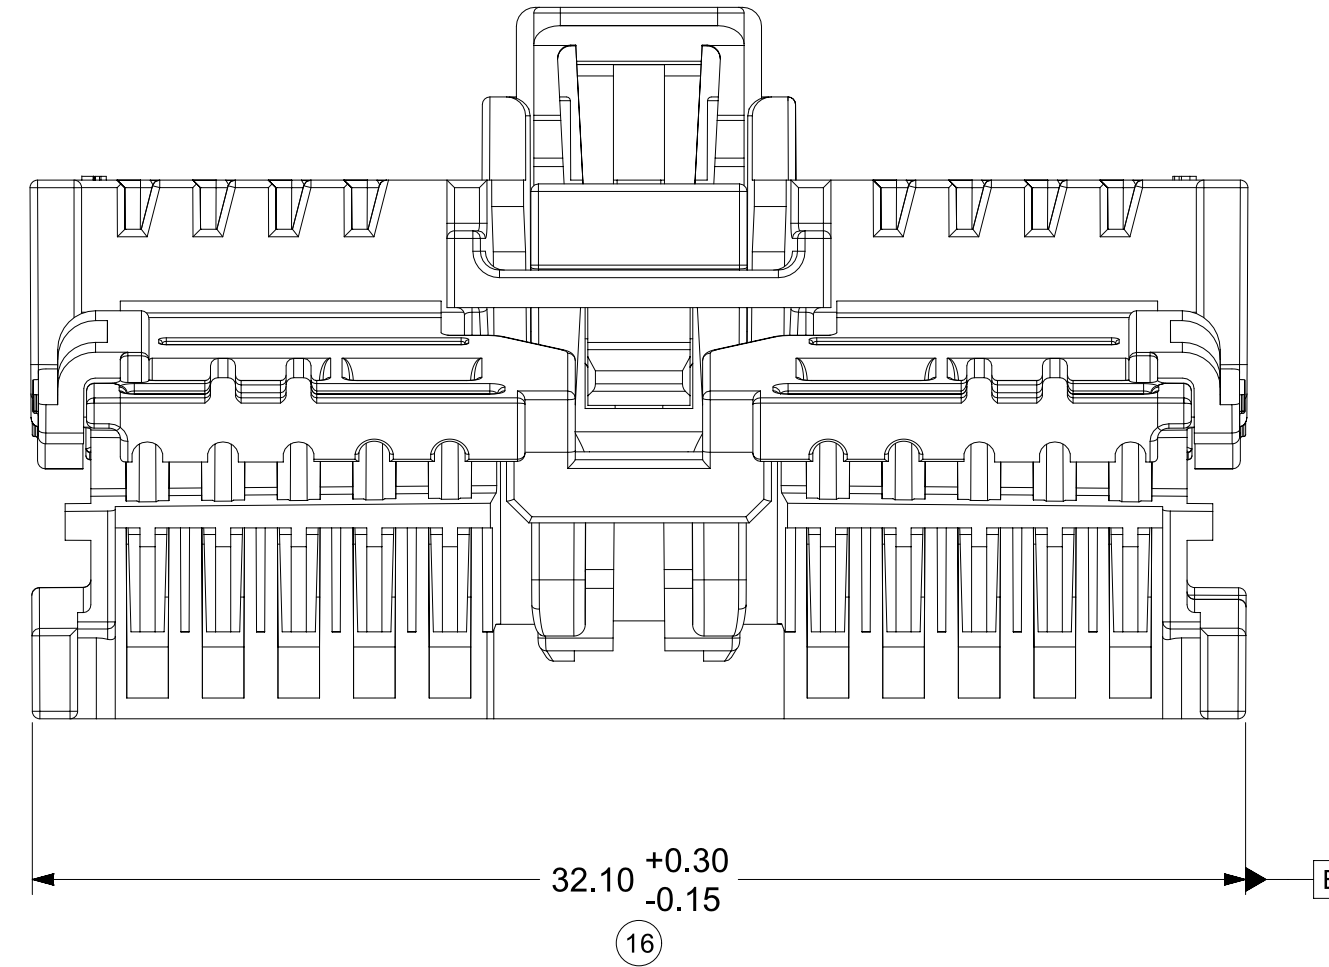

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
IF E/C = 0 E/P = 0 E/P = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC:					molex MINI50 RECEPTACLE WITH CPA SALES DRAWING						
	MM		5:1													
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
	ANGULAR TOL ± 1°															
	4 PLACES		±													
DIVISIONAL SYMBOLS	3 PLACES		±		STATUS: Production DRWN: Yann Chen 2023-10-20 CHK'D: Gang Li 2023-10-25 APPR: Colin Zhang 2023-10-30					PRODUCT SALES DRAWING						
	2 PLACES		± 0.100							DOCUMENT NUMBER		DOC TYPE		DOC PART	REVISION	
	1 PLACE		± 0.20							SD-34824-003		PSD		001	M16	
	0 PLACES		±													
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
						A1-SIZE		34824				GENERAL MARKET		3 OF 4		

SINGLE ROW ASSEMBLY (RECEPTACLE WITH CPA)

MOLEX MATERIAL NUMBER BULK PACKAGING PK-31301-538	GENERAL MOTORS PART NUMBER	CONFIGURATION	MATERIAL TYPE	CIRCUIT	POL	COLOR	MATING COMPONENT							
							SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER			RIGHT ANGLE THRU HOLE HEADER		
							TAPE AND REEL PACKAGING PK-31301-786	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TAPE AND REEL PACKAGING PK-47799-0001	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TAPE AND REEL PACKAGING PK-47799-0001
34791-5140	13507113	USCAR	PBT	4	A	BLACK	34912-8040	34912-9040	34792-0040	34792-9040	34792-8040	34793-0040	34793-9040	34793-8040
34791-5141	13507115	USCAR		4	B	LIGHT GRAY	34912-8041	34912-9041	34792-0041	34792-9041	34792-8041	34793-0041	34793-9041	34793-8041
34791-5142	13507116	USCAR		4	C	DARK GRAY	34912-8042	34912-9042	34792-0042	34792-9042	34792-8042	34793-0042	34793-9042	34793-8042
34791-5143	13507117	USCAR		4	D	GREEN	34912-8043	34912-9043	34792-0043	34792-9043	34792-8043	34793-0043	34793-9043	34793-8043
34791-5180	13507118	USCAR		8	A	BLACK	34912-8080	34912-9080	34792-0080	34792-9080	34792-8080	34793-0080	34793-9080	34793-8080
34791-5181	13507119	USCAR		8	B	LIGHT GRAY	34912-8081	34912-9081	34792-0081	34792-9081	34792-8081	34793-0081	34793-9081	34793-8081
34791-5182	13507120	USCAR		8	C	DARK GRAY	34912-8082	34912-9082	34792-0082	34792-9082	34792-8082	34793-0082	34793-9082	34793-8082

DUAL ROW ASSEMBLY (RECEPTACLE WITH CPA)

MOLEX MATERIAL NUMBER BULK PACKAGING PK-31301-538	GENERAL MOTORS PART NUMBER	CONFIGURATION	MATERIAL TYPE	CIRCUIT	POL	COLOR	MATING COMPONENT							
							SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER			RIGHT ANGLE THRU HOLE HEADER		
							TAPE AND REEL PACKAGING PK-31301-786	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TAPE AND REEL PACKAGING PK-47799-0001	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TAPE AND REEL PACKAGING PK-47799-0001
34824-2164	N/A	USCAR	ECOPAXX	16	A	BLACK	34897-8160	34897-9160	34825-0160	34825-9160	34825-8160	34826-0160	34826-9160	34826-8160
34824-2165	N/A	USCAR		16	B	LIGHT GRAY	34897-8161	34897-9161	34825-0161	34825-9161	34825-8161	34826-0161	34826-9161	34826-8161
34824-2166	N/A	USCAR		16	C	DARK GRAY	34897-8162	34897-9162	34825-0162	34825-9162	34825-8162	34826-0162	34826-9162	34826-8162
34824-2204	13544280	USCAR		20	A	BLACK	34897-8200	34897-9200	34825-0200	34825-9200	34825-8200	34826-0200	34826-9200	34826-8200
34824-2205	13544281	USCAR		20	B	LIGHT GRAY	34897-8201	34897-9201	34825-0201	34825-9201	34825-8201	34826-0201	34826-9201	34826-8201
34824-2206	13544282	USCAR		20	C	DARK GRAY	34897-8202	34897-9202	34825-0202	34825-9202	34825-8202	34826-0202	34826-9202	34826-8202
34824-2244	N/A	USCAR		24	A	BLACK	34897-8240	34897-9240	34825-0240	34825-9240	34825-8240	34826-0240	34826-9240	34826-8240
34824-2245	N/A	USCAR		24	B	LIGHT GRAY	34897-8241	34897-9241	34825-0241	34825-9241	34825-8241	34826-0241	34826-9241	34826-8241
34824-2246	N/A	USCAR	24	C	DARK GRAY	34897-8242	34897-9242	34825-0242	34825-9242	34825-8242	34826-0242	34826-9242	34826-8242	
34824-5124	13507121	USCAR	PBT	12	A	BLACK	34897-8120	34897-9120	34825-0124	34825-9124	34825-8124	34826-0124	34826-9124	34826-8124
34824-5125	13507122	USCAR		12	B	LIGHT GRAY	34897-8121	34897-9121	34825-0125	34825-9125	34825-8125	34826-0125	34826-9125	34826-8125
34824-5126	13507114	USCAR		12	C	DARK GRAY	34897-8122	34897-9122	34825-0126	34825-9126	34825-8126	34826-0126	34826-9126	34826-8126
*NOTE: CONFIGURATION CONSISTS OF AN EXPANSION OF THE 12CKT USCAR-COMPATIBLE CONFIGURATION TO ALLOW FOR 16, 20, AND 24 CIRCUITS														

MINI50 CPA (APPLIED TO SINGLE & DUAL ROW BRIDGED RECEPTACLES)

MATERIAL NUMBER	COLOR	MATING COMPONENT
34824-7000	NATURAL	SEE CHARTS ABOVE

CTX50 UNSEALED RECEPTACLE TERMINALS

PART NUMBER		MATERIAL	WIRE GAGE (mm ²)	GRIP	STATUS
D-WIND (LEFT PAYOFF)	B-WIND (RIGHT PAYOFF)				
560023-0448	560023-0450	COPPER ALLOY	0.35	LARGE	PLAN OBSOLESCENCE IN 2024
560023-0421	560023-0423	COPPER ALLOY	0.22	MEDIUM	PLAN OBSOLESCENCE IN 2024
560023-0444	560023-0445	COPPER ALLOY	0.13	SMALL	PLAN OBSOLESCENCE IN 2024
560023-0748	560023-0750	COPPER ALLOY	0.35	LARGE	SALEABLE
560023-0721	560023-0723	COPPER ALLOY	0.22	MEDIUM	SALEABLE
560023-0744	560023-0745	COPPER ALLOY	0.13	SMALL	SALEABLE

FUNCTIONAL SYMBOLS  = 0  = 0  = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
	DIMENSION UNITS		SCALE		
	MM		1:1		
	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	ANGULAR TOL ± 1°				
	4 PLACES ±				
	3 PLACES ±				
	2 PLACES ± 0.100				
1 PLACE ± 0.20					
0 PLACES ±					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION			
		DRAWING	SERIES		
		A1-SIZE	34824		

CURRENT REV DESC:	
STATUS: Production	
DRWN: Yann Chen	2023-10-20
CHK'D: Gang Li	2023-10-25
APPR: Colin Zhang	2023-10-30

molex				
MINI50 RECEPTACLE WITH CPA SALES DRAWING				
PRODUCT SALES DRAWING				
DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
SD-34824-003		PSD	001	M16
MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
		GENERAL MARKET		4 OF 4