



产品编号：[350230003](#)
Product Description：2.00mm Pitch, Board-In Crimp Housing, Right-Angle and Vertical, 3 Circuits, Natural
系列号：35023
状态：Active
Product Category：Connector Housings



文件和资源

图纸
[图纸 350230003_sd.pdf](#)

3D 模型和设计文件
[3D模型 350230003_stp.zip](#)

规格
[包装规格 PK-35023-001-001.pdf](#)
[产品规格 PS-35023-001-001.pdf](#)

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

[多部分产品合规性声明](#)
- Eu RoHS
- REACH SVHC
- Low-Halogen

[多部分行业合规性文件](#)
- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	35023
说明	2.00mm Pitch, Board-In Crimp Housing, Right-Angle and Vertical, 3 Circuits, Natural
应用	Signal, Wire-to-Board
产品系列	Board-in Connectors
产品名称	Board-in
UPC	800753750845

机构

CSA	LR19980
UL	E29179

物理




电路数（最多）	3
颜色-树脂	Natural
阻燃性	94V-0
性别	不适用
符合灼热丝规范	否
材料 - 树脂	Nylon
净重	0.063/g
行数	1
包装形式	Bag
面板安装式	否
间距 - 插配接口	2.00mm
可堆叠的	否
运行温度范围	-40° to +105° C

进程

无铅	不适用
----	-----

可连接使用部件



描述	产品编号
2.00/2.50mm Board-in Terminal, Pre-Tin Plating, Wire Insulation Diameter 1.50mm max.	/content/molex/molex-dot-com/cn/zh/products/product-page.html/350449102.html
2.00mm Pitch, Board-in Male Crimp Terminal, Right-Angle, Brass Tin (Sn) Plating, 24-30 AWG, Reel	/content/molex/molex-dot-com/cn/zh/products/product-page.html/350211201.html
2.00mm Pitch, Board-in Male Crimp Terminal, Right-Angle, Pre-Plated, 24-30 AWG, Reel	/content/molex/molex-dot-com/cn/zh/products/product-page.html/350211301.html
2.00mm Pitch, Board-in Male Crimp Terminal, Right-Angle, Post-Tin Plated, 24-30 AWG, Reel	/content/molex/molex-dot-com/cn/zh/products/product-page.html/350211360.html

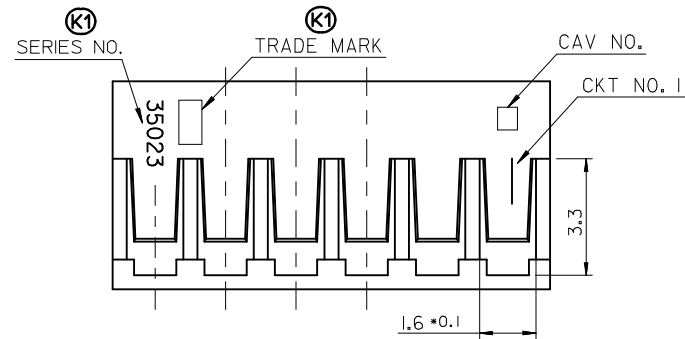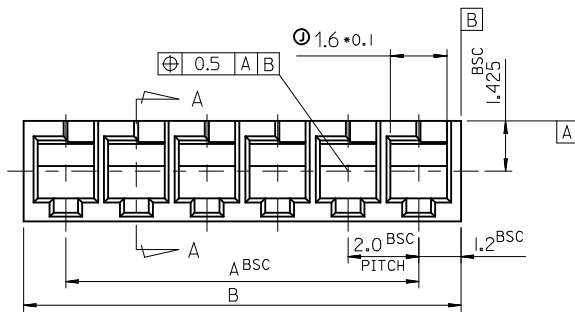

NOTE

1. MATERIAL : POLYAMIDE 66(PA66), UNFILLED, UL94V-0; COLOR: IVORY
2. PRODUCT SPECIFICATION : PS-35023-001
3. PACKAGING SPECIFICATION : PK-35023-001
4. APPLICABLE TERMINAL :

R/A: 35021-1201/1301/1310/1360
ST.: 35044-9101/9102/9110/9210
35044-9160/9260

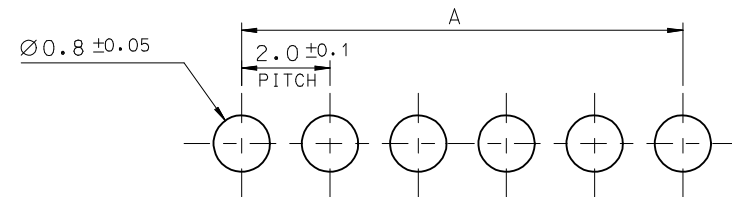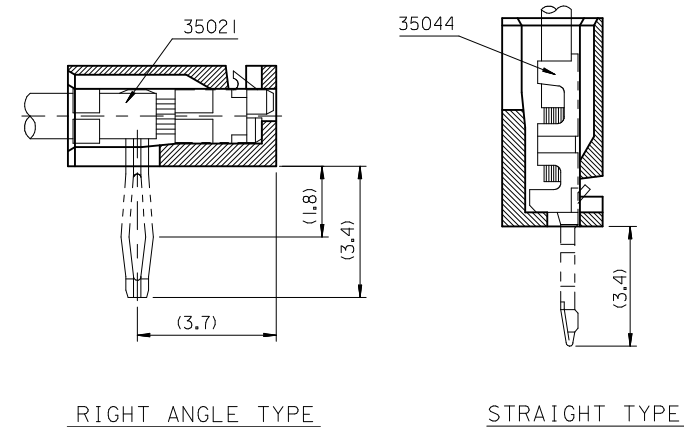

(K1)* LEGEND

35023 - 00**

CKT NO.(02,03,04...)

				18.4	16.0	- 00**	9
32.4	30.0	35023- 00**	16	16.4	14.0	- 00**	8
30.4	28.0	- 00**	15	14.4	12.0	- 00**	7
28.4	26.0	- 00**	14	12.4	10.0	- 00**	6
26.4	24.0	- 00**	13	10.4	8.0	- 00**	5
24.4	22.0	- 00**	12	8.4	6.0	- 00**	4
22.4	20.0	- 00**	11	6.4	4.0	- 00**	3
20.4	18.0	- 00**	10	4.4	2.0	35023- 00**	2
B	A	ENG NO.	CKT NO.	B	A	ENG NO.	CKT NO.

REVISED EC NO: KOR2013-0030 DRWN:SKCH0 CHKD: APPR:YSKIM02 2012/09/04 2012/09/17	DESCRIPTION	QUALITY SYMBOLS ▽=0 C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1/1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
K1	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					