

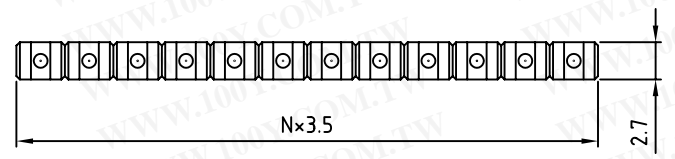


SIGN	DATE	DESCRIPTION	APPROVER
△	02/07'06	Part No. changed	Tony
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

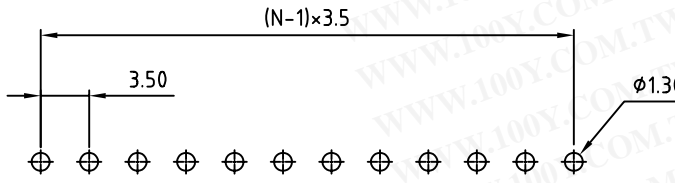

N = Number of contact

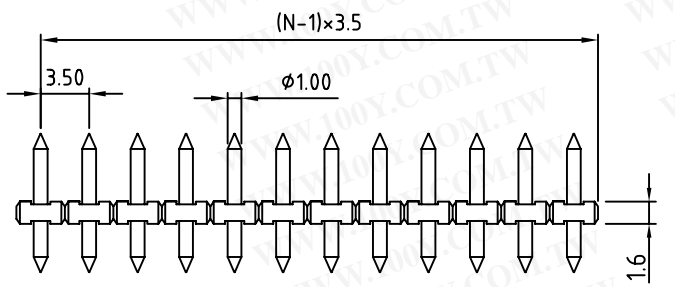

P.C.B. LAYOUT

- Material:
- Solid PIN: Brass(CuZn)
 - Surface of solder tail: Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)
- Electrical:
- Voltage rating: 150V
 - Current rating: 10A
 - Withstanding Voltage: 1.3KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 245°C±10°C/5 Sec
 - Safety Approval:
- △ ● Part No.:

OP xx 2 B 0 x xxxx G

POLES ———

02 pole

... ..

24 pole

0 PA66

1 PA46

G: Pb<4000ppm

0000: Standard
Any special item by
customer request.
please contact sales
department.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TITLE		OP 3.5 Series (配EH專用)			
PART NO.	OPxx2B0xxxxxG	DWG NO.	80P0501		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Tony 2006.02.07	Tony 2006.02.07		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
					UNIT: mm
				SHEET: 01/01	SCALE: NONE