

PC 4/ 2-ST-7,62

Order No.: 1804904

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804904>Plug component, nominal current: 20 A, rated voltage: 400 V, pitch:
7.62 mm, no. of positions: 2, type of connection: Screw connection**Commercial data**

EAN	4017918046347
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.008769 KG
Catalog page information	Page 322 (CC-2007)

Product notesWEEE/RoHS-compliant since:
09/08/2005<http://>www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.**Technical data****Dimensions / positions**

Pitch	7.62 mm
Dimension a	7.62 mm
Number of positions	2
Screw thread	M3
Tightening torque, min	0.5 Nm

勝特力材料 86-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical data

Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Nominal voltage U_N	400 V
Nominal cross section	4 mm ²
Maximum load current	20 A
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A4
Stripping length	7 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	2.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²

Certificates / Approvals



Certification

BV, CSA, CUL, GOST, RS, UL

CSA

Nominal voltage U _N	300 V
Nominal current I _N	20 A
AWG/kcmil	28-10

CUL

Nominal voltage U _N	600 V
Nominal current I _N	20 A
AWG/kcmil	30-10

UL

Nominal voltage U _N	600 V
Nominal current I _N	20 A
AWG/kcmil	30-10

Accessories

Item	Designation	Description
General		
1837227	KGG-PC 4/ 3	Cable housing, for cable diameters of 4 -8 mm, clamp, marker strips and transparent label carrier are included, color: green, no. of positions: 3

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1837324	KGG-PC 4/ 3-F	Cable housing with screw flange, for cable diameters of 4 -8 mm, clamp, marker strips and transparent label carrier are included, color: green, no. of positions: 3
1837256	KGS-PC 4/ 6	Cable housing, for cable diameters of 6 - 16 mm, marker strips and transparent label carrier are included, color: green, no. of positions: 6
1837353	KGS-PC 4/ 6-F	Cable housing with screw flange, for cable diameters of 6 - 16 mm, marker strips and transparent label carrier are included, color: green, no. of positions: 6

Marking

0804549	SK 7,62/3,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 1-10, 11-20 etc. up to 91-99, sufficient for 120 terminal blocks
---------	--------------------------	---

Plug/Adapter

1600027	CP-HCC 4	Keying profile, is inserted into the slot on the plug and header, red insulating material
---------	----------	---

Tools

1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm ² connection cross section, blade: 0.6 x 3.5 mm, without VDE approval
---------	-------------	--


Additional products

Item	Designation	Description
General		
1849998	PCVK 4-7,62	Modular terminal blocks with plug entry, cross section: 0.2 - 4 mm ² , AWG: 30 - 10, width: 7.6 mm, color: green
1876246	PCVK 4-7,62-PE	Modular terminal blocks with plug entry, cross section: 0.2 - 4 mm ² , width: 7.6 mm, color: green-yellow
1838381	UPCV3K 4-G-7,62	Modular terminal blocks with POWER-COMBICON plug entries, cross section: 0.2 - 4 mm, AWG: 30 - 10, width: 7.6 mm, color: gray


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Drawings

Diagram

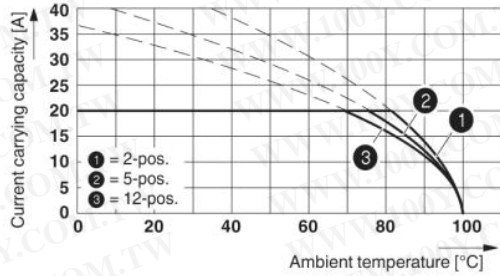


Derating curve for: PC 4/...-ST-7,62 with PC 4/...-G-7,62

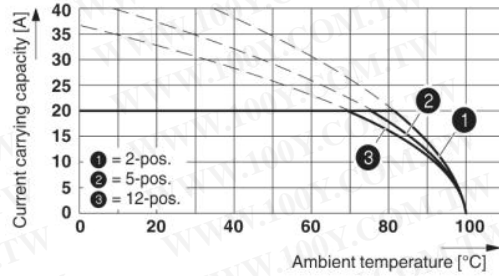

Derating curve for: PC 4/...-ST-7,62 with PCV 4/...-G-7,62

Dimensioned drawing

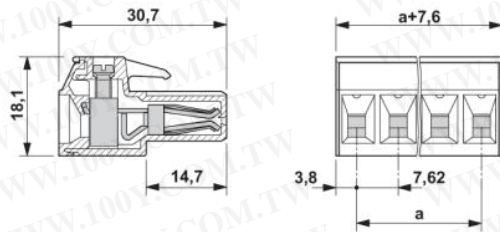

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Address

Nanjing Phoenix Contact Co. Ltd.
No. 36 Phoenix Road - Jiangning Development Zone /
P.O. Box 236 Jiangning Nanjing
CN-211100 Nanjing, China
Phone +86/25-5212-1888
Fax +86/25-5212-1999 or 1555
<http://www.phoenixcontact.com.cn>



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

© 2008 Phoenix Contact
Technical modifications reserved;