
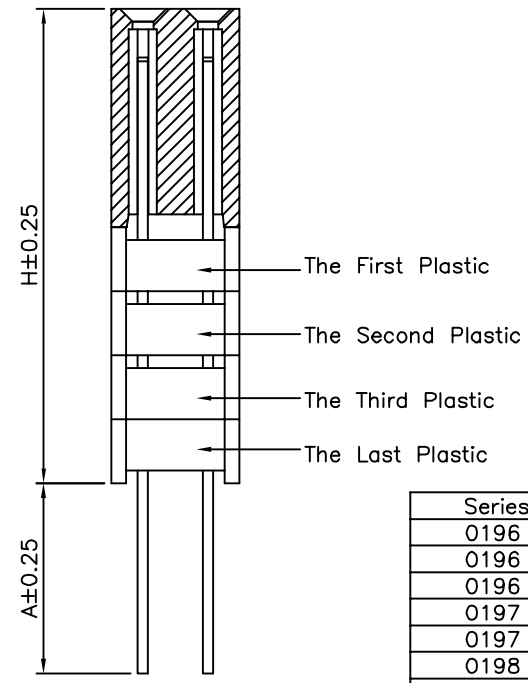
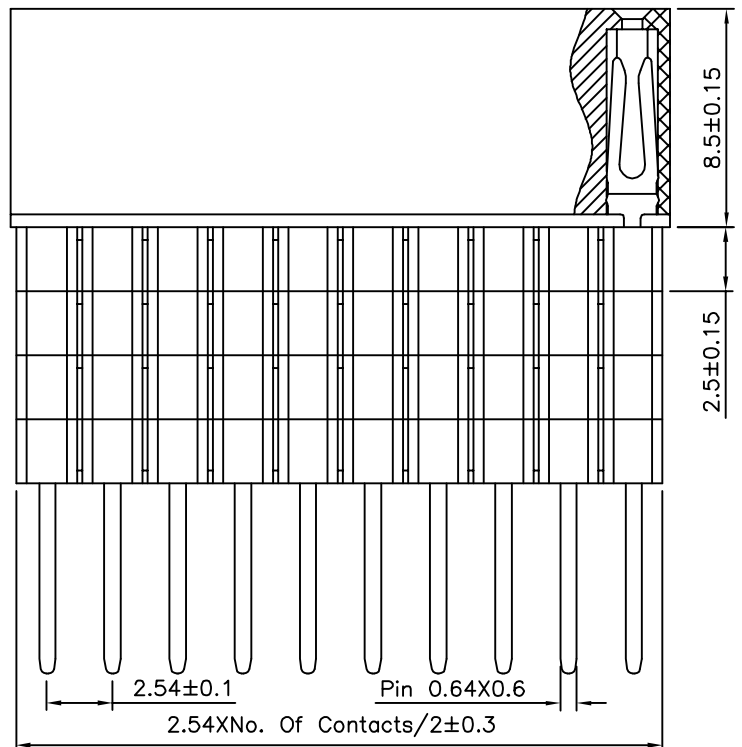


Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

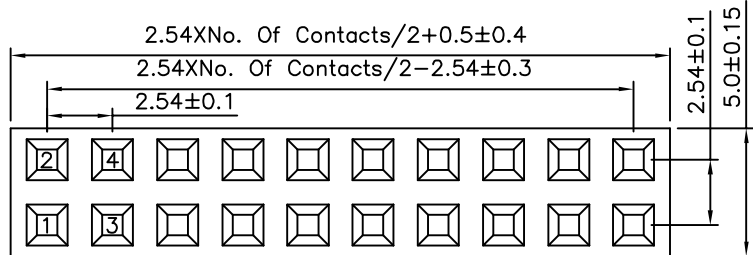

SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ± 0.25 X*: $\pm 2^{\circ}$.X: ± 0.20 .X*: $\pm 1.5^{\circ}$.XX: ± 0.15 .XX*: $\pm 1^{\circ}$.XXX: ± 0.10 .XXX*: $\pm 0.5^{\circ}$	
11297		EMILY			
		CHECKED BY			
		HZF			
		DRAWING BY			
		HAO			
SCALE	NONE	REV.	A0	UNIT	mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	05/03/2014
		REVISIONS		