


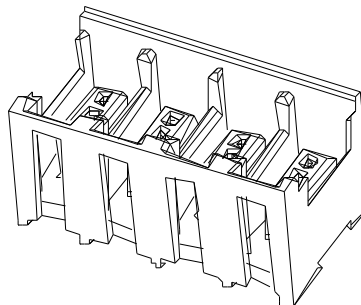

Insulation:

Material: PBT

Flammability: UL 94V-0

Color: Black

Contact:

Material:

Plating:

nderplat

Wiping Area: 0.2 μm [8 μ''] minimum Gold with

Soldertails: Gold Flash

Electrical:

Current Rating: 3.0 Amps

Voltage Rating: 32 Volts

Insulation Resistance: >1

Withstanding Voltage: 1,000 VRMS at sea level

Temperature Rating: -20°C to +85°C ambient (1.0 A max.)

-20°C to +75°C ambient (2.0 A max.)

-20°C to +60°C ambient (3.0 A max.)

(Note: UL rating is 65°C at 3.0A, 32V)

Process Rating: 260°C max. for wave solder reflow

390°C max. for soldering iron

D			QUALITY	SYMBOLS		UNIT	SCALE	TOLERANCES	REMARKS					PART REMARKS		
C			□ :	☒ :		mm	1:1	DIM. ±0.30	APPROVED	CHECKED	DESIGN	DRAWN	PART NO.		SHT	1/1
B			CRITICAL	MAJOR		勝特力電材超市-龍山店 886-3-5773766 勝特力電材超市-光復店 886-3-5729570 勝特力電子(上海) 86-21-34970699 勝特力電子(深圳) 86-755-83298787 http://www.100v.com.tw										
A			▽ :	▽ :					DESCRIPTION	EK-B403						
RED	DESCRIPTION	DATE	ZERO DEFECT	S.P.C									DRAWING NO.		REV	D