THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T	REVISED PER ECO-16-001548	24FEB2016	AP	DG

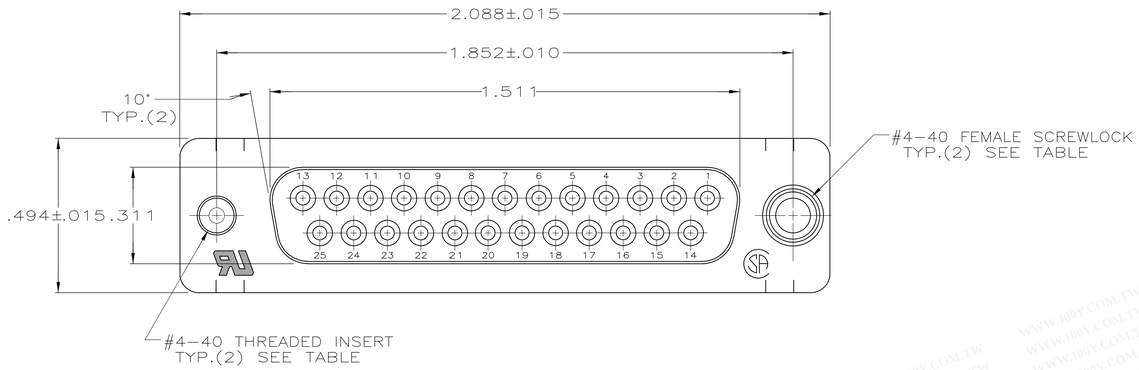

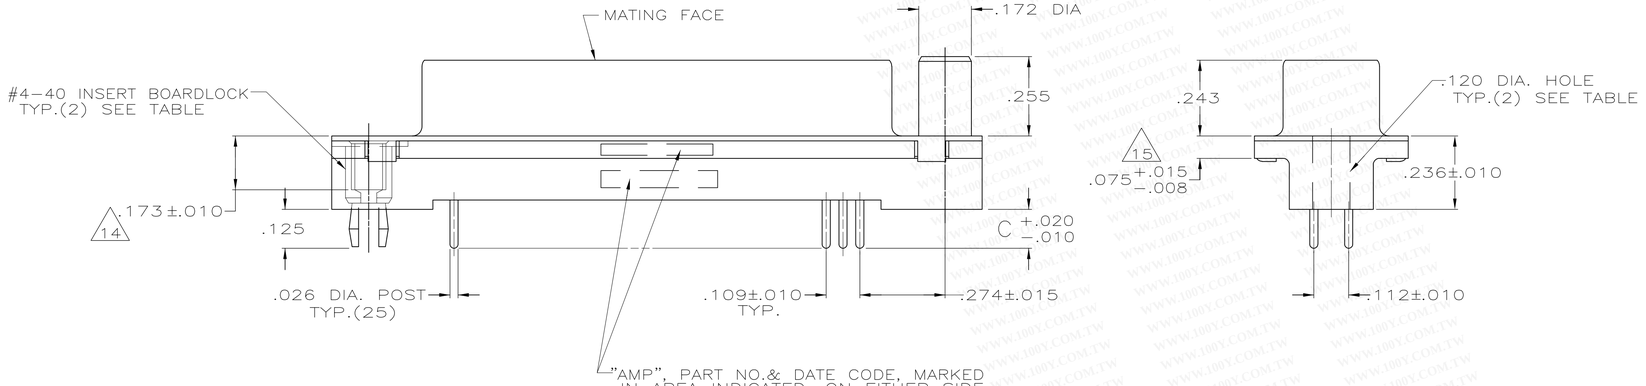

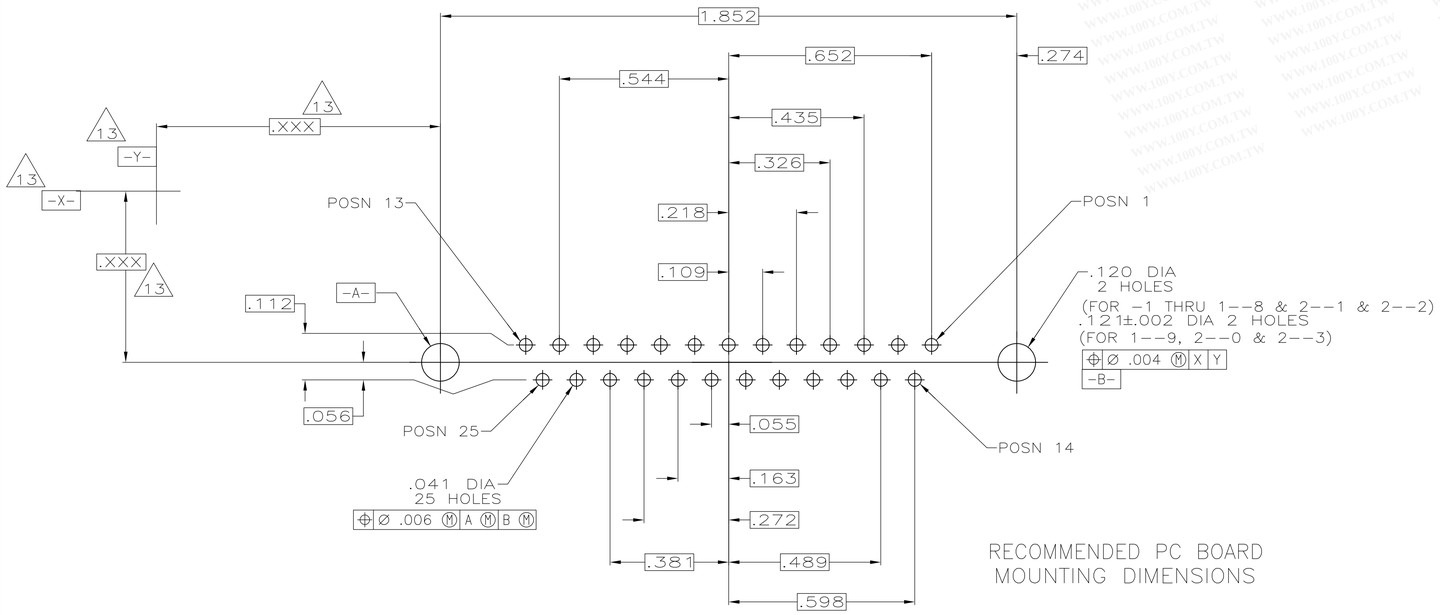

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

1. FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
2. CARBON STEEL.
3. PHOS. BRONZE.
4. INSERTS & BOARDLOCKS: BRASS, SCREWLOCKS: ZINC.
5. NOTE DELETED.
6. .000200 MIN TIN OVER .000100 MIN COPPER.
7. INSERTS: UNPLATED, SCREWLOCKS: UNPLATED, BOARDLOCKS: TIN OVER COPPER.
8. GOLD FLASH FOR LENGTH OF .100 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
9. .000030 GOLD FOR LENGTH OF .100 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
10. .000010 GOLD FOR LENGTH OF .100 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
11. NOTE DELETED.
12. CONTACTS SELECTIVELY LOADED IN POSITIONS 1 THRU 19 AND 21 THRU 25.
13. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
14. RECOMMENDED SCREWLOCK IS 5747877-3 WITH RETENTION INSERTS.
15. .110 MAX IN SHELL TAB CLINCH AREAS.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

12					
SUPERSEDED BY 2-747708-0	W/INSERT BOARDLOCKS		9	.125	2-747708-3
SUPERSEDED BY 1-745967-6	W/FEMALE SCREWLOCKS		9	.170	2-747708-2
OBSOLETE	W/ THREADED INSERTS		10	.125	2-747708-1
	WITH		9	.125	2-747708-0
OBSOLETE	INSERT BOARDLOCKS		8	.125	1-747708-9
OBSOLETE			9	.250	1-747708-8
OBSOLETE			8	.250	1-747708-7
OBSOLETE	WITH		9	.170	1-747708-6
OBSOLETE	FEMALE SCREWLOCKS		8	.170	1-747708-5
SUPERSEDED BY 1-745967-4			9	.125	1-747708-4
OBSOLETE			8	.125	1-747708-3
OBSOLETE			9	.250	1-747708-2
OBSOLETE			8	.250	1-747708-1
OBSOLETE	WITH		9	.170	1-747708-0
OBSOLETE	THREADED INSERTS		8	.170	747708-9
SUPERSEDED BY 745967-8			9	.125	747708-8
OBSOLETE			8	.125	747708-7
OBSOLETE			9	.250	747708-6
OBSOLETE			8	.250	747708-5
OBSOLETE	WITH		9	.170	747708-4
OBSOLETE	.120 DIA. HOLE		8	.170	747708-3
SUPERSEDED BY 745967-2			9	.125	747708-2
SUPERSEDED BY 745967-1			8	.125	747708-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± 2°

MATERIAL HOUSING: 1 -
SHELL: 2 CONTACTS: 3 INSERTS, SCREWLOCKS AND BOARDLOCKS: 4

FINISH SHELL: 2 -
CONTACTS: SEE TABLE
INSERTS, SCREWLOCKS & BOARDLOCKS: 4

DWN S. WELDON 2-27-85
CHK J. GERACE 2-27-85
APVD -
PRODUCT SPEC 108-40025
APPLICATION SPEC 114-40023
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE ASSEMBLY, SIZE 3, 25 POS., VERTICAL, .026 DIA. DUPLEX PLATED POSTS, FRONT SHELL, AMPLIMITE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-747708	-

SCALE NTS SHEET 1 OF 1 REV T

4805 (1/15)