

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - By - TE CONNECTIVITY



ALL RIGHTS RESERVED.

REVISIONS

P	LTN	DESCRIPTION	DATE	DWN	APVD
V		REVISED PER ECR-20-000822	27MAY2020	PC	SW

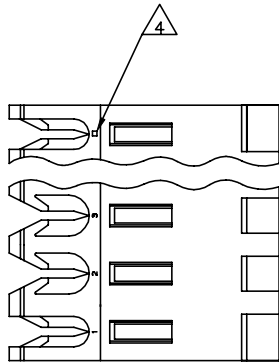

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

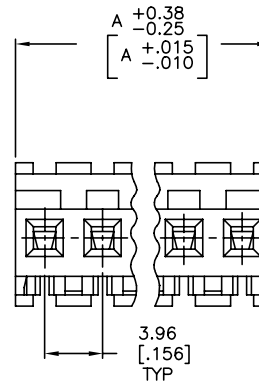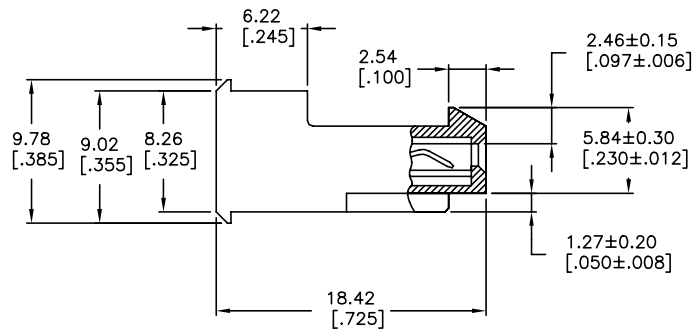

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 640601-2 THRU 2-640601-4)
(MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
THICKNESS OVER NICKEL UNDERPLATE FOR
3-640601-2 THRU 5-640601-4).

2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.

3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5 DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8 OBSOLETE PARTS

		95.10	[3.744]	24	5-640601-4
		91.14	[3.588]	23	5-640601-3
		87.17	[3.432]	22	5-640601-2
		83.21	[3.276]	21	5-640601-1
		79.25	[3.120]	20	5-640601-0
		75.29	[2.964]	19	4-640601-9
		71.32	[2.808]	18	4-640601-8
		67.36	[2.652]	17	4-640601-7
		63.40	[2.496]	16	4-640601-6
		59.44	[2.340]	15	4-640601-5
		55.47	[2.184]	14	4-640601-4
		51.51	[2.028]	13	4-640601-3
		47.55	[1.872]	12	4-640601-2
		43.59	[1.716]	11	4-640601-1
		39.62	[1.560]	10	4-640601-0
		35.66	[1.404]	9	3-640601-9
		31.70	[1.248]	8	3-640601-8
		27.74	[1.092]	7	3-640601-7
		23.77	[.936]	6	3-640601-6
		19.81	[.780]	5	3-640601-5
		15.85	[.624]	4	3-640601-4
		11.89	[.468]	3	3-640601-3
		7.92	[.312]	2	3-640601-2
	OBSOLETE	95.10	[3.744]	24	2-640601-4
SUPERSEDED 7		91.14	[3.588]	23	2-640601-3
		87.17	[3.432]	22	2-640601-2
		83.21	[3.276]	21	2-640601-1
		79.25	[3.120]	20	2-640601-0
		75.29	[2.964]	19	1-640601-9
		71.32	[2.808]	18	1-640601-8
		67.36	[2.652]	17	1-640601-7
8	SUPERSEDED	63.40	[2.496]	16	1-640601-6
	OBSOLETE	59.44	[2.340]	15	1-640601-5
	SUPERSEDED 7	55.47	[2.184]	14	1-640601-4
		51.51	[2.028]	13	1-640601-3
8	SUPERSEDED	47.55	[1.872]	12	1-640601-2
7	SUPERSEDED	43.59	[1.716]	11	1-640601-1
8	SUPERSEDED	39.62	[1.560]	10	1-640601-0
		35.66	[1.404]	9	640601-9
		31.70	[1.248]	8	640601-8
		27.74	[1.092]	7	640601-7
		23.77	[.936]	6	640601-6
		19.81	[.780]	5	640601-5
		15.85	[.624]	4	640601-4
		11.89	[.468]	3	640601-3
		7.92	[.312]	2	640601-2
			DIM A	NO OF CIRCUITS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91	APVD D. CLARK 19 FEB 91	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-1051		
MATERIAL		APPLICATION SPEC 114-1020		
FINISH		SIZE A2		
1		CAGE CODE 00779		
1		DRAWING NO C=640601		
CUSTOMER DRAWING		RESTRICTED TO -		
SCALE 4:1		SHEET 1 OF 1		
REV V				




MTA 156

TE Internal #: 3-640601-2

Connector Assembly, Receptacle, Wire-to-Board, 2 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-2, MTA 156, Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

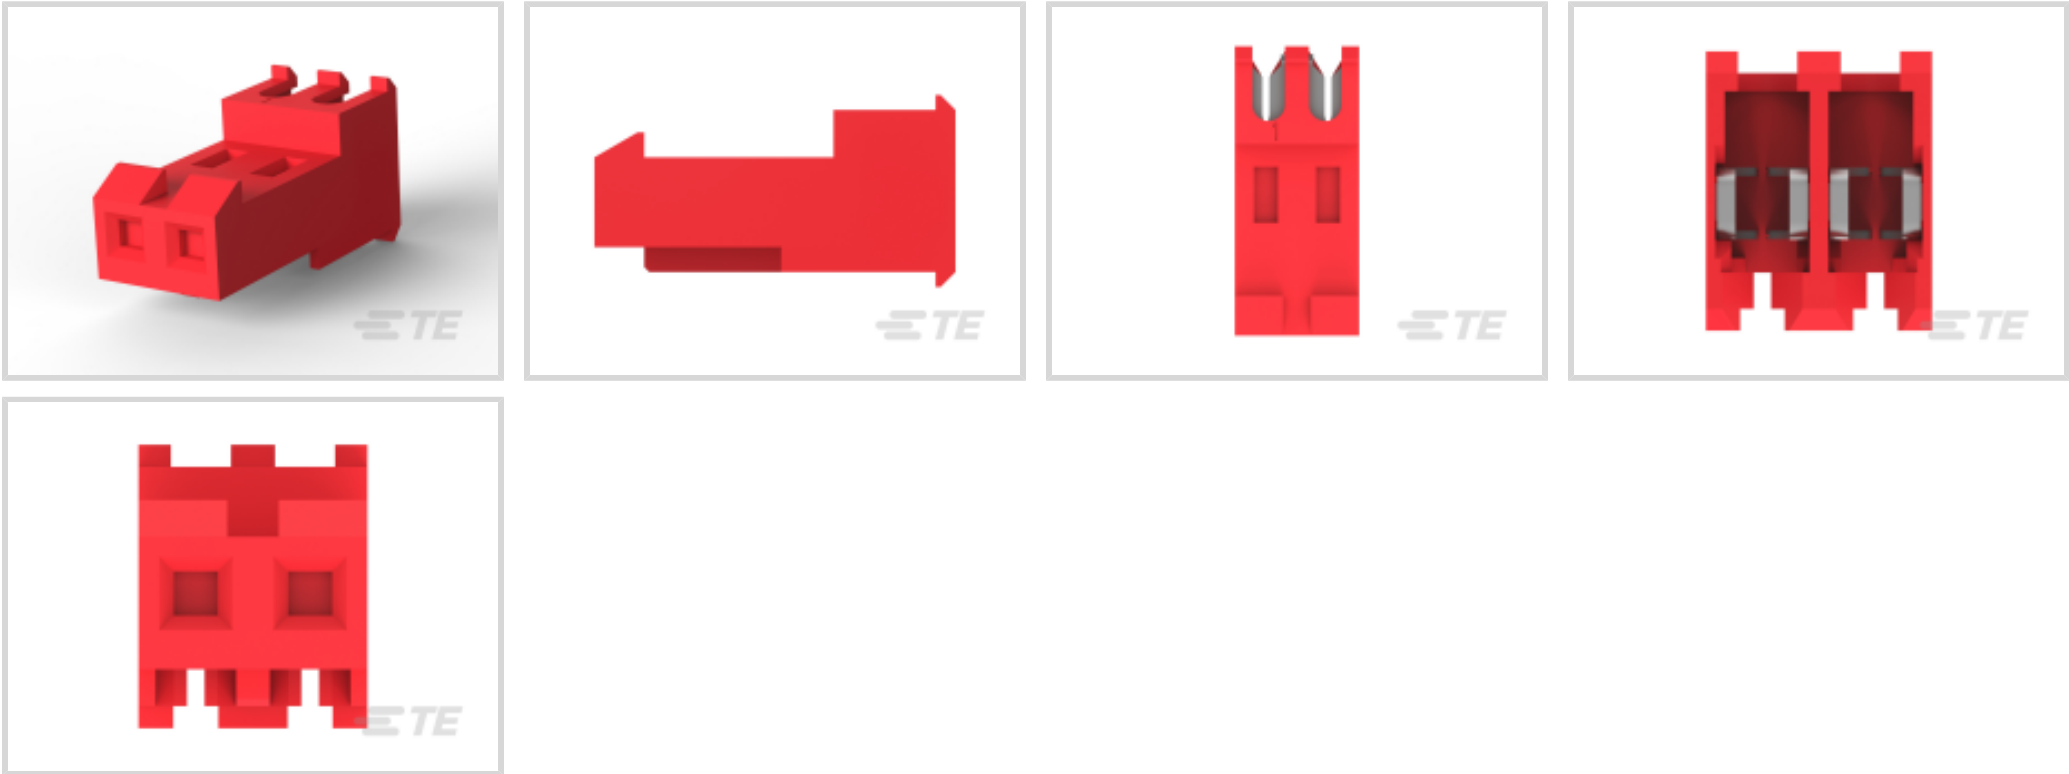

Rectangular Power Connector Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Power Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Cable Exit Angle	90°
------------------	-----



Connector Profile	Standard
Contact Features	
Contact Layout	Inline
Contact Underplating Material Thickness	30 µm[.762 µin]
Wire Contact Termination Area Plating Thickness	2.03 – 5.08 µm[80 – 200 µin]
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	With
Contact Type	Receptacle
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 µm[80 µin]
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
Strain Relief	With
Mating Retention	With
Mating Alignment	Without
Contact Retention Type Within Housing	Locking Lance
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Ramp
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Wire & Cable IDC Installation Type	Feed Through
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Red
Housing Material	Nylon
Dimensions	



Connector Height	9.78 mm[.385 in]
Product Length	7.92 mm[.312 in]
Compatible Insulation Diameter Range	2.41 mm[.095 in]
Wire Size	.325 mm ²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	500
Packaging Method	Bag & Box

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)











EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

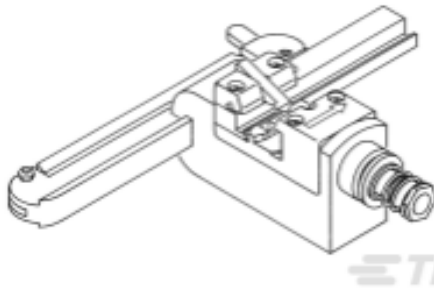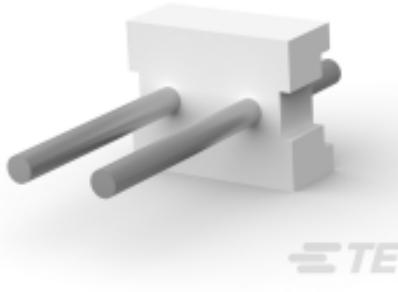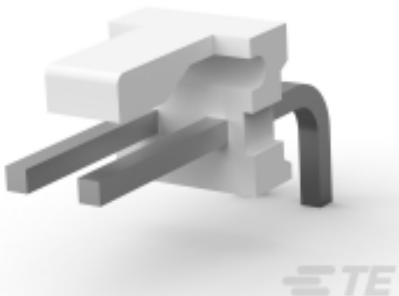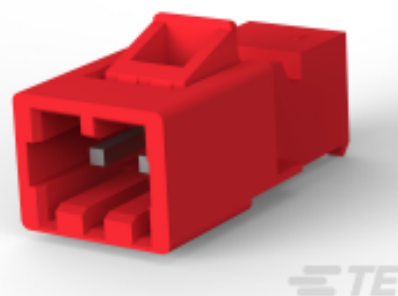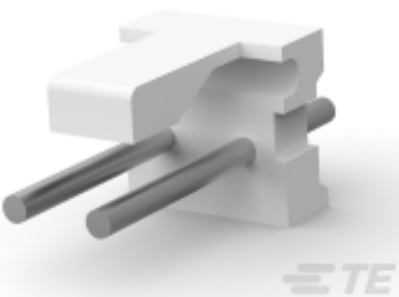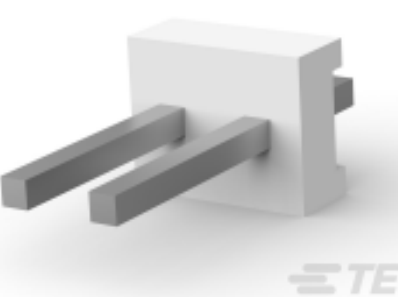 TE Part # 58074-1 MTA 50/100/156 MANUAL TOOL FRAME	 TE Part # 59804-1 MAINTENANCE TOOL	 TE Part # 58443-1 MTA 156 CRIMP HEAD PRODUCTION FEED THRU	 TE Part # 640384-2 02P MTA156 HDR ASSY STR RND SN FEED THRU
 TE Part # 640643-2 02P MTA156 COVER F/T	 TE Part # 3-641436-2 02P MTA156 CON ASSY LF	 TE Part # 643067-2 02P MTA156 MOLDED COVER	 TE Part # 640551-2 02P MTA156 COVER
 TE Part # 640389-2 02P MTA156 HDR ASSY SQ R/A F/L	 TE Part # 644753-2 02P MTA156 HDR ASSY RN STR F/L	 TE Part # 644752-2 02P MTA156 HDR ASSY SQ STR F/L	 TE Part # 3-641437-2 02P MTA156 PSTD CONN ASSY RED
 TE Part # 640388-2 02P MTA156 HDR ASSY RN STR F/L	 TE Part # 640385-2 02P MTA156 HDR ASSY SQ R/A	 TE Part # 640445-2 02P MTA156 HDR ASSY FL/STR SN	 TE Part # 640383-2 02P MTA156 HDR ASSY STR SQ SN






TE Part # 2-647127-2
02P MTA156 SHRD HDR ASSY LF



TE Part # 643071-2
02P MTA156 FD-THRU COVER

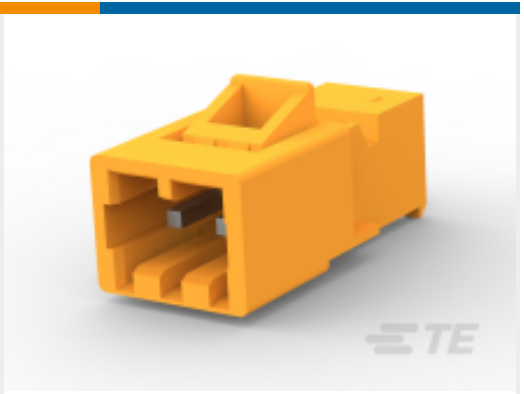

TE Part # 3-641435-2
02P MTA156 CONN ASSY ORNG



TE Part # 644751-2
02P MTA156 HDR ASSY R/A

Also in the Series | MTA 156



Connector Caps & Covers(89)




Connector Contacts(4)



Connector Hardware(2)




Insertion & Extraction Tools(1)

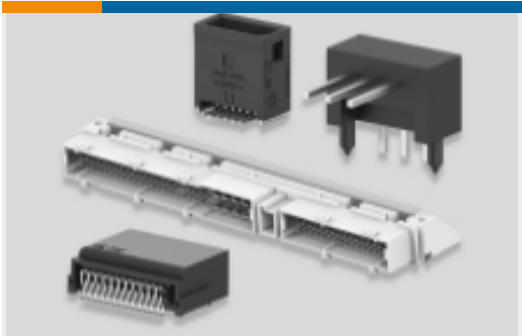

PCB Headers & Receptacles(317)



Rectangular Power Connectors(691)

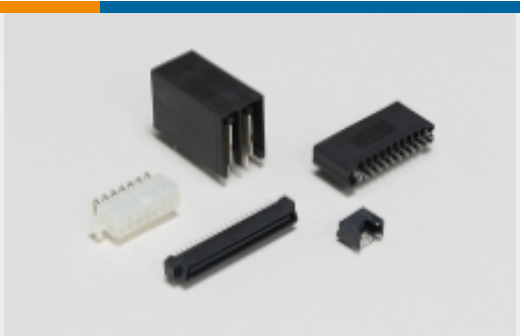


Standard Rectangular Connectors(336)

Customers Also Bought




TE Part #552274-1
ASSY, PLUG, 36 POS, B SLOT

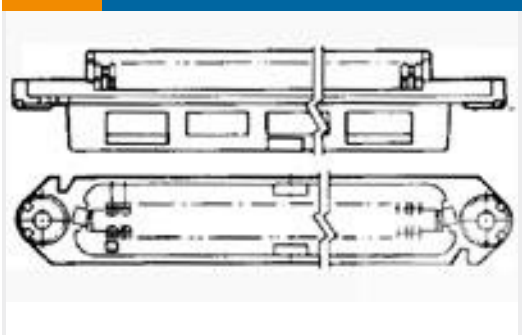


TE Part #552314-1
ASSY, RCPT, 36 POS, B SLOT



TE Part #3-640599-2
02P MTA156 CONN ASSY 18AWG ORA

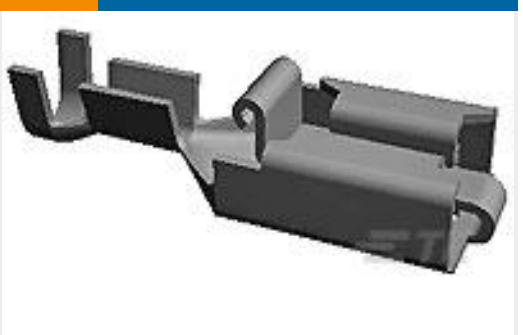


TE Part #160831-3
250 PL MKI REC. 17-13AWG TPBR

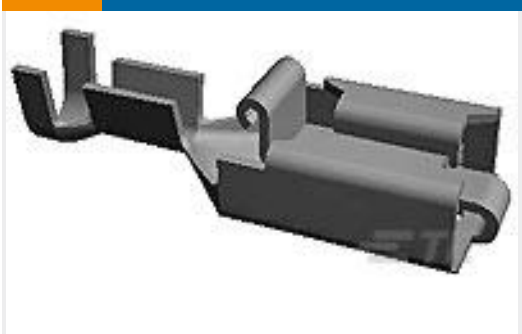

TE Part #790319-3
250 PL MKI REC. 12-10AWG PTBR



TE Part #1546670-3
3P .437" DR BARRIER,W/BND SCRWB

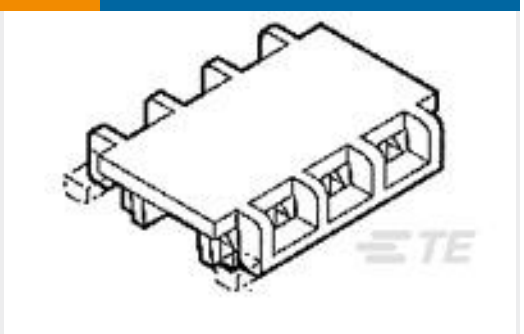

TE Part #643071-2
02P MTA156 FD-THRU COVER



TE Part #3-640601-4
04P MTA156 CONN ASSY 22AWG LF



Documents

Product Drawings

02P MTA156 CONN ASSY 22AWG LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-640601-2_R.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-640601-2_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-640601-2_R.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)

Japanese

Application Specification

English

Agency Approvals

UL

English