


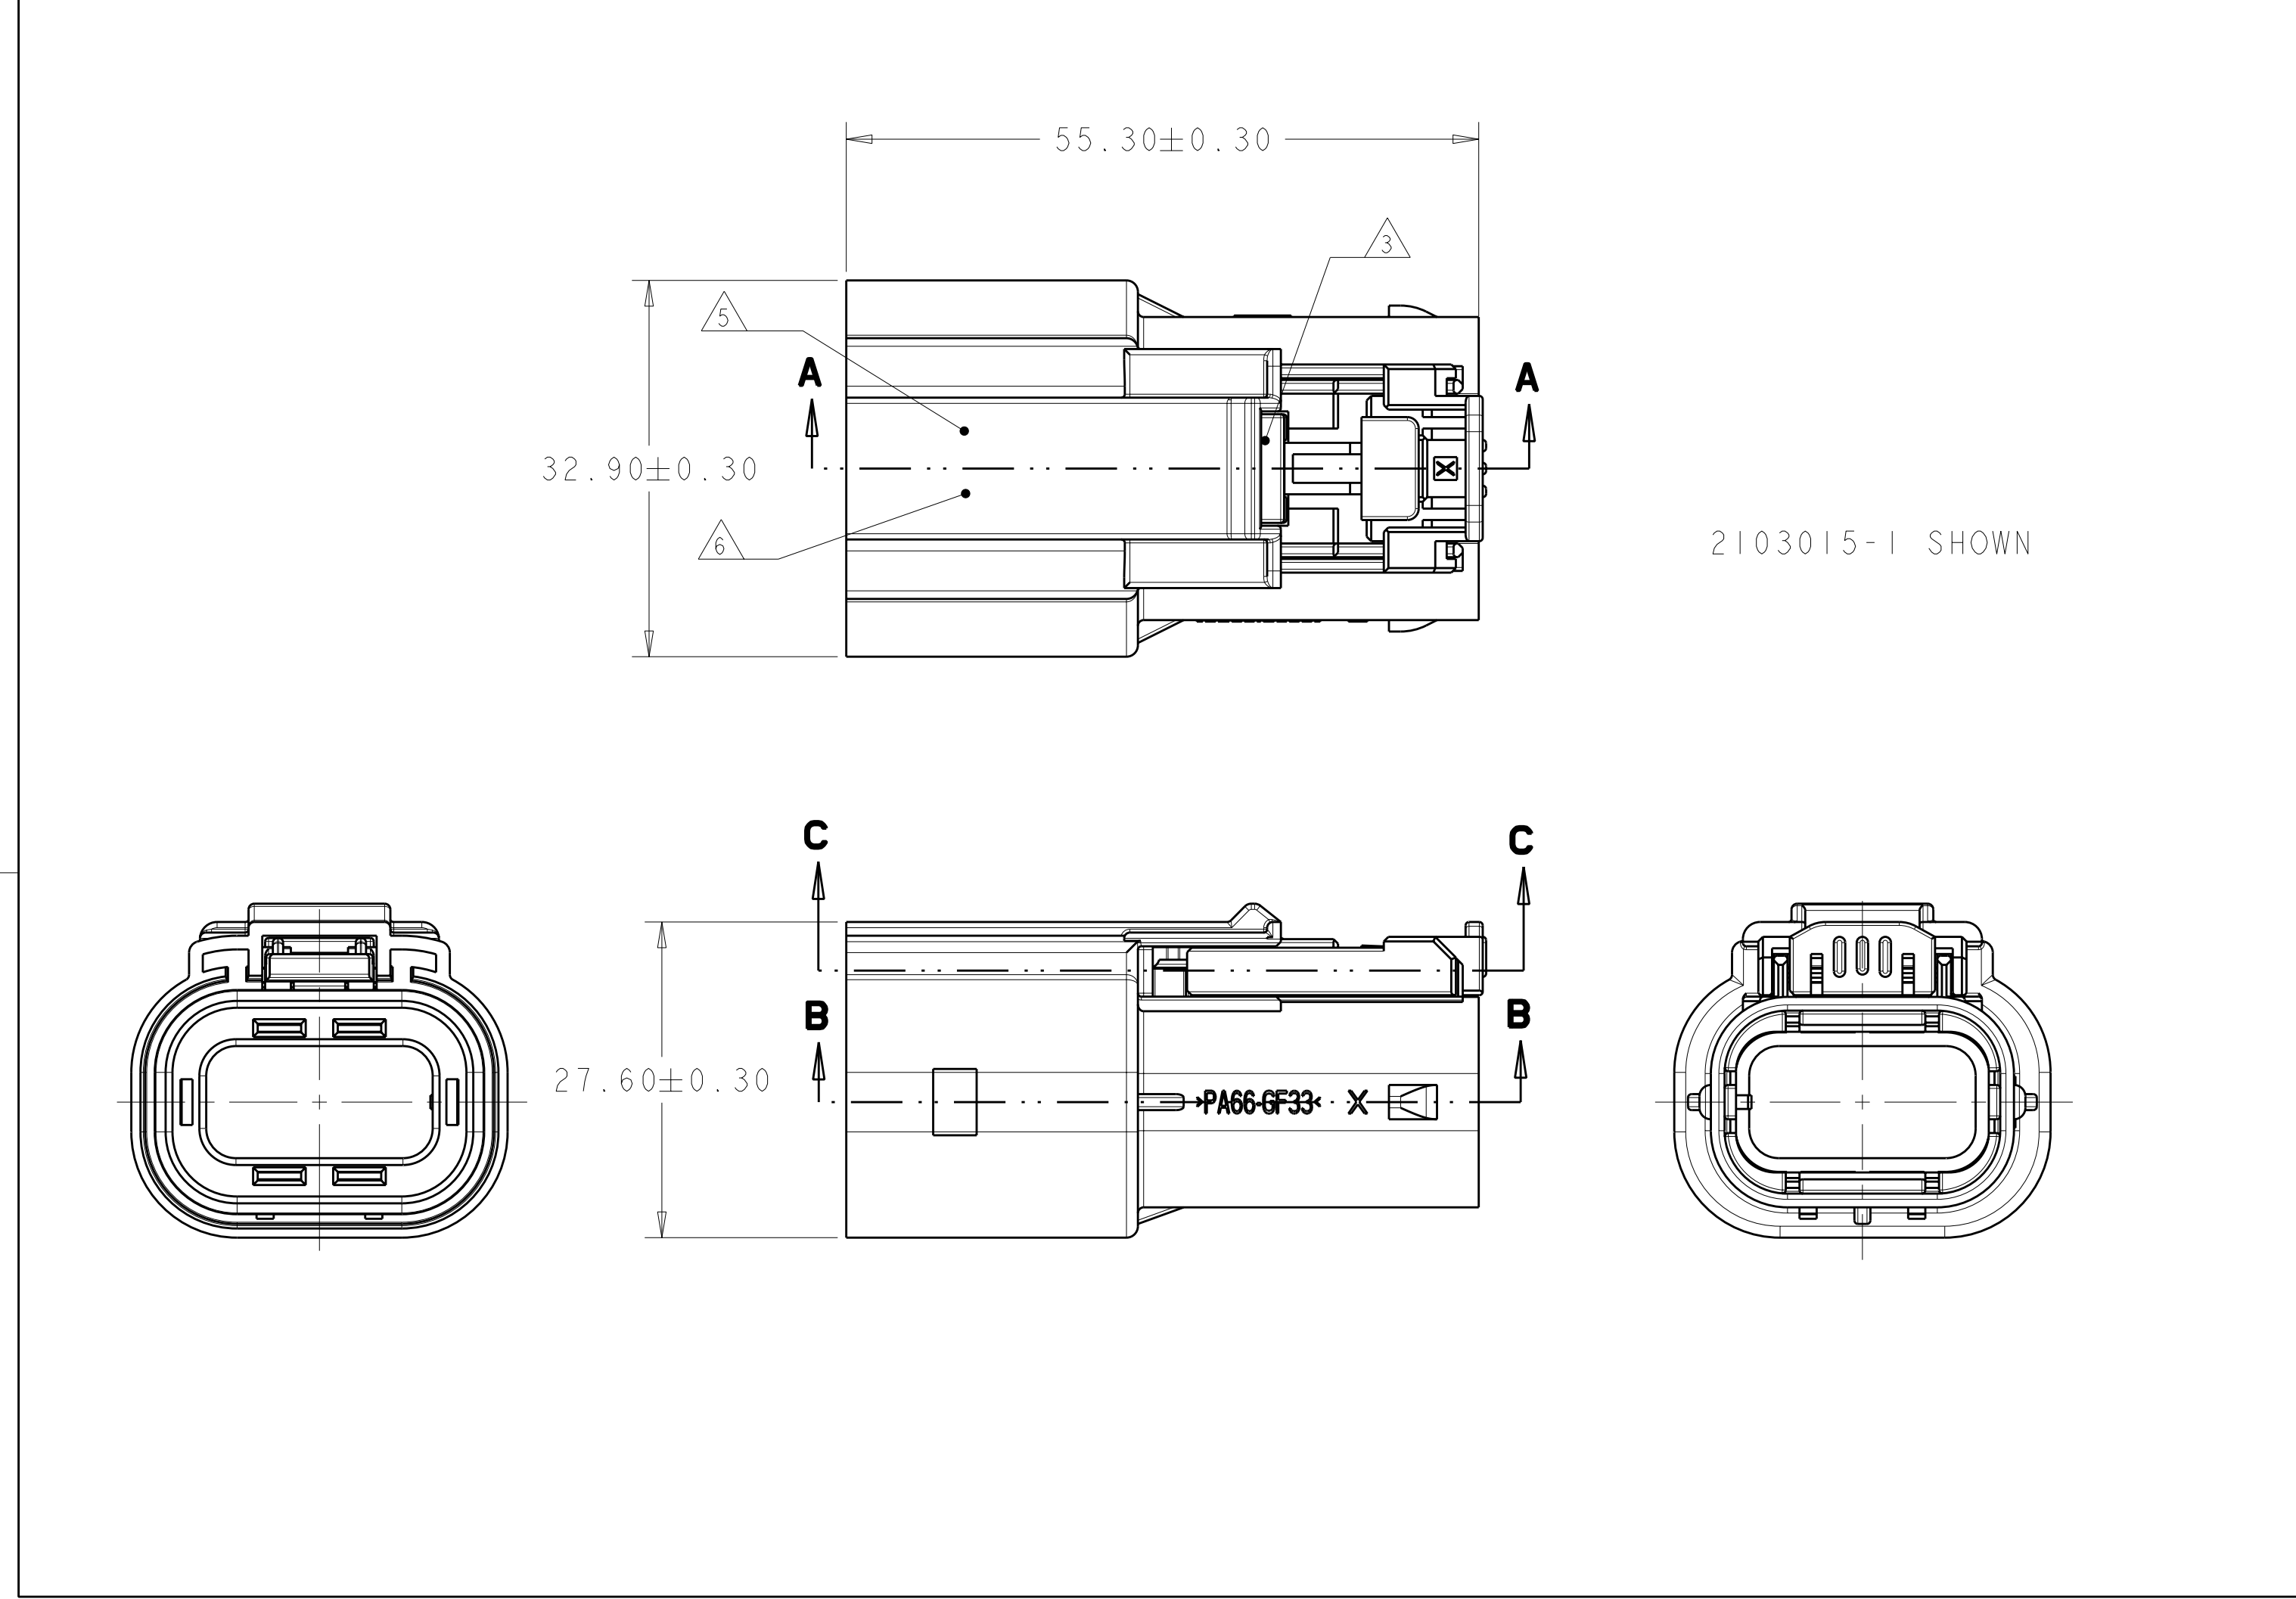
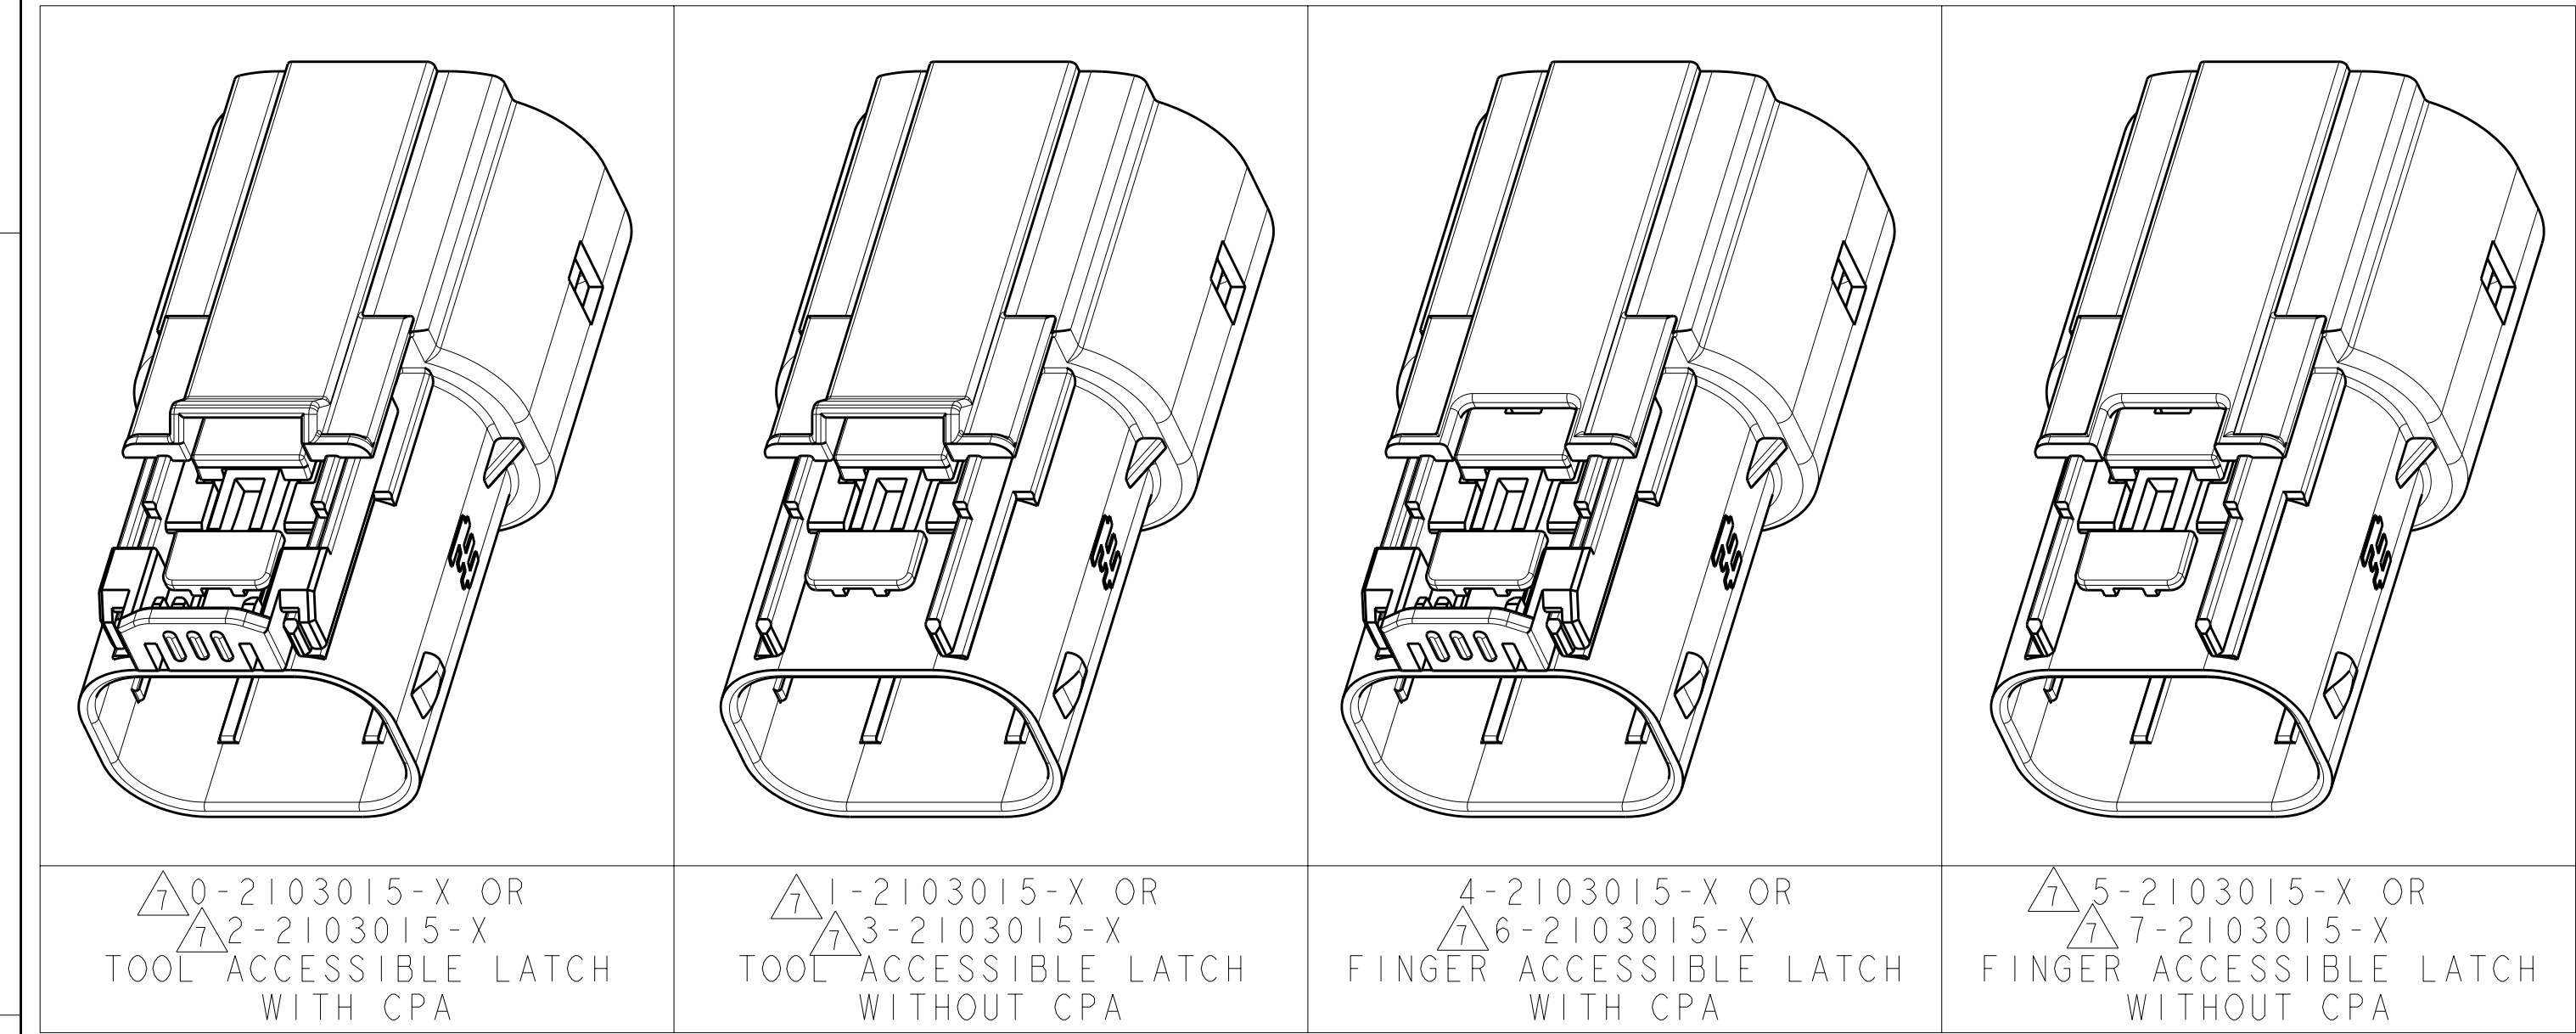


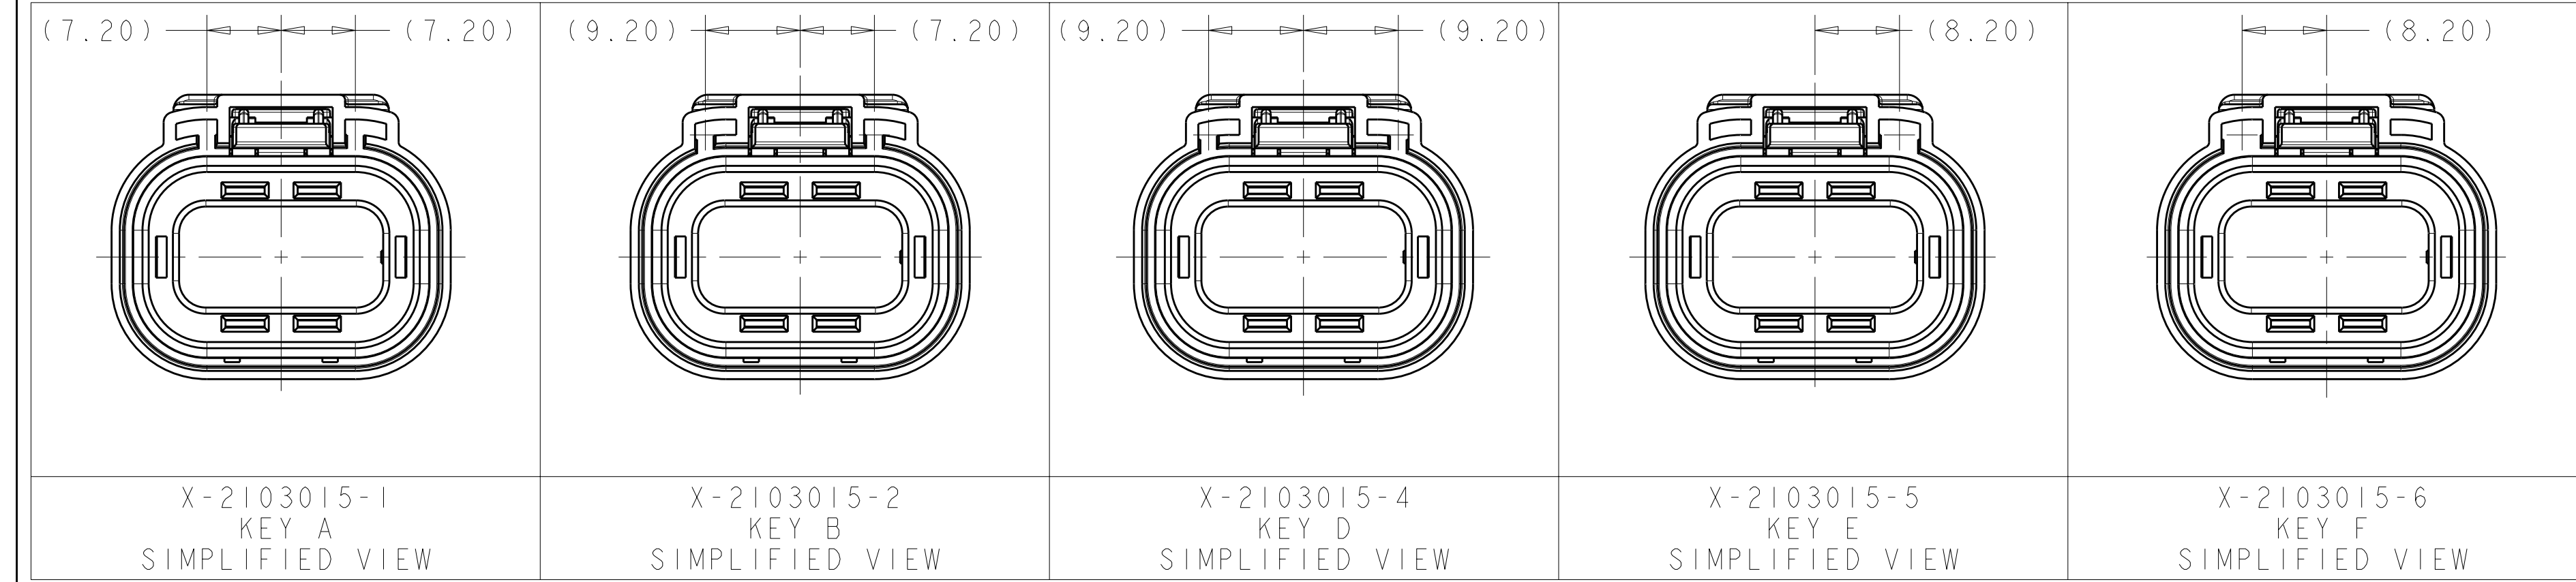


勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

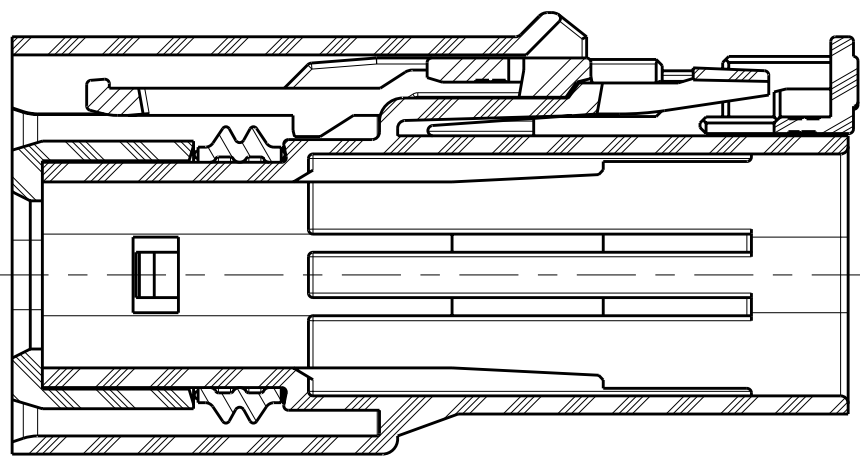

SECTION A-A

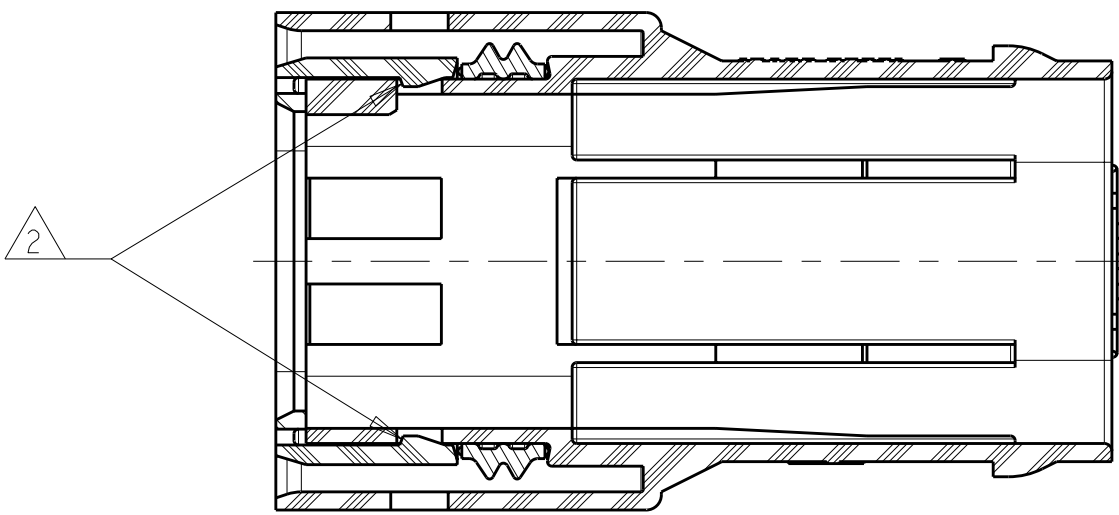


SECTION B-B

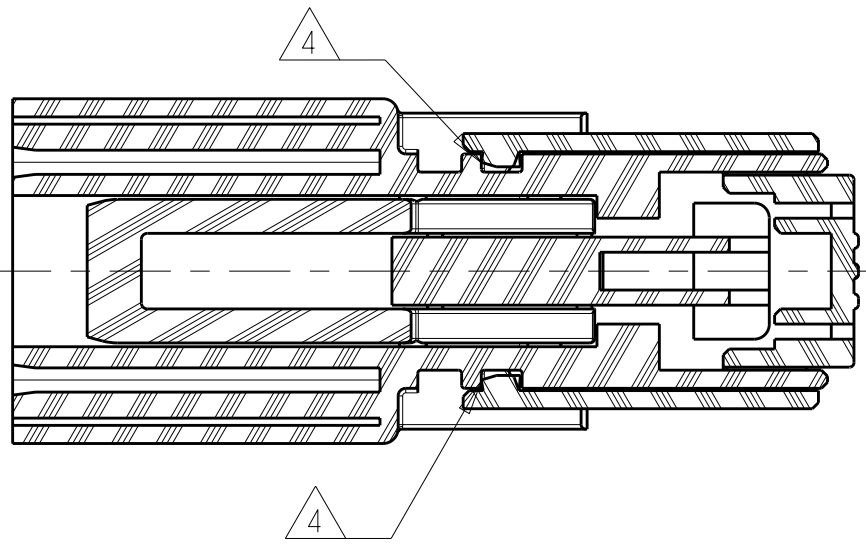

SECTION C-C

1. CONNECTOR MUST BE FREE OF ANY MECHANICAL DEFECTS WHICH COULD NEGATIVELY AFFECT FIT, FUNCTION, OR PERFORMANCE
- 2 PERIPHERAL SEAL RETAINER MUST BE FULLY LOCKED IN TWO LOCATIONS INTO OUTER HOUSING
- 3 FLOATING LATCH MUST INSTALLED AS SHOWN
- 4 ON APPLICABLE ASSEMBLIES CPA MUST INSTALLED IN PRE-STAGE POSITION AS SHOWN
- 5 JULIAN DATE CODE IN THIS LOCATION AT ASSEMBLY
- 6 TE PART NUMBER IN THIS LOCATION AT ASSEMBLY
- 7 PRELIMINARY PART—NOT RELEASED FOR PRODUCTION

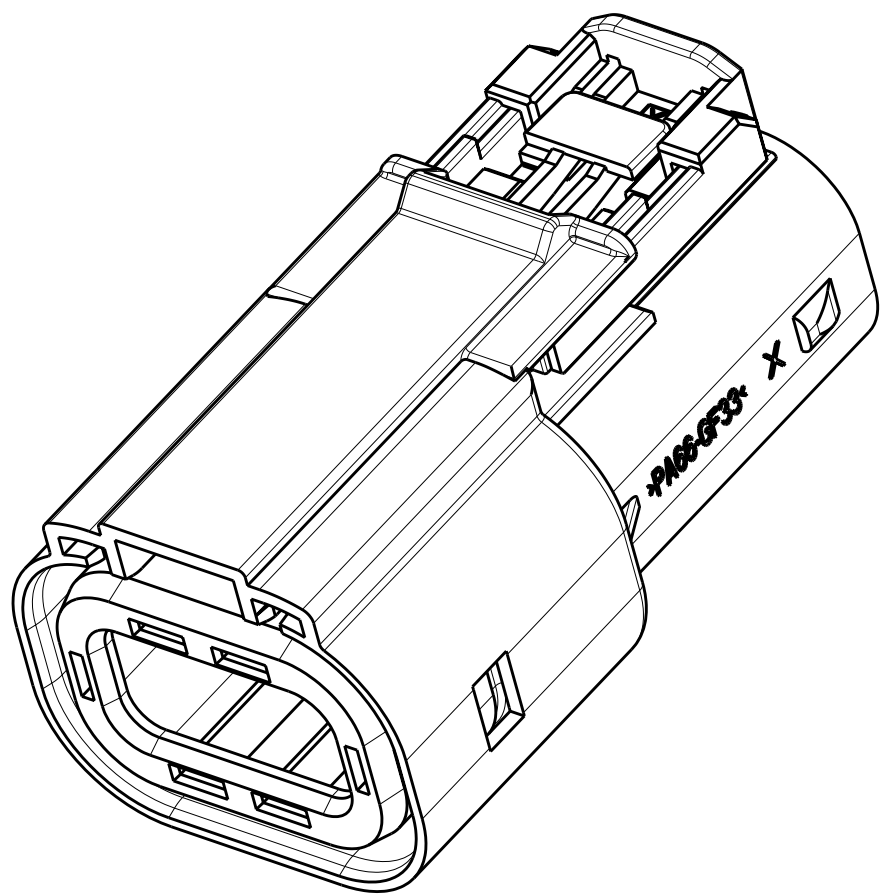

PLUG SUB-ASSEMBLY, HVA280-2PHM, FINGER ACCESSIBLE, WITHOUT CPA, >FVMQ< SEAL	F	4	7	7-2103015-6
	E	4	7	7-2103015-5
	D	4	7	7-2103015-4
	B	4	7	7-2103015-2
	A	4	7	7-2103015-1
	F	4	7	6-2103015-6
PLUG SUB-ASSEMBLY, HVA280-2PHM, FINGER ACCESSIBLE, WITH CPA, >FVMQ< SEAL	E	4	7	6-2103015-5
	D	4	7	6-2103015-4
	B	4	7	6-2103015-2
	A	4	7	6-2103015-1
	F	4	7	5-2103015-6
	E	4	7	5-2103015-5
PLUG SUB-ASSEMBLY, HVA280-2PHM, FINGER ACCESSIBLE, WITHOUT CPA, >VMQ< SEAL	D	4	7	5-2103015-4
	B	4	7	5-2103015-2
	A	4	7	5-2103015-1
	F	A		4-2103015-6
	E	A		4-2103015-5
	D	A		4-2103015-4
PLUG SUB-ASSEMBLY, HVA280-2PHM, FINGER ACCESSIBLE, WITH CPA, >VMQ< SEAL	B	A		4-2103015-2
	A	A		4-2103015-1
PLUG SUB-ASSEMBLY, HVA280-2PHM, TOOL ACCESSIBLE, WITHOUT CPA, >FVMQ< SEAL	F	4	7	3-2103015-6
	E	4	7	3-2103015-5
	D	4	7	3-2103015-4
	B	4	7	3-2103015-2
	A	4	7	3-2103015-1
	F	4	7	2-2103015-6
PLUG SUB-ASSEMBLY, HVA280-2PHM, TOOL ACCESSIBLE, WITH CPA, >FVMQ< SEAL	E	4	7	2-2103015-5
	D	4	7	2-2103015-4
	B	4	7	2-2103015-2
	A	4	7	2-2103015-1
	F	4	7	1-2103015-6
	E	4	7	1-2103015-5
PLUG SUB-ASSEMBLY, HVA280-2PHM, TOOL ACCESSIBLE, WITHOUT CPA, >VMQ< SEAL	D	4	7	1-2103015-4
	B	4	7	1-2103015-2
	A	4	7	1-2103015-1
PLUG SUB-ASSEMBLY, HVA280-2PHM, TOOL ACCESSIBLE, WITH CPA, >VMQ< SEAL	F	4	7	2103015-6
	E	4	7	2103015-5
	D	4	7	2103015-4
	B	4	7	2103015-2
	A	4	7	2103015-1

DESCRIPTION		INDEX CODE	REV	PART NO	
PLUG SUB-ASSEMBLY, HVA280-2PHM					

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. RHEIN	22MAR2011	TE Connectivity	
DIMENSIONS:		CHK D. RHEIN	22MAR2011		
mm		APVD J. ROEWITZ	22MAR2011	NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		9 PLC ±0.2		APPLICATION SPEC	
MATERIAL SEE TABLE		1 PLC ±0.10		WEIGHT	
		3 PLC ±		15.7 g	
		4 PLC ±		CUSTOMER DRAWING	
		ANGLES FINISH		SCALE 2:1	
				SHEET 1 OF 1	
				REV A	



Connectors > Automotive Connectors > Automotive Housings



Connector System: **Wire-to-Board, Wire-to-Device**
Number of Positions: **2**
Connector & Housing Type: **Housing for Female Terminals**
Centerline (Pitch): **10.4 mm [.409 in]**
Sealable: **Yes**

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	850 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V, 500 V, 550 V, 600 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Orange
Connector & Keying Code	F

Contact Features

--	--



Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
Centerline (Pitch)	10.4 mm[.409 in]

Dimensions

Connector Height	27.6 mm[1.087 in]
Product Width	55.3 mm[2.177 in]
Product Length	32.9 mm[1.295 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Degree of Protection	IP6K9K
UL Flammability Rating	UL 94HB

Other

Serviceable	Yes
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1587723-2 INNER FERRULE, SIZE B, HVA280-	TE Part # 1587724-2 OUTER FERRULE, SIZE B, HVA280	TE Part # 2103013-1 CABLE SEAL RETAINER, SIZE 1, HVA280	TE Part # 1-2103157-2 SHIELD, PLUG, SIZE 2, Ag, HVA280
TE Part # 1587724-3 OUTER FERRULE, SIZE C, HVA280	TE Part # 1587985-1 INNER HSG SUBASSY, HVA280-2PHM	TE Part # 1587723-3 INNER FERRULE, SIZE C, HVA280	TE Part # 1587724-1 OUTER FERRULE, SIZE A, HVA280

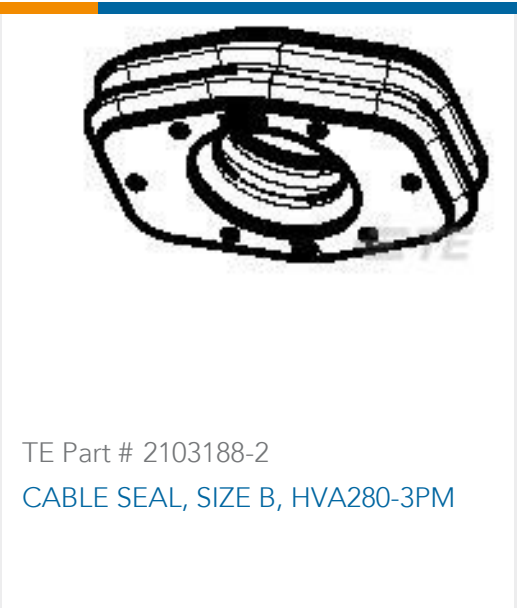

 TE Part # 1587723-1 INNER FERRULE, SIZE A, HVA280	 TE Part # 2103157-1 SHIELD, PLUG, SIZE 1, Sn, HVA280	 TE Part # 2103306-1 INNER HOUSING, PLUG, HVA280-3PXM, XE	 TE Part # 2103188-2 CABLE SEAL, SIZE B, HVA280-3PM
 TE Part # 1587977-2 INNER HOUSING, PLUG, HVA280-2PHM, PASS T	 TE Part # 2103154-2 CABLE SEAL, SIZE 2, HVA280	 TE Part # 2103153-1 SPACER, HVA280-2PHM	 TE Part # 2103154-1 CABLE SEAL, SIZE 1, HVA280
 TE Part # 2103155-1 COLLET, SIZE 1, HVA280	 TE Part # 1-2103157-1 SHIELD, PLUG, SIZE 1, Ag, HVA280	 TE Part # 2103013-2 CABLE SEAL RETAINER, SIZE 2, BK, HVA280	 TE Part # 2103013-3 CABLE SEAL RETAINER, SIZE 2, OR, HVA280


Also in the Series

HVA 280

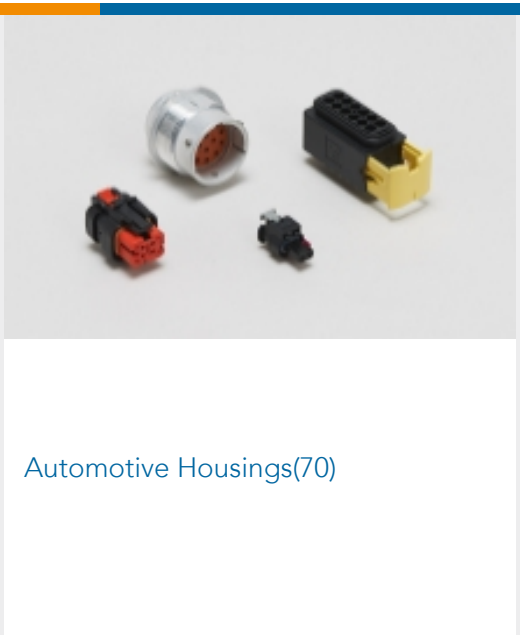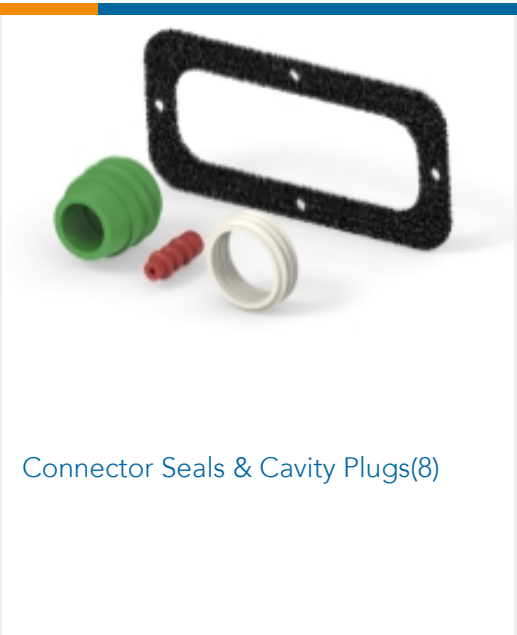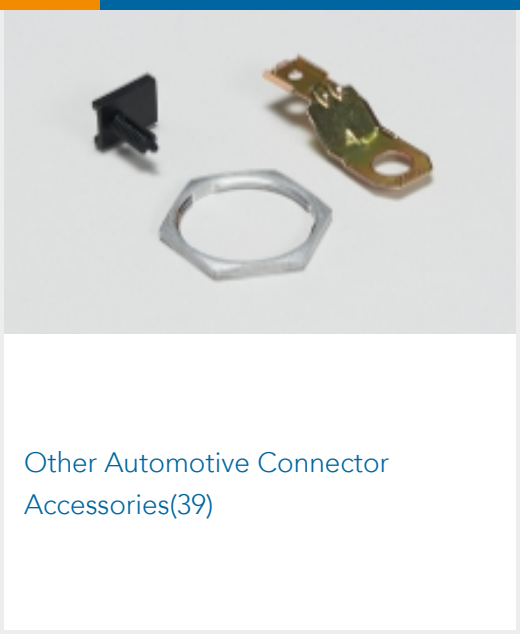 Automotive Connector Caps & Covers (5)	 Automotive Connector EMC Shielding (15)	 Automotive Housings(70)	 Connector Seals & Cavity Plugs(8)
 Electric, Hybrid & Fuel Cell Cable Assemblies(6)	 High Voltage Wire Processing Equipment(7)	 Other Automotive Connector Accessories(39)	 PCB Headers & Receptacles(37)

Customers Also Bought

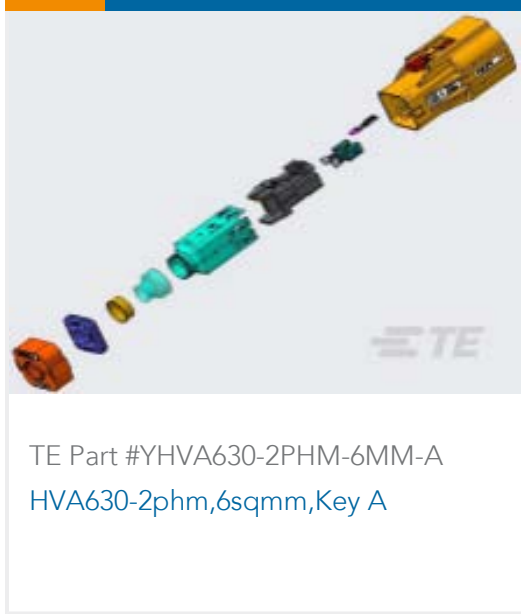

 TE Part #1587828-3 INNER FERRULE, SIZE C, HVA280-2PI	 TE Part #1587985-1 INNER HSG SUBASSY, HVA280-2PHM	 TE Part #1587723-3 INNER FERRULE, SIZE C, HVA280	 TE Part #4-2103015-5 PLUG SUBASSY, E, HVA280-2PHM F
 TE Part #4-2103015-2 PLUG SUBASSY, B, HVA280-2PHM F	 TE Part #4-2103015-4 PLUG SUBASSY, D, HVA280-2PHM F	 TE Part #2103157-1 SHIELD, PLUG, SIZE 1, Sn, HVA280	 TE Part #2103153-1 SPACER, HVA280-2PHM
 TE Part #2141256-1 2POS,AMP MCP6.3/4.8K,REC HSG, ASSY	 TE Part #YHVA630-2PHM-6MM-A HVA630-2phm,6sqmm,Key A		

Documents

Product Drawings

PLUG SUBASSY, F, HVA280-2PHM F

English

PLUG SUBASSY, F, HVA280-2PHM F

English

CAD Files

Customer View Model

ENG_CVM_CVM_4-2103015-6_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-2103015-6_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-2103015-6_A.3d_stp.zip

English

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

By downloading the CAD file I accept and agree to the Terms and Conditions of use.