

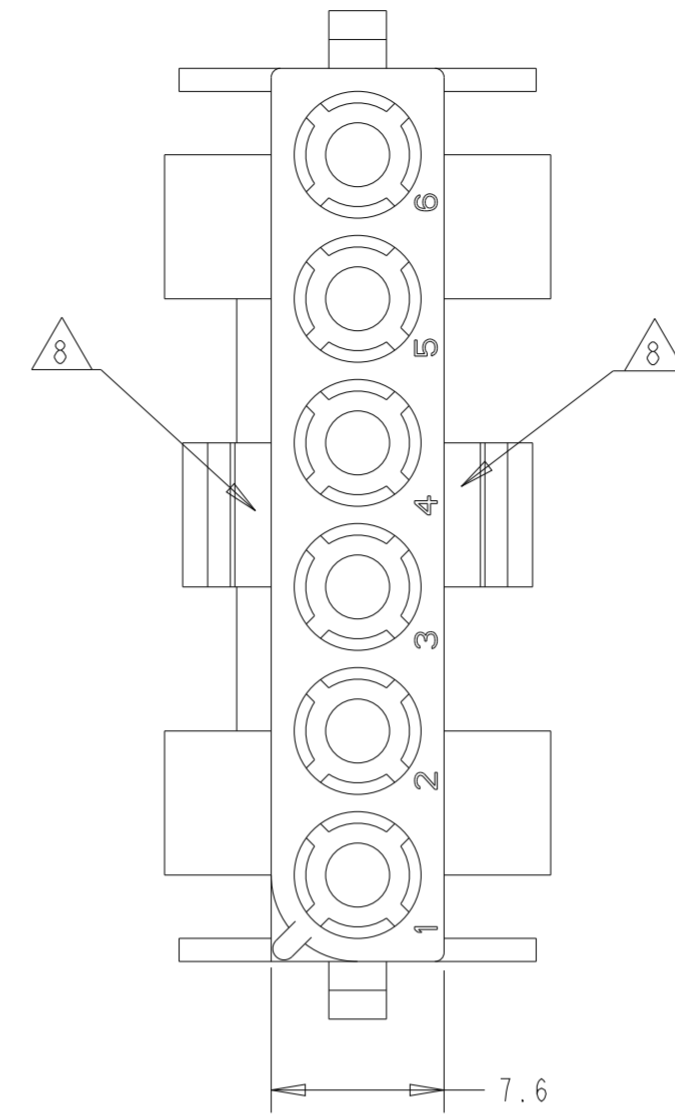
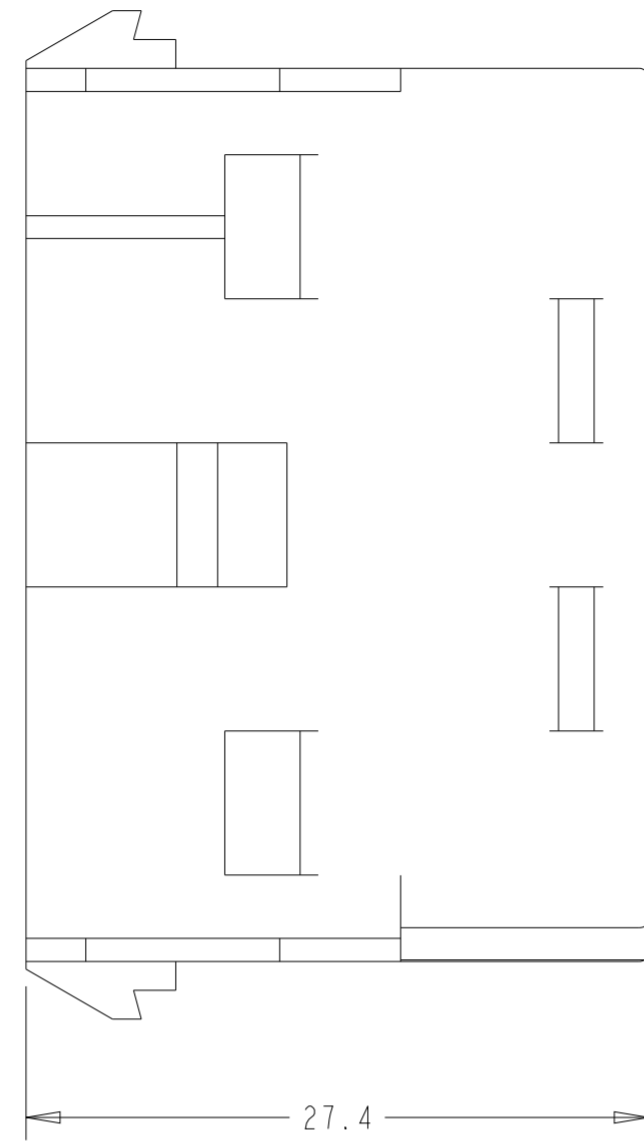
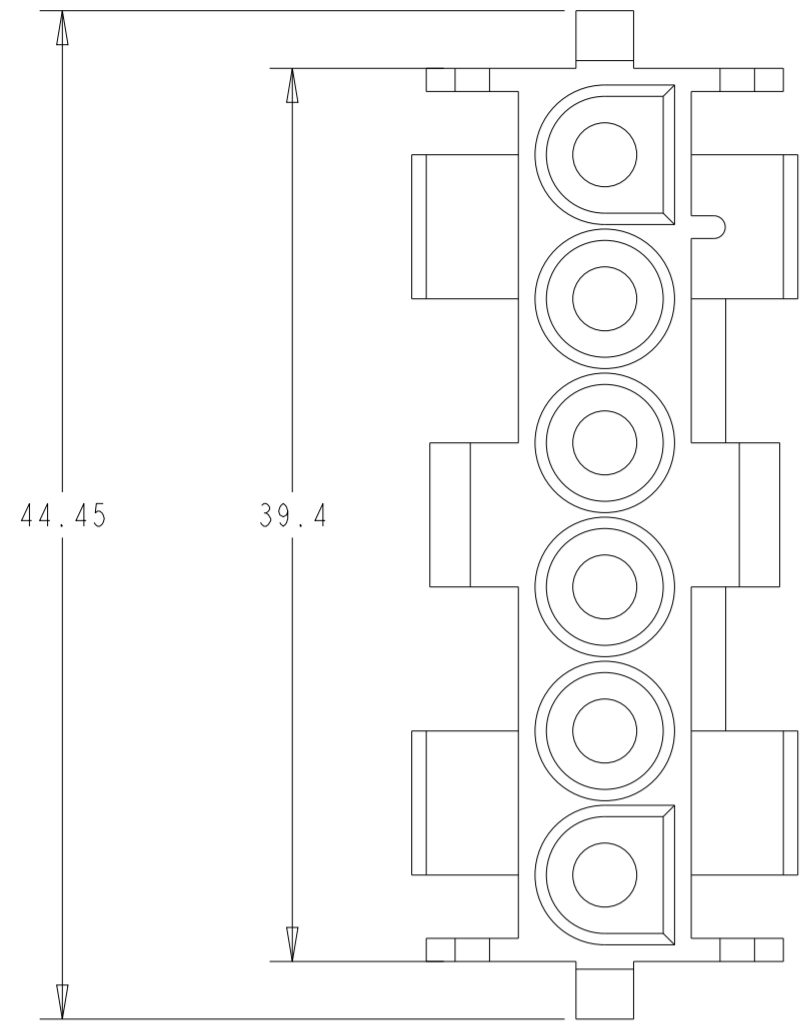


P	LTR	DESCRIPTION	DATE	DWN	APVD
G4		REVISED PER ECN-22-153644	12MAY2022	WLS	VS

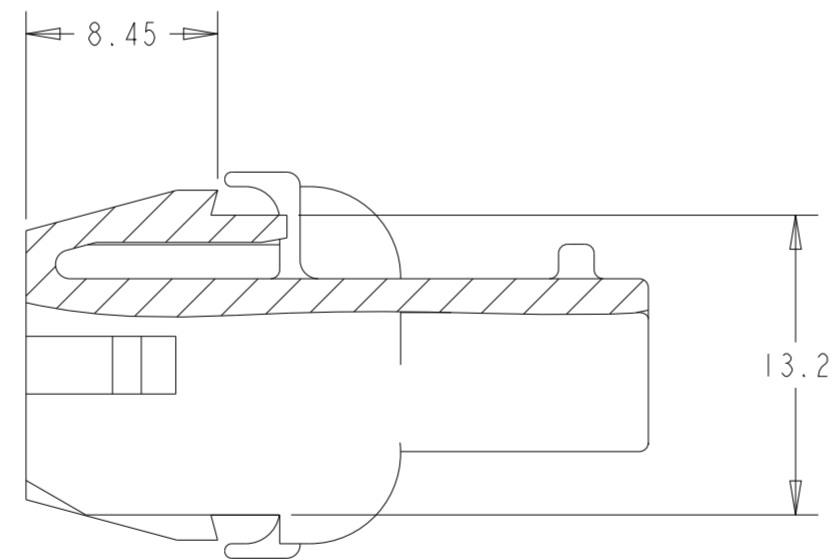

- 1 SUITABLE FOR UMNL PIN AND SOCKET CONTACTS.
- 2 MATCHES WITH UMNL PLUG HOUSING PN 926300, 640581 AND 640585.
- 3 RECOMMENDED SHEET METAL THICKNESS FROM 0.75 TO 2.30 mm.
- 4 HOUSING MUST BE INSERTED TO PUNCHING DIRECTION.
- 5 FOR POLARIZED USING OF THE HOUSINGS.
- 6 POSITION OF THE WAY 1 FOR POLARIZED USING.
- 7 PHOSPHOR AND HALOGENOUS FREE.
- 8 CSA CERTIFICATION LOGO LOCATED ONCE ON ANY INDICATED SURFACE APPROXIMATELY AS SHOWN.
- 9 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

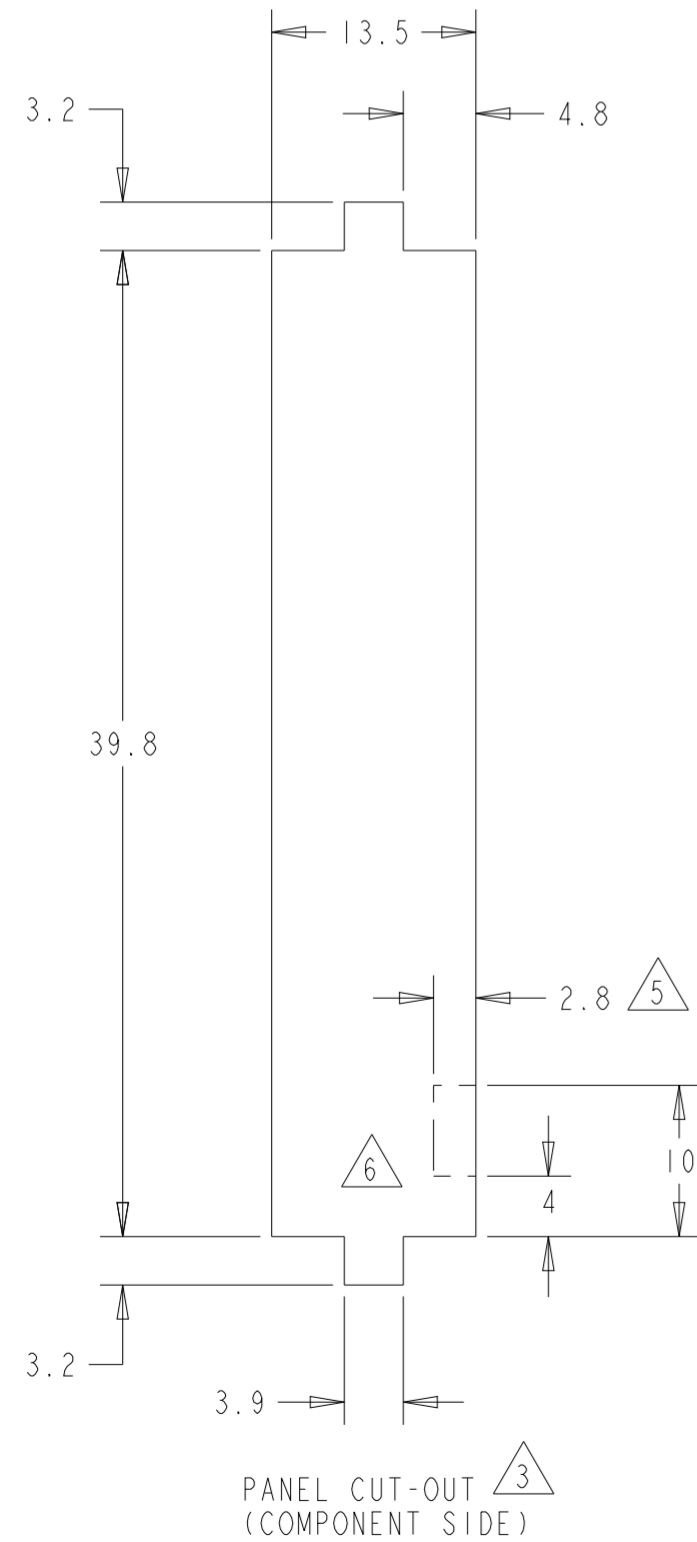

SECTION C-C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OBSOLETE	PA6.6 UL94 V-0	926307-4
	PA6.6 UL94 V0 NATURAL Δ	926307-3
OBSOLETE	PA6.6 UL94 V-0	926307-2
	PA6.6 UL94 V2 NATURAL	926307-1
	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN PADMAJA J 06APR2022	STE TE Connectivity	
		CHK STEFANI 07APR2022		
DIMENSIONS: mm		APVD RICK 07APR2022	NAME UMNL 6 WAY CAP HOUSING	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-1031	SIZE A2	
MATERIAL REFER TABLE		APPLICATION SPEC 114-1010	CAGE CODE 00779	DRAWING NO G-926307
		WEIGHT -	RESTRICTED TO -	
		CUSTOMER DRAWING	SCALE 3:1	SHEET 1 OF 1
			REV G4	