






LOC	DIST	REV	DESCRIPTION	DATE	BY	APPV
A1	-	B5	ECR-15-012070	15AUG2015	JJM	BK
		B6	ECR-15-017291	08DEC2015	JJM	JP
		B7	SERRATION VIEW'S ARE ADDED	19MAY2017	JJM	JP
		B8	ADDED REFERENCE TO SMT CRIMP HEIGHT	12JAN2018	JP	JP

VERSION A (UNSEALED / ungedichtet)

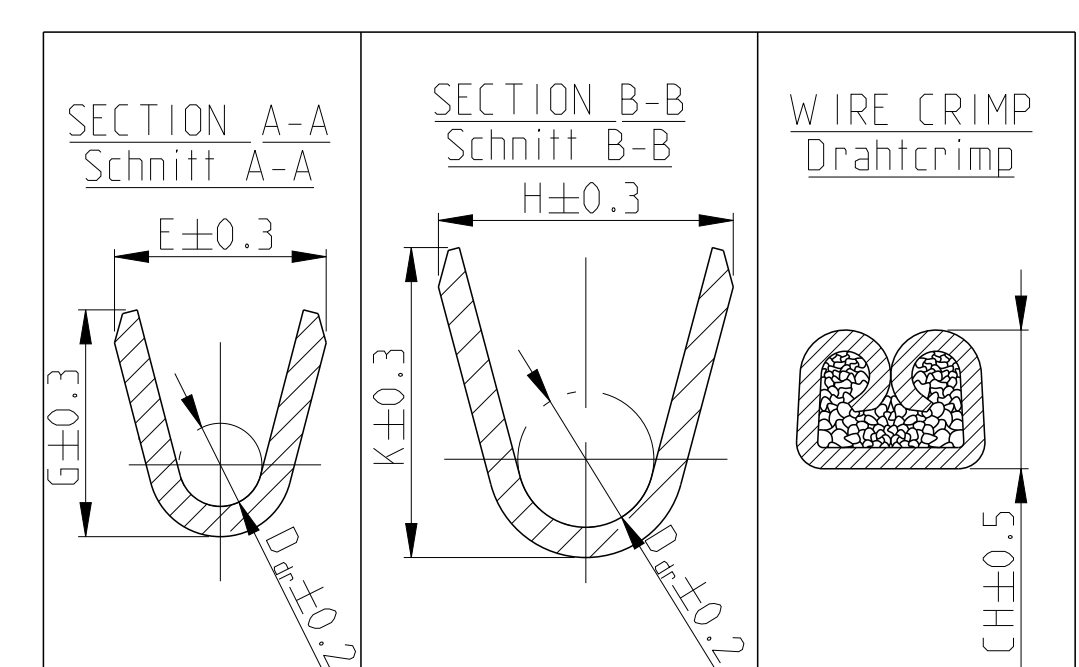

TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	MATERIAL	SURFACE	TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	MATERIAL	SURFACE	TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	MATERIAL	SURFACE	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	927839-2	C	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	927839-1	C	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927827-2	C	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927827-1	C	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927833-5	D	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927833-2	D	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927833-1	D	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
927824-2	C	-	-	-	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
927824-1	C	-	-	-	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
963709-5	C	-	-	-	-	-	-	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
963709-2	C	-	-	-	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
963709-1	C	-	-	-	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
1241818-5	B	-	-	-	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
1241818-1	B	-	-	-	-	-	-	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	927840-5	C	-	-	-	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	927840-4	C	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	927840-2	C	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	927840-1	C	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	1-927831-5	C	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	-	-	-	927831-5	C	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	-	-	-	927831-4	C	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	927831-2	C	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927831-1	C	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	1-927837-5	D	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	-	-	-	927837-6	D	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	-	-	-	927837-5	D	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
-	-	-	-	-	-	927837-4	D	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927837-2	D	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
-	-	-	-	-	-	927837-1	D	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-
1-927829-5	D	-	-	-	-	-	-	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
927829-5	D	-	-	-	-	-	-	-	-	-	CuFe2	vorversilbert PRESILVERED	-	-	-	-	-	-
927829-2	D	-	-	-	-	-	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-	-
927829-1	D	-	-	-	-	-	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-	-



DBS WIRE RANGE (mm²)	WIRE CRIMP DRÄHTCRIMP	CRIMP DIMENSIONS (mm) Crimpabmessungen (mm)	EXTRACTION TOOL Ausdrückwerkzeug Nr.: 226503-1	TE CONNECTIVITY ORDER - No.
0.2 - 0.5 FLK	E = 2.2 G = 2.2 D _b = 0.8	H = 3.7 K = 3.8 D _b = 2.0	0.20mm² = 1.13 0.25mm² = 1.15 0.35mm² = 1.19 0.50mm² = 1.26	MQC- Applicator 878426-2 539635-1 WITH DIE: mit Matrize 539744-2
0.5 - 1.0 FLK	E = 2.8 G = 3.0 D _b = 1.1	H = 4.5 K = 4.7 D _b = 2.4	0.5mm² = 1.38 0.75mm² = 1.47 1.0mm² = 1.56	MQC- Applicator 2-541689-2 539733-2 WITH DIE: mit Matrize 734269-0
>1.0 - 2.5 FLK	E = 3.8 G = 4.1 D _b = 1.6	H = 5.7 K = 5.8 D _b = 3.6	1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878367-2 539635-1 WITH DIE: mit Matrize 539733-2
>2.5 - 4.0 FLK	E = 4.6 G = 4.8 D _b = 2.4	H = 6.3 K = 6.6 D _b = 4.0	3.0mm² = 2.13 3.5mm² = 2.24 4.0mm² = 2.35	MQC- Applicator 2-878314-2 539635-1 WITH DIE: mit Matrize 539734-2
4.0 - 6.0 FLK	E = 5.2 G = 5.5 D _b = 2.9	H = 7.3 K = 7.6 D _b = 4.5	4.0mm² = 2.17 5.0mm² = 2.36 6.0mm² = 2.55	MQC- Applicator 2-878738-2
0.2 - 0.5 FLR	E = 2.2 G = 2.2 D _b = 0.8	H = 2.8 K = 2.8 D _b = 1.4	0.2mm² = 1.13 0.35mm² = 1.19 0.5mm² = 1.26	MQC- Applicator 878427-2
0.5 - 1.0 FLR	E = 2.8 G = 3.0 D _b = 1.1	H = 3.9 K = 4.1 D _b = 1.8	0.5mm² = 1.43 0.75mm² = 1.52 1.0mm² = 1.61	MQC- Applicator 878328-2 169400-0 WITH DIE: mit Matrize 734781-1
>1.0 - 2.5 FLR	E = 3.8 G = 4.1 D _b = 1.6	H = 4.8 K = 4.9 D _b = 2.6	1.25mm² = 1.69 1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878356-2 169400-0 WITH DIE: mit Matrize 734251-0
>2.5 - 4.0 FLR	E = 4.6 G = 4.8 D _b = 2.4	H = 5.5 K = 5.7 D _b = 3.3	3.0mm² = 2.13 3.5mm² = 2.24 4.0mm² = 2.35	MQC- Applicator 2-878384-2 169400-0 WITH DIE: mit Matrize 734251-0

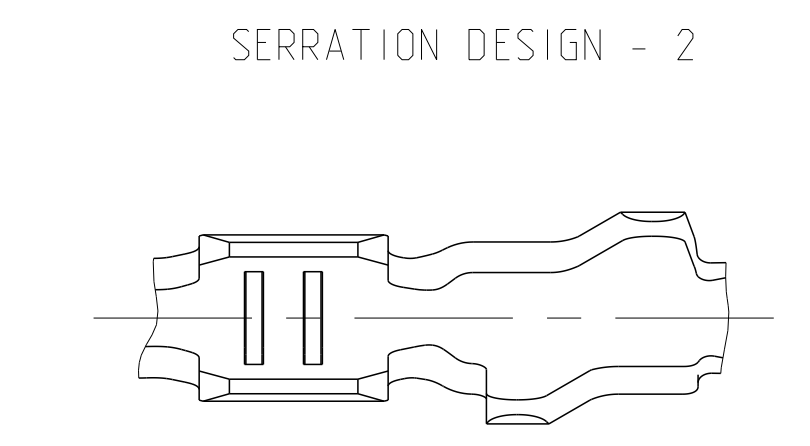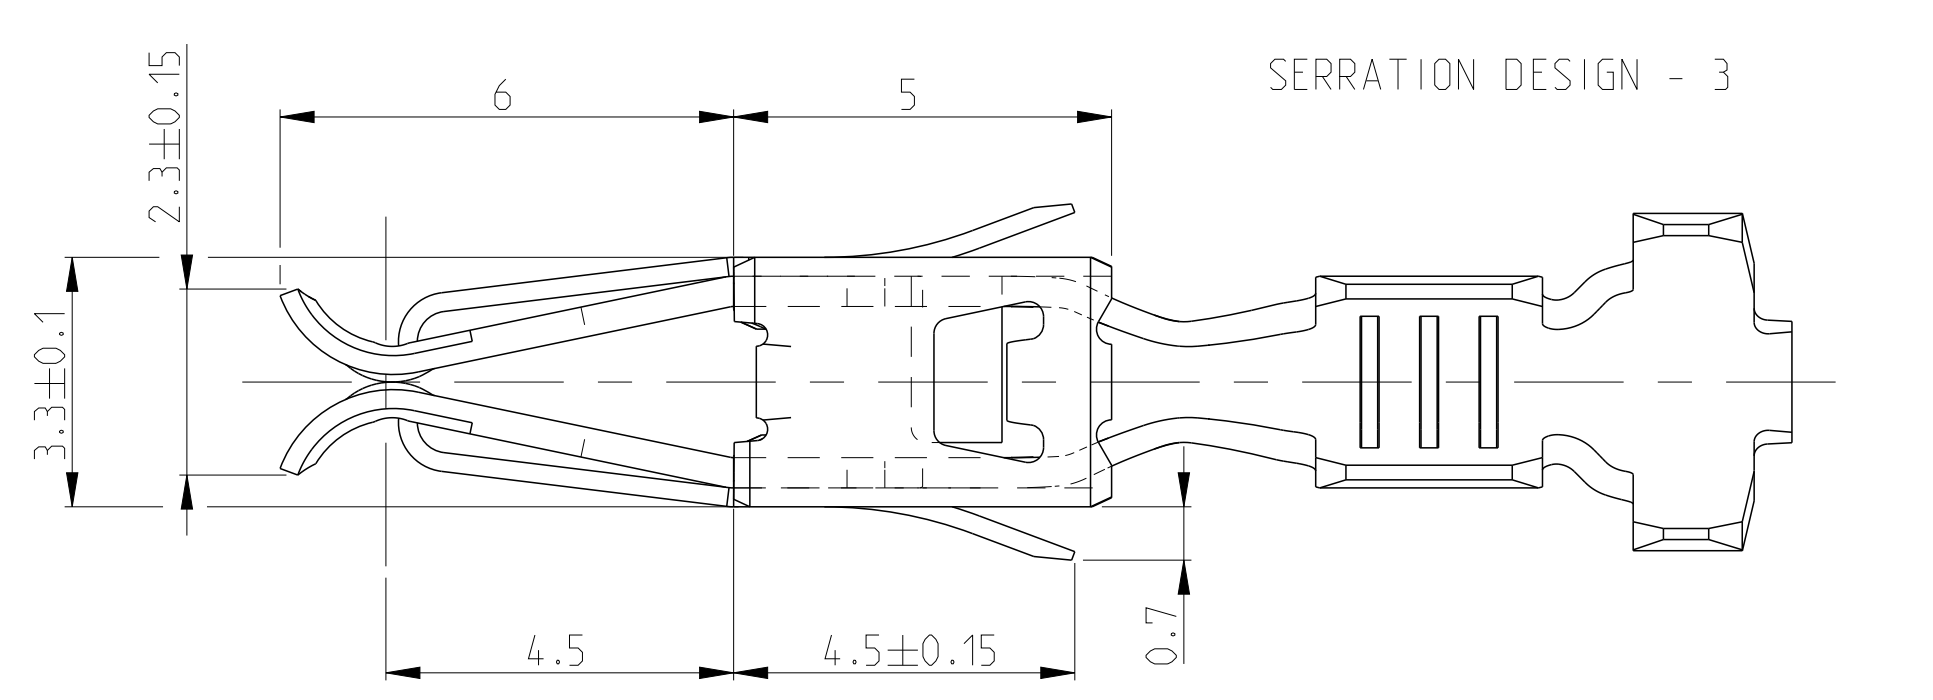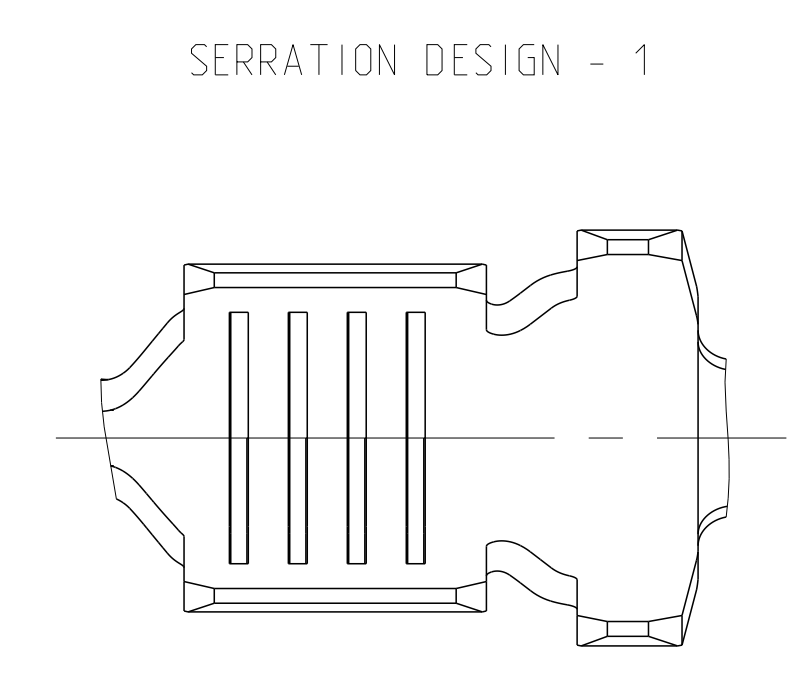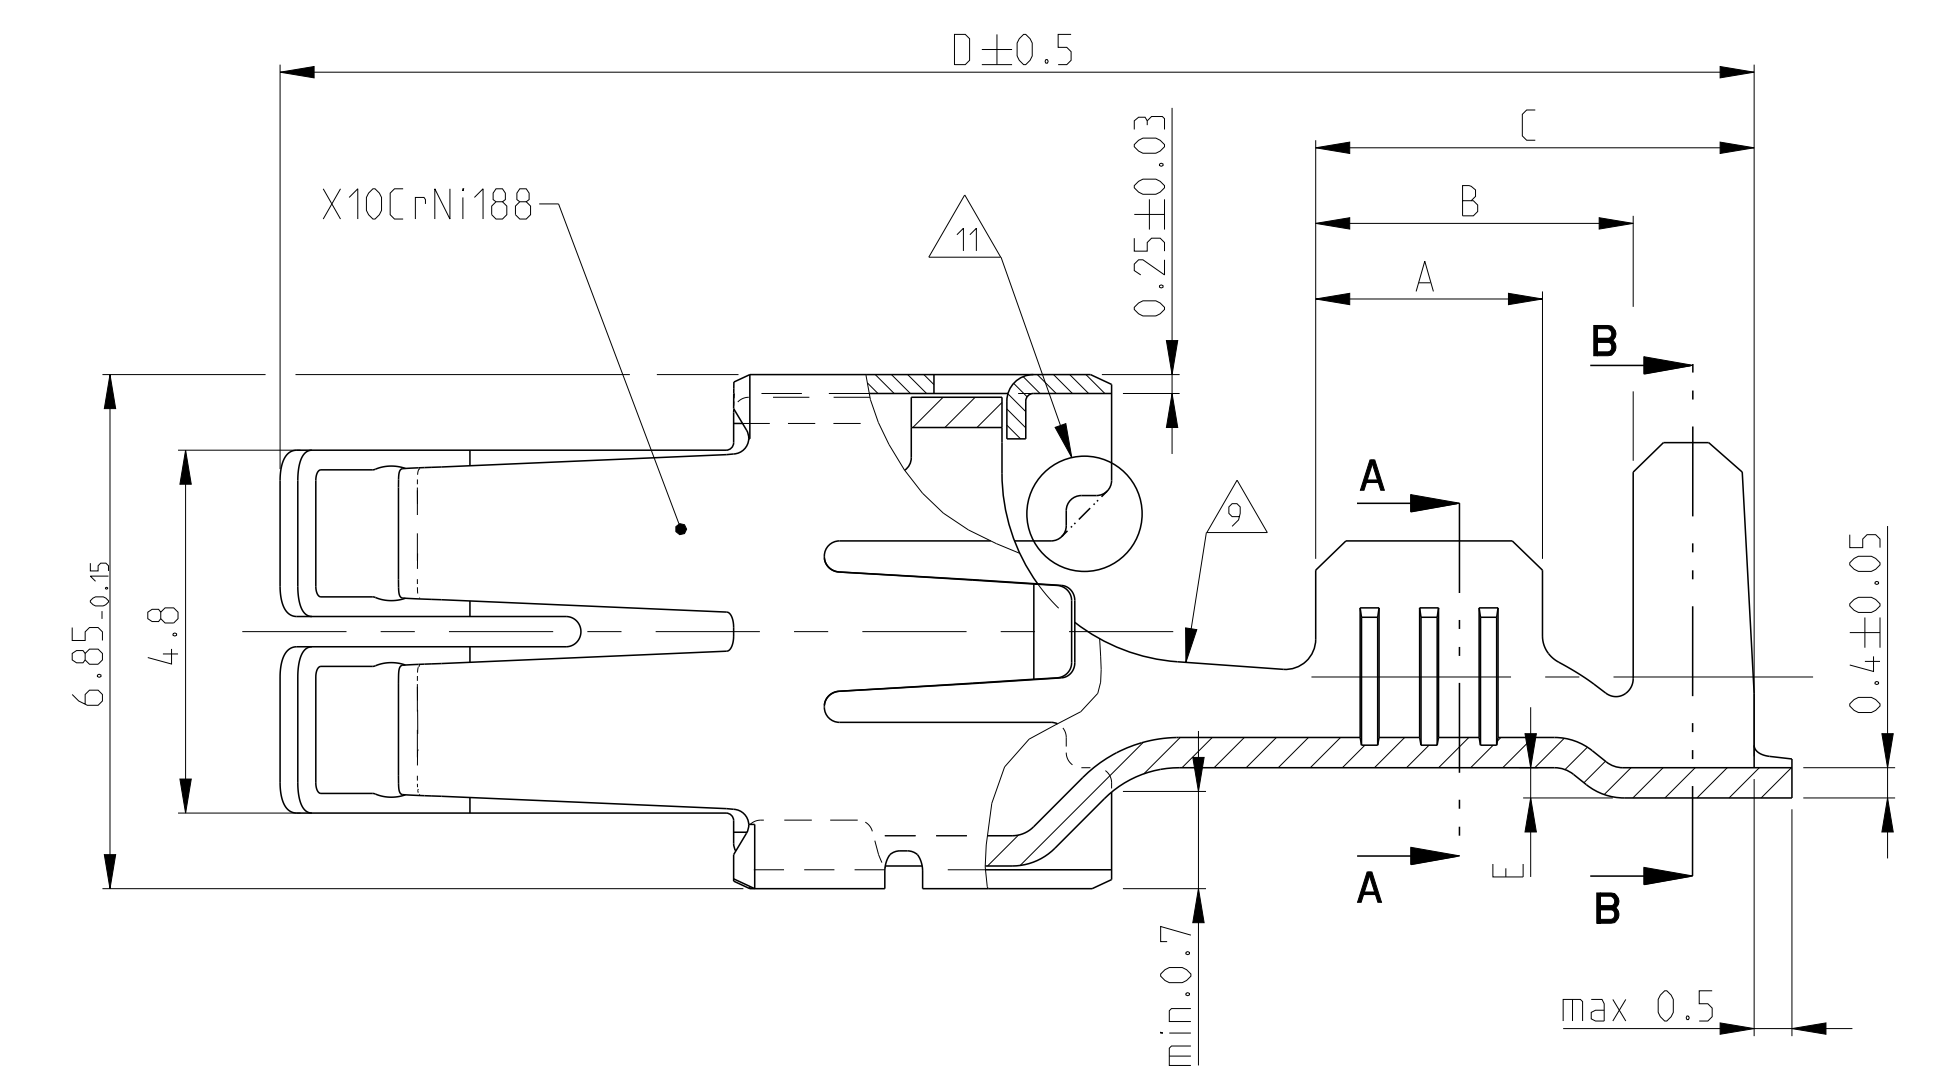


VERSION B (SINGLE WIRE SEAL / Einzel-Dichtungs-System)

TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	MATERIAL	SURFACE	TE CONNECTIVITY ORDER - NO	STRIP FORM BANDWARE	REV	MATERIAL	SURFACE
-	-	-	2-927836-2	C	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	927836-2	C	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	927836-1	C	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	2-927835-2	C	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	2-927835-1	C	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	1-927835-3	C	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	927835-2	C	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	927835-1	C	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-
2-928966-2	D	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
2-928966-1	D	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
1-928966-3	D	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
928966-2	D	-	-	-	-	CuSn4	vorverzinkt PRETINNED	-	-	-	-	-
928966-1	D	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-
1241962-1	B	-	-	-	-	CuFe2	vorverzinkt PRETINNED	-	-	-	-	-

DBS WIRE RANGE (mm²)	WIRE CRIMP DRÄHTCRIMP	CRIMP DIMENSIONS (mm) Crimpabmessungen (mm)	EXTRACTION TOOL Ausdrückwerkzeug Nr.: 226503-1	TE CONNECTIVITY ORDER - No.
0.5 - 1.0 FLR	E = 2.8 G = 3.0 D _b = 1.1	H = 7.6 K = 7.7 D _b = 5.6	0.5mm² = 1.43 0.75mm² = 1.52 1.0mm² = 1.61	MQC- Applicator 878337-2 539635-1 WITH DIE: mit Matrize 739736-2
>1.0 - 2.5 FLR	E = 3.8 G = 4.1 D _b = 1.6	H = 7.6 K = 7.7 D _b = 5.6	1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878338-2 539635-1 WITH DIE: mit Matrize 539736-2
>2.5 - 4.0 FLR	E = 4.6 G = 4.8 D _b = 2.4	H = 7.6 K = 7.7 D _b = 5.6	3.0mm² = 2.13 4.0mm² = 2.35	MQC- Applicator 878441-2 539635-1 WITH DIE: mit Matrize 539736-2
>3.0 - 5.0 FLR	E = 4.8 G = 5.2 D _b = 2.5	H = 8.15 K = 7.8 D _b = 6.0	3.0mm² = 2.25 4.0mm² = 2.50 5.0mm² = 2.75	MQC- Applicator 539635-1 WITH DIE: mit Matrize

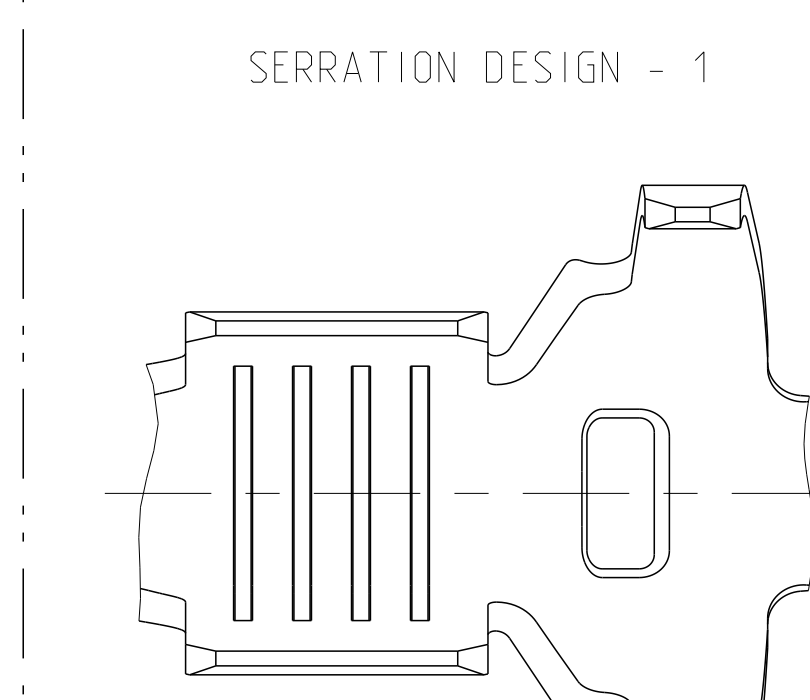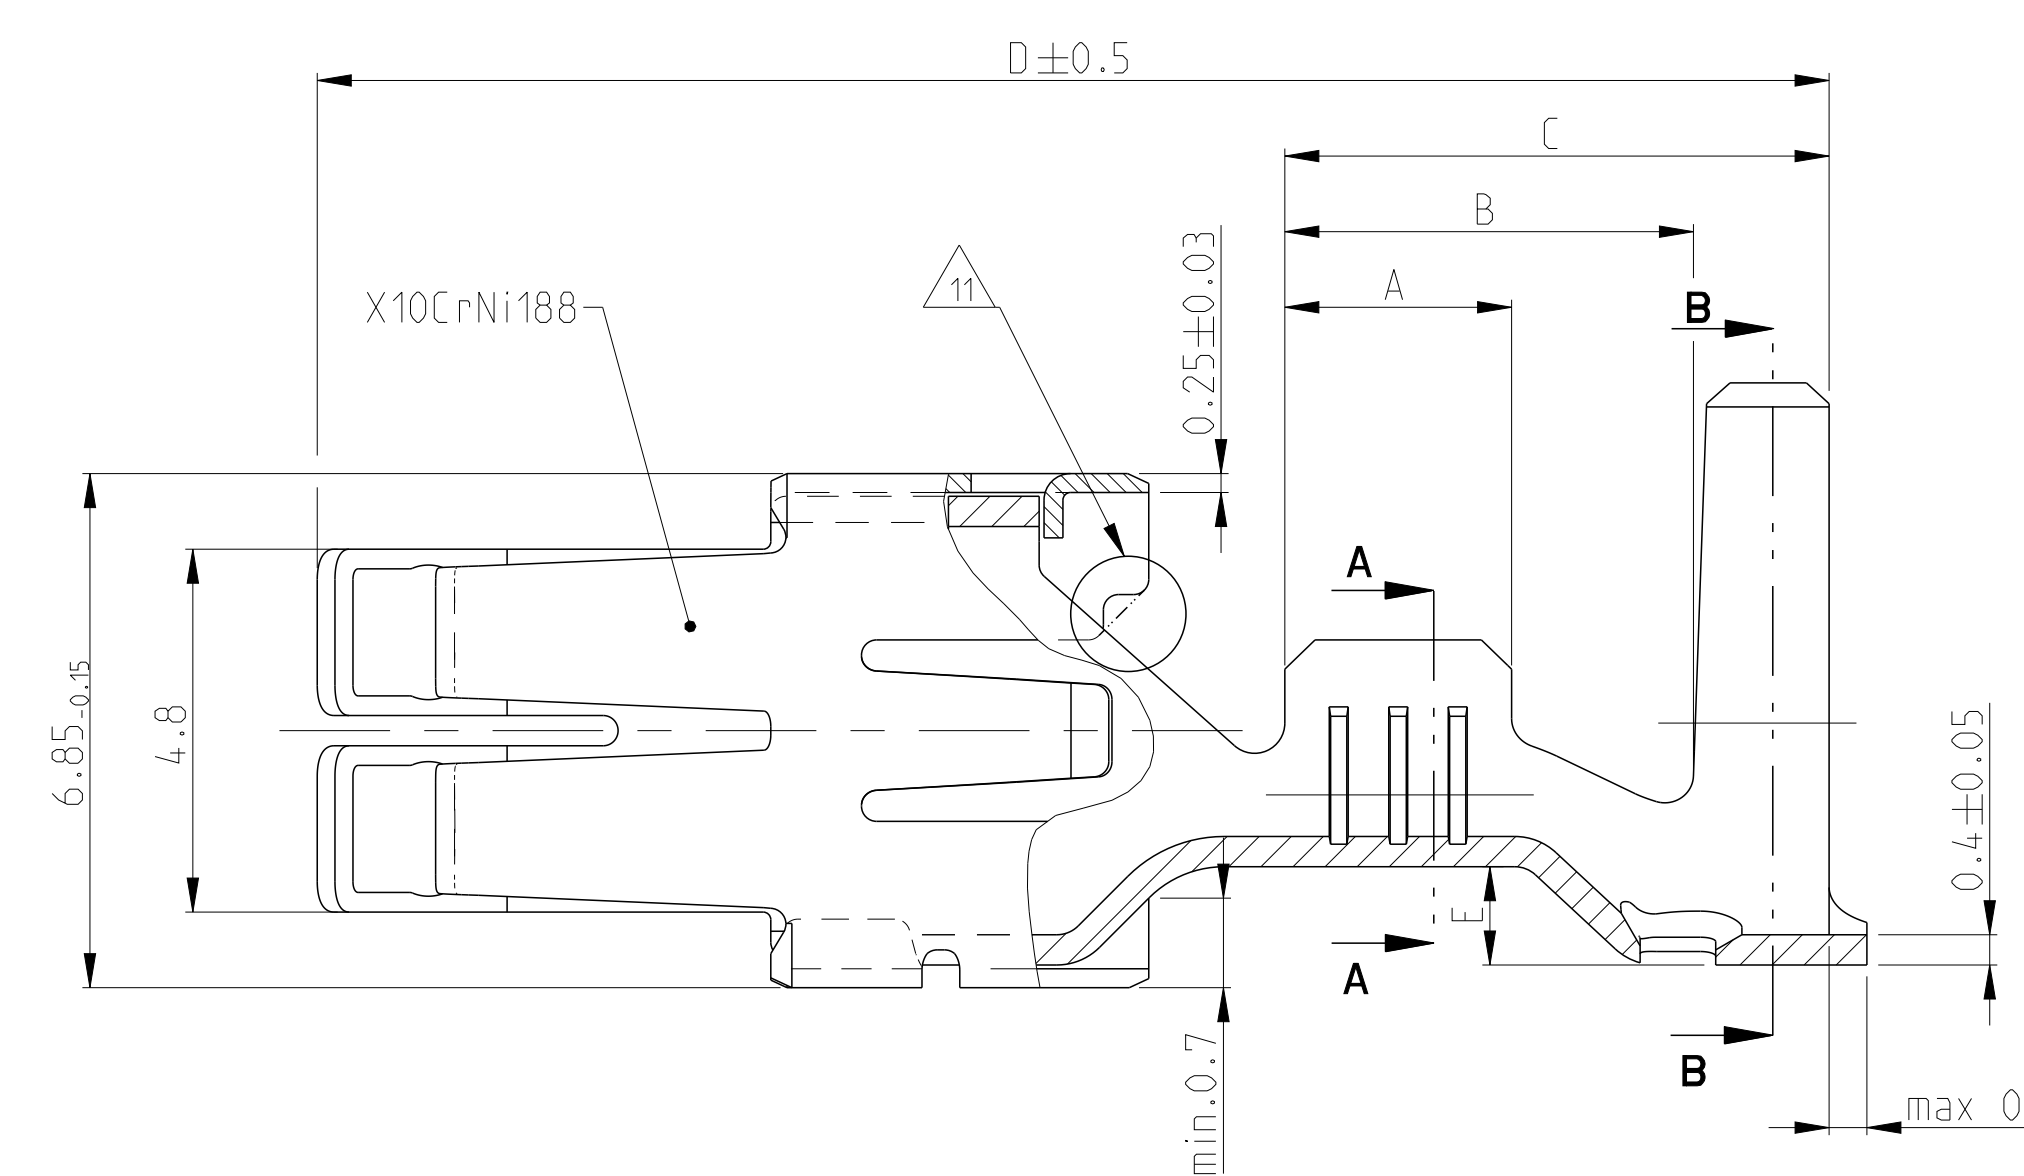

- CONTACT ZONE SELECTIVE PRE SILVER PLATED MIN 3-4.5 µm Kontaktzone selektiv vorversilbert min. 3-4.5 µm
- CONTACT ZONE SELECTIVE PRE SILVER PLATED MIN 1-1.5 µm Kontaktzone selektiv vorversilbert min. 1-1.5 µm
- CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL CONTACT AREA: GOLD PLATED Kontaktkörper: gal. verzinkt ueber Nickel Kontaktzone: vergoldet
- CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL CONTACT AREA: SELECTIVE NICKEL PLATED 2-4 µm Kontaktkörper: gal. verzinkt ueber Nickel Kontaktzone: selektiv vernickelt 2-4 µm
- CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL TOUCHING AREA TO CANTILEVER SPRING: SELECTIVE AU PLATED OVER NICKEL CANTILEVER SPRING: COMPLETELY AU PLATED Kontaktkörper: gal. verzinkt ueber Nickel Anlageflaeche zur Ueberfeder selektiv Au ueber Ni beschichtet Ueberfeder: komplett Au beschichtet

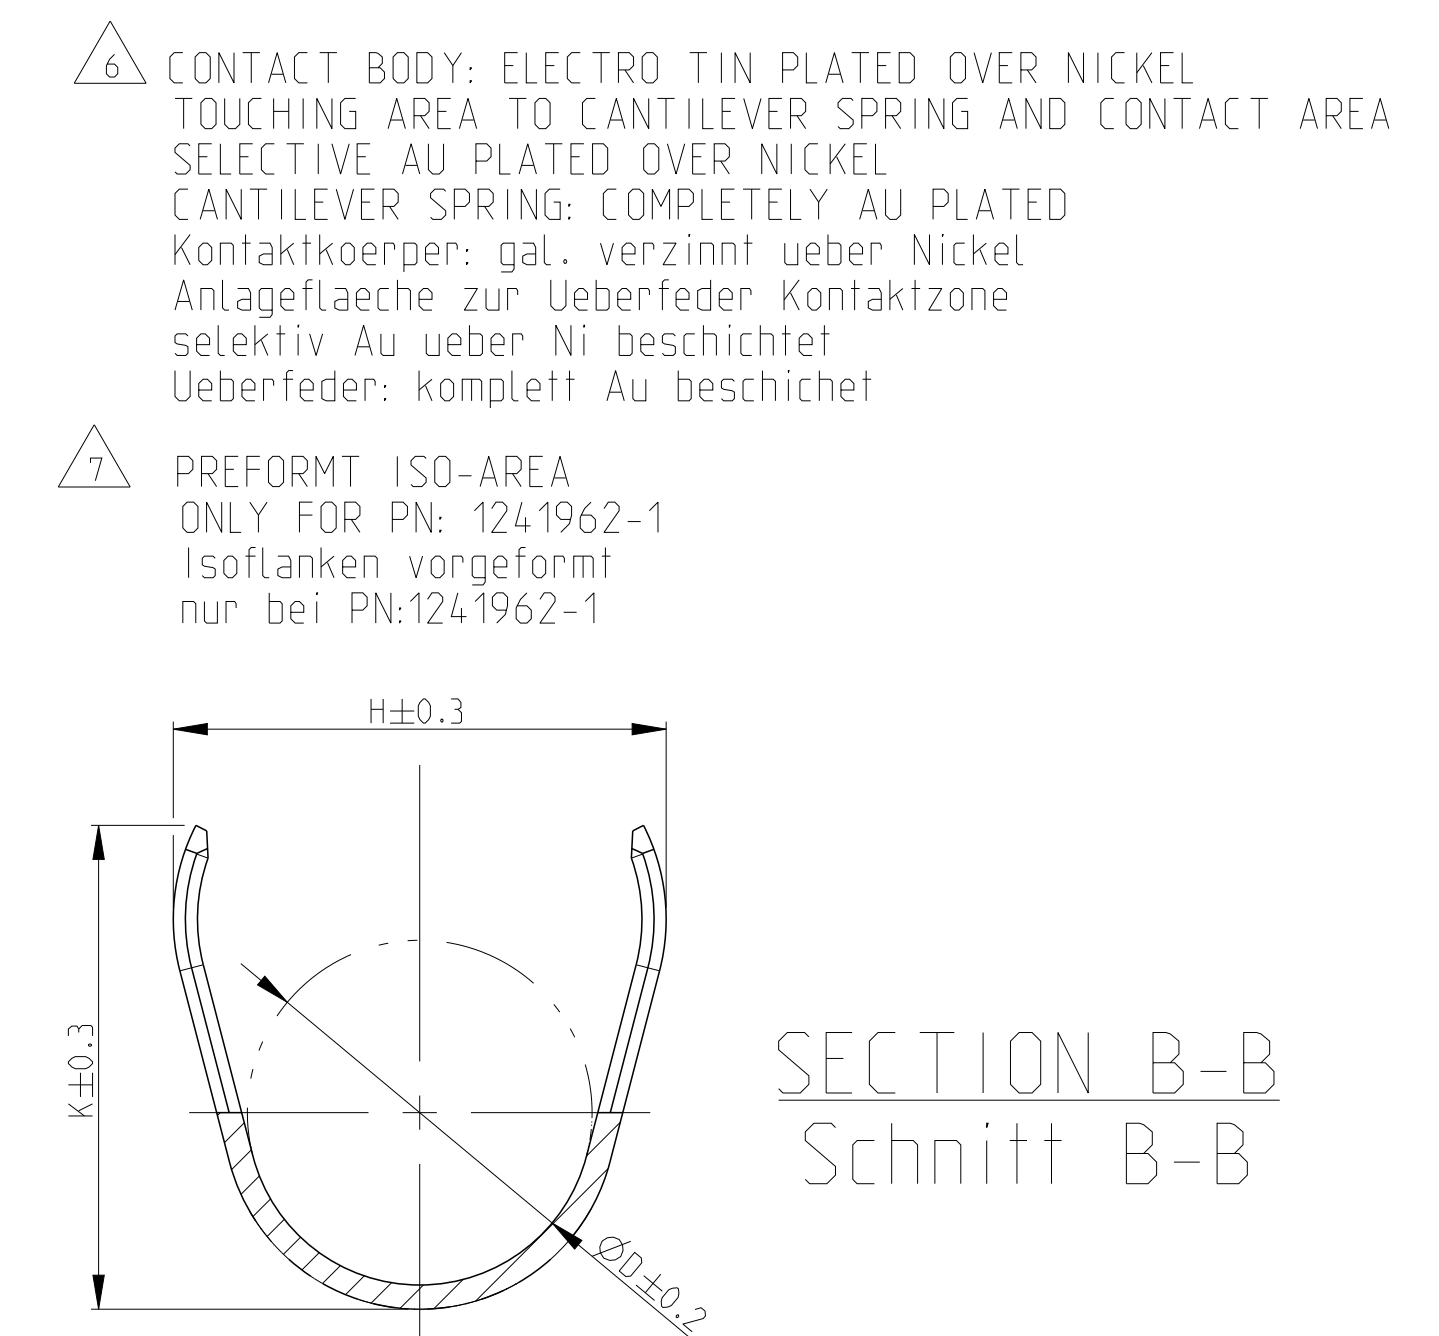

- WRAP CRIMP ONLY FOR PN: 927839, 927840, 928989 AND 928990 Umfassungscrimp nur bei PN: 927839, 927840, 928989 und 928990
- TRANSITION ONLY FOR PN: 927827, 927828, 927829, 927830, 927833, 927834, 927837, AND 927838 Uebergang nur fuer PN: 927827, 927828, 927829, 927830, 927833, 927834, 927837, und 927838
- 1-3 µm Sn28M LAYER FOR HIGHER TEMPERATURE REQUIREMENTS 1-3 µm Sn28M Schicht fuer hoehere Temperaturanforderungen
- DOTTED LINE IS ALTERNATIVE SHAPE Gestrichelte Linie alternative Form
- OBsolete
- SEE APPLICATION SPEC. FOR PREFERRED STANDARD TO MEET NEW REQUIREMENT 8LV214-2 SLOW MOTION BENDING TEST Siehe Verarbeitung Spezifikation fuer bevorzugten Standard um den neuen Anforderungen der LV214-2 Slow Motion Pruefung zu genuegen

請向電料棧有限公司 886-3-577356
 請向電料棧有限公司 886-3-572970
 請向電料棧(上海) 86-21-34970899
 請向電料棧(深圳) 86-755-83289787
<http://www.100y.com.tw>

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 19MAY2017 BY: JJM APPV: BK

STANDARD POWER TIMER CONTACT
 Standard Power Timer Kontakt

TE CONNECTIVITY
 111-18037
 SCALE: 10:1 SHEET: 1 of 1 REV: BA