
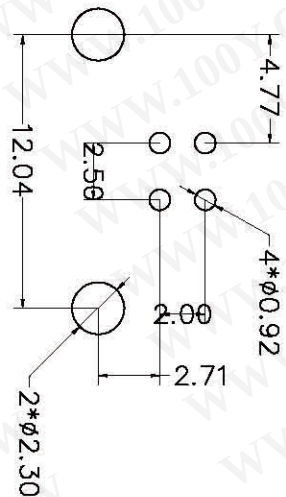
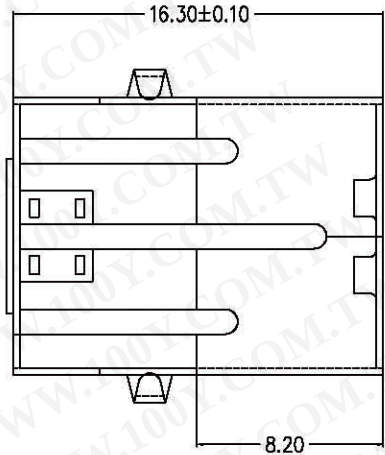
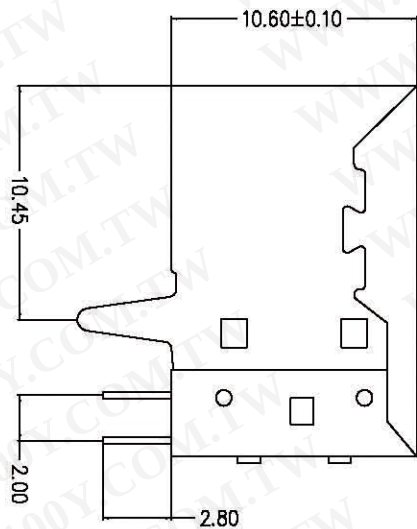


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

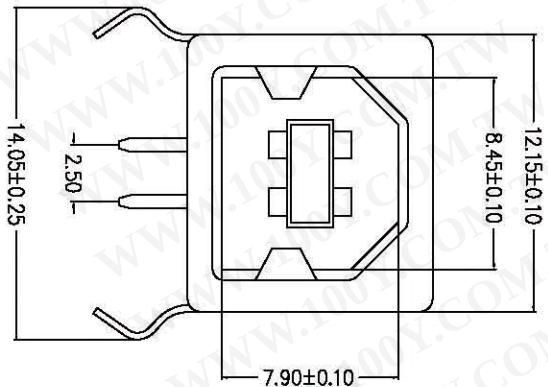

PCB.LaYOUT




特性:Specifications:
 电器:Electrical:
 接触阻抗:Contact Resistance
 30 milliohms MAX
 耐电压:Dielectric Withstanding Voltage:
 500V AC AT Sea Level
 绝缘阻抗:Insulation Resistance:
 100 MEGA ohms MIN

材料:Material:
 塑胶:PBT

端子:Contact:Copper Alloy C2680H
 铜壳/铁壳:Shell: Copper Alloy C2680H/Spec
 电镀:Finish:
 端子:Contact: Plated Gold in Mating Area;
 Tin/ On Solder Tails
 铜壳/铁壳:Shell:
 接触点镀金.脚镀锡
 Nickel Plating 镀镍

#39295

TOLERANCE UNLESS OTHERWISE SPECIFIED					
XXX	±0.10	DRAM NO	KCD	DATE	DRAW NAME
XX	±0.20	DWN	林云	09.05.20	BP90 度白胶铁壳
X	±0.30	CHK			
X°	±2°	APVD			P/N:
Third Angle Project	FINISH	MATERIAL	UNIT	SCALE	WEIGHT
			mm	1:1	REV
					SHEET
					1 OF 1

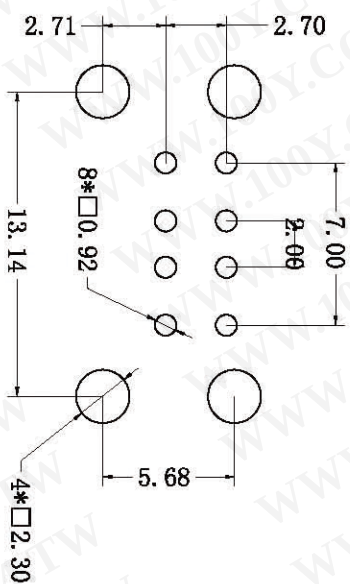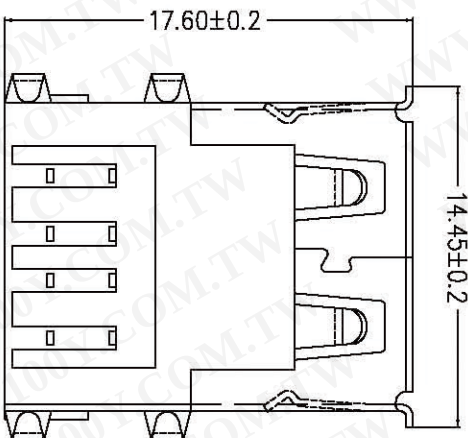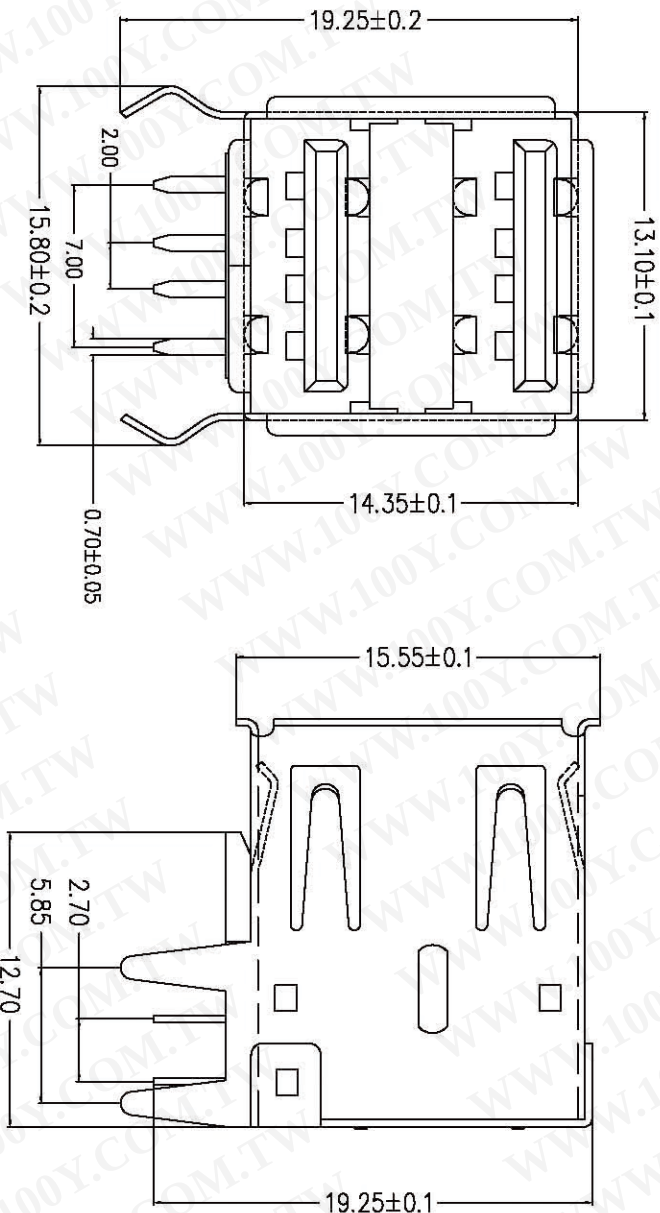

PCB.LAYOUT

特性:Specifications:
电器:Electrical:

接触阻抗:Contact Resistance

30 milliohms MAX

耐电压:Dielectric Withstanding Voltage:

500V AC AT Sea Level

绝缘阻抗:Insulation Resistance:

100 MEGA ohms MIN

材料:Material:

塑胶:PBT

端子:Contact:Copper Alloy C2680H

铜壳/铁壳:Shell: Copper Alloy C2680H/Spcc

电镀:Finish:

端子:Contact: Plated Gold in Mating Area;

Tin/ On Solder Tails

接触点镀金,脚镀锡

铜壳/铁壳:Shell:

Nickel Plating

镀镍

TOLERANCE UNLESS
OTHERWISE SPECIFIED

XXX ±0.10

XX ±0.20

X ±0.30

X° ±2°

DRAM NO

DWN

CHK

APVD

RCD

林云

DATE

09.06.20

DRAW NAME

USB AP90 度双层无弹

P/N:

Third Angle Project



FINISH

MATERIAL

UNIT

SCALE

WEIGHT


REV

SHEET

#47859




05: Selective Gold 30U

#52652

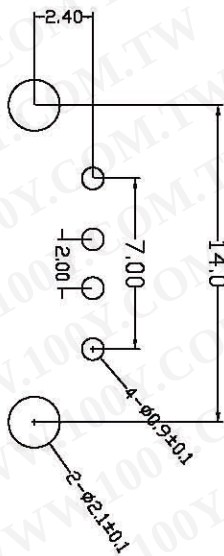


备注: 侧弹分为外弹与内弹

产 品 图					
PRODUCT CHART DWG.					
公差一览表 TOLERANCE UNLESS OTHERWISE					
X	±0.15	X ^c	±5°		
X	±0.10	X ^e	±2°		
XX	±0.05	XX ^e	±1°		
.XX	±0.03	.XX ^e	±0.5°		
单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PARTIAL PART NO.	
比例 SCALE	1:1	审核 CHECK	• • • •	产品名称 PRODUCT NAME	
日期 DATE	2009/10/20	核准 APPROVED	• • • •	角法 ANGLE VIEW	
USB-AF内扣弯脚			版本 VERSION	AO	

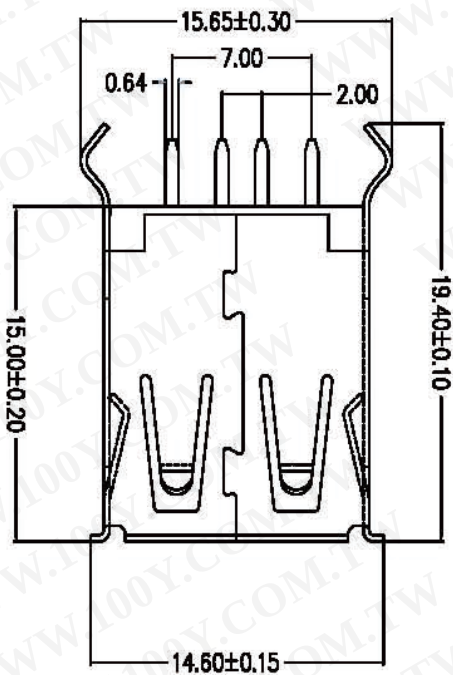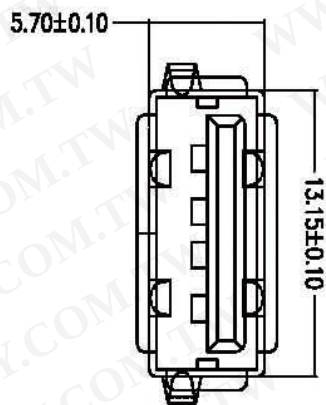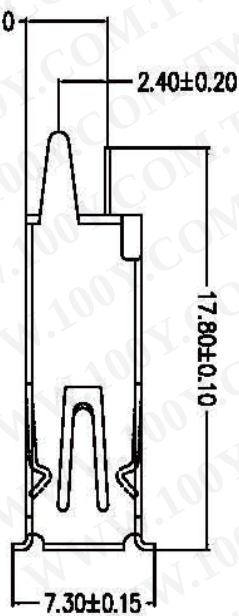

PCB.LAYOUT

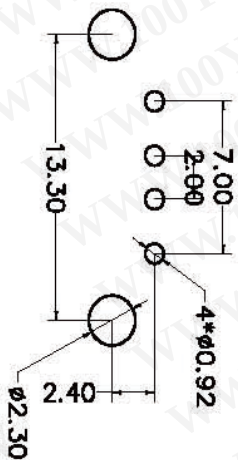

特性: Specifications: a;

电器: Electrical:

接触阻抗: Contact Resistance

30 milliohms MAX

耐电压: Dielectric Withstanding Voltage:

500V AC AT Sea Level

绝缘阻抗: Insulation Resistance:

100 MEGA ohms MIN

材料: Material:

塑胶: PRII

端子: Contact: Copper Alloy C2680H

铜壳铁壳: Shell: Copper Alloy C2680H/Spec

电镀: Finish:

端子: Contact: Plated Gold in Mating Area;

Tin/ On Solder Tails

接触点镀金, 脚镀锡

铜壳/铁壳: Shell:

Nickel Plating

镀镍

#89823

TOLERANCE UNLESS OTHERWISE SPECIFIED

XXX ±0.10

XX ±0.20

X ±0.30

X* ±2°

DRAM NO KCD DATE DRAW NAME

DWN 林云 09.07.20 USB AFI180 度直插弯脚 15.0

CHK 白胶铁壳

APVD P/N:



Third Angle Project

FINISH

MATERIAL

UNIT

mm

SCALE

1:1





WEIGHT

A

REV

1 OF 1

SHEET

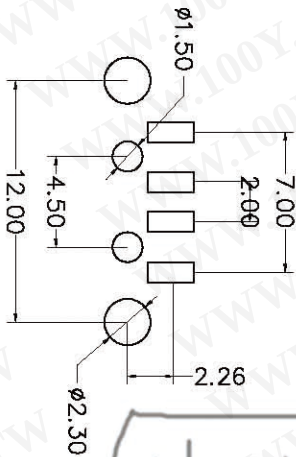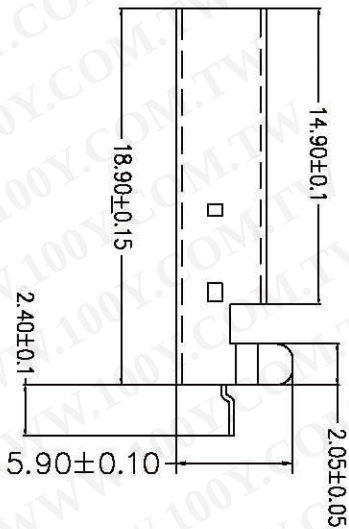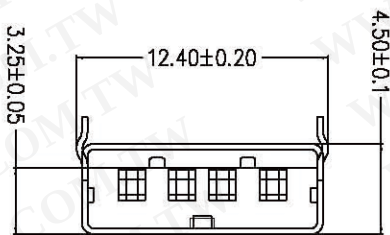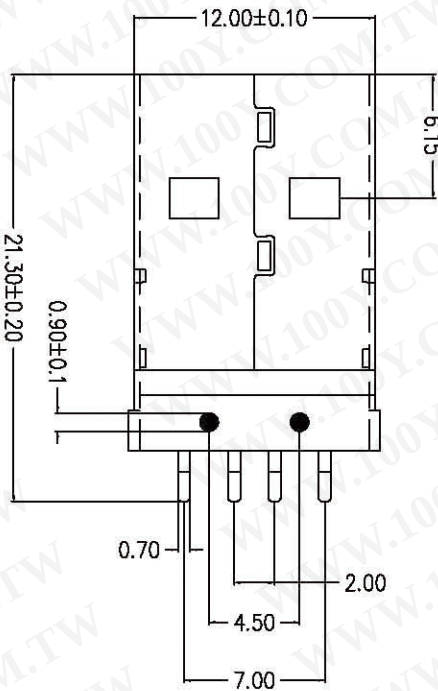

#41059

特性: Specifications
电特性: Electrical

接触电阻: Contact Resistance
30 Milliohms Max

耐压: Dielectric Withstanding Voltage:
500V AC AT Sea Level

绝缘电阻: Insulation Resistance:
100 Mega ohms Min

材料: Material:
塑胶: Housing: PBT

端子: Contact: Copper Alloy
铜合金

铁壳: Shell: Spcc

电镀: Finish:

端子: Contact: Plated Gold in Mating Area
Tin On Solder Tails

接触点镀金 脚镀锡







铁壳: Shell:

Nickel/ Plating 镀镍

PCB LAYOUT

Notes relative specific dimensions in mm 未注尺寸公差									
X	公差	客户	编号	图号	设计	审核	批准	Third Angle Projection	
XX	公差	品名	NO.	Drawing NO.	Designed by	Checked by	Approved by		
XXX	公差	Item							
XXXX	公差	版本							
XXXX	公差	REV							
XXXX	公差	Material							
XXXX	公差	厚度							
XXXX	公差	数量							
XXXX	公差	表面处理							
XXXX	公差	交期							
XXXX	公差	单位							
XXXX	公差	比例							
XXXX	公差	Scale							
XXXX	公差	mm							
XXXX	公差	FREE							

111

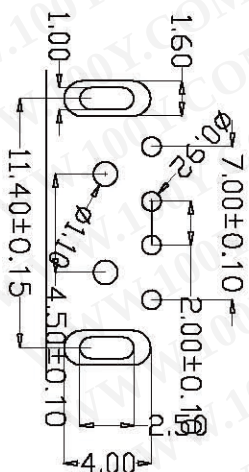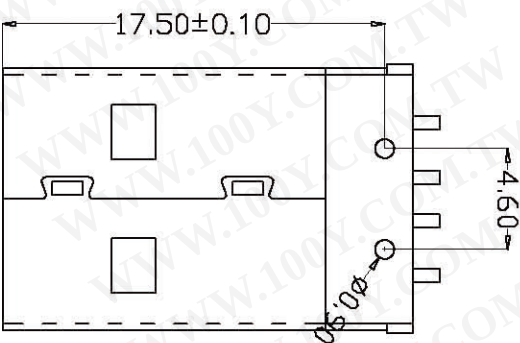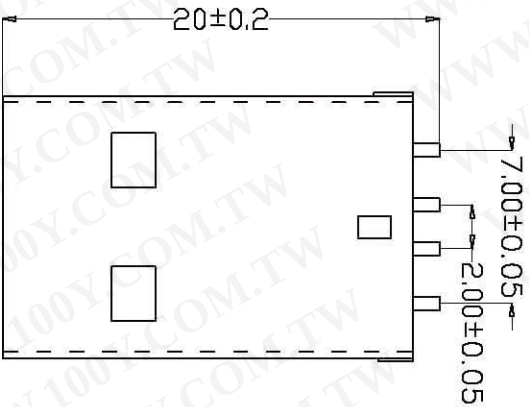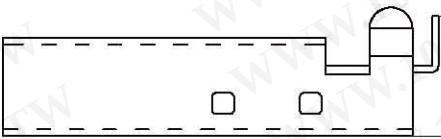

PCB LAYOUT

1. MATERIAL:

1. MATERIAL:

q.HOUSING: PBT GLASS FIBRE UL94 V-0

b. CONTACT: PHOSPHOR BRONZE T=0.25mm

(SURFACE PLATING: Au1u"+Sn100u"+Ni60u")

c.SHEEL: BRASS T=0.30mm

(SURFACE PLATING: Ni100u"~120u")

2. ELECTRIC:

d.CONTACT RESISTANCE: 30 MILLIOHMS MAX





b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d. OPERATING TEMPERATURE: $-55^{\circ}/105^{\circ}$

△	-			
△	-			
△	-			
△	-			
△	-			
MARK	SIGN	D/LET	ECN NO.	REV.
				E/O

	USING STANDARD PRACTICE UNLESS NOTED ON DRAWING	UNIT	MM	DESIGN	Looby	TITLE	USB AM 90° DIP成品
		SCALE	1:1	WEIGHTED		PART NO.	CC50-219-012A4
		DATE	2008-08-17	APPROVED		FILE NO.	

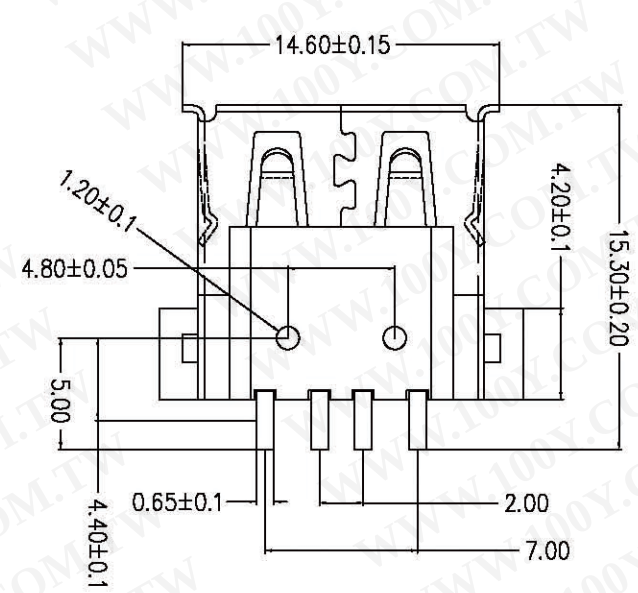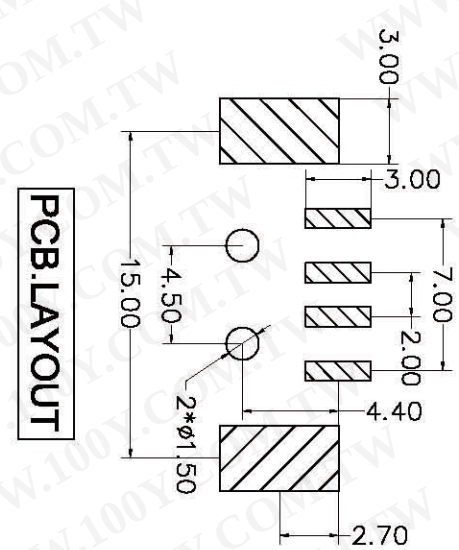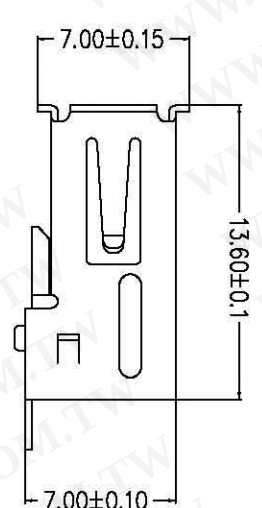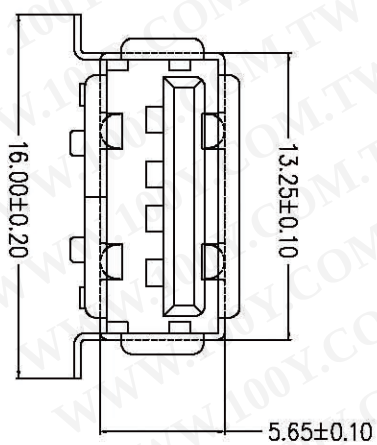

特性: Specifications:
电器: Electrical:

接触电阻: Contact Resistance
30 milliohms MAX

耐电压: Dielectric Withstanding Voltage:
500V AC AT Sea Level

绝缘阻抗: Insulation Resistance:
100 MEGA ohms MIN

材料: Material:
塑胶: PBT

端子: Contact: Copper Alloy C2680H
铜壳/铁壳: Shell: Copper Alloy C2680H/Spcc
电镀: Finish:
端子: Contact: Plated Gold in Mating Area;
Tin/ On Solder Tails

铜壳/铁壳: Shell:
Nickel Plating
接触点镀金, 脚镀锡
镀镍

TOLERANCE UNLESS
OTHERWISE SPECIFIED

OTHERWISE SPECIFIED	UNLESS SPECIFIED
XXX	±0.10
XX	±0.20
X	±0.30
X°	±2°

FINISH	UNIT	SCALE	WEIGHT	REV	SHEET
MATERIAL	mm	1:1		A	1 OF 1

USAF-SMT-4P