







Lighting Connectors "Service" Connectors

Installation side 1.0 – 2.5 mm ² solid Lighting side 0.5 – 2.5 mm ² rig.+ flex 400 V/4 kV/2 ①; 24 A 9 – 11 mm / 0.39 in * ① ② VDE ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿ GL BV	AWG 14 – 12 AWG 20 – 16 300 V, 20 A ① ②	Installation side 1.0 – 2.5 mm ² solid Lighting side 0.5 – 2.5 mm ² rig.+ flex 400 V/4 kV/2 ①; 24 A 9 – 11 mm / 0.39 in * ① ② VDE ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿ GL BV	AWG 14 – 12 AWG 20 – 16 300 V, 20 A ① ②	0.5 – 2.5 mm ² rig.+ flex 400 V/4 kV/2 ① 24 A 9 – 11 mm / 0.39 in * ① ② VDE ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿ GL BV	AWG 20 – 16 300 V, 20 A ① ②
---	---	---	---	--	--------------------------------



Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
Lighting connectors, standard version, continuous service temperature 105°C, grey		2-conductor lighting connectors, standard version, continuous service temperature 105°C, white		"Service" connector grey	
224-101	1000 (10 x 100)	224-112	1000 (10 x 100)	224-201	50
version for increased continuous service temperature of 120°C, black		version for increased continuous service temperature of 120°C, black			
224-104	100	224-114	100		

Dimensions (in mm) ① in grounded (earthed) supply systems 400 V = rated voltage 4 kV = rated surge voltage 2 = pollution degree (see also section 15)

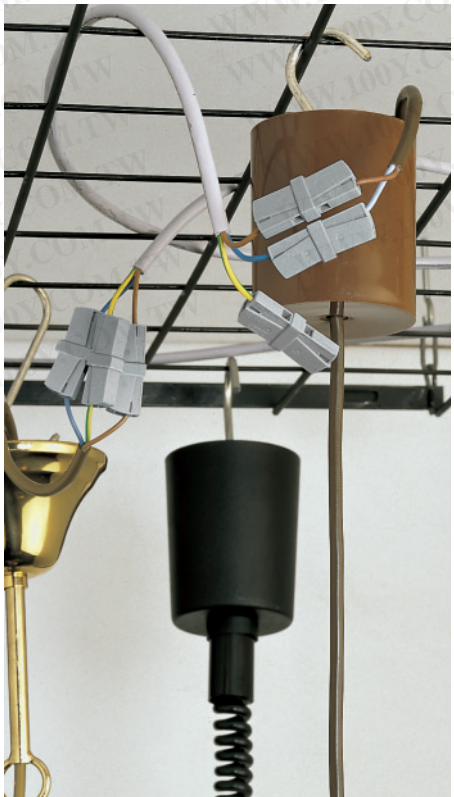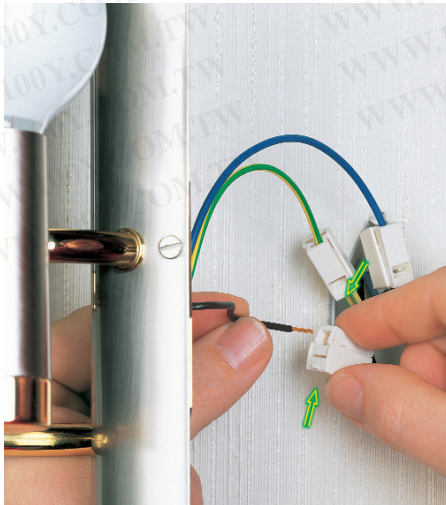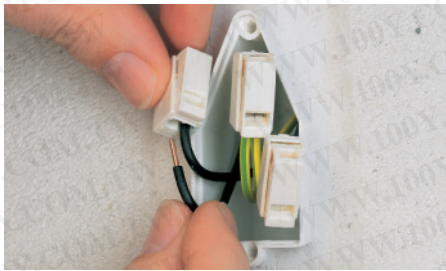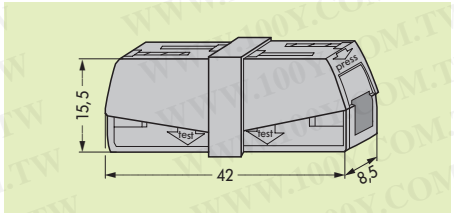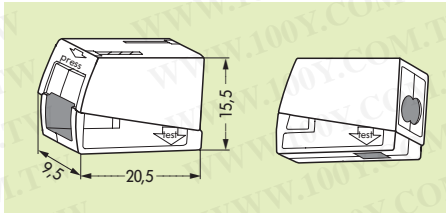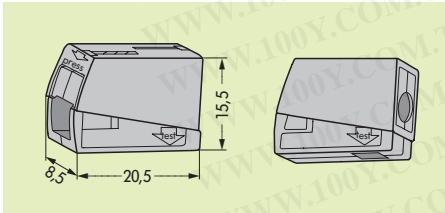

* For further approvals with corresponding ratings see section 15.