



产品编号：[190030044](#)
Product Description：InsulKrimp Quick
Disconnect, Female, Box, Tab 6.35 x 0.81mm
系列号：19003
状态：Active
Product Category：Quick Disconnects
工程编号：BB-2206VB



文件和资源

图纸

[图纸 190030044_sd.pdf](#)

3D 模型和设计文件

[3D模型 190030044_stp.zip](#)

规格

[产品规格 PS-19902-008-001.pdf](#)

[产品规格 PS-19902-011-001.pdf](#)

产物环境合规

合规

GADSL/IMDS	Compliant with Exemption 44
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

[多部分产品合规性声明](#)

- Eu RoHS
- REACH SVHC

- Low-Halogen
- 多部分行业合规性文件
- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Quick Disconnects
系列	19003
说明	InsulKrimp Quick Disconnect, Female, Box, Tab 6.35 x 0.81mm
个评论	Funnel Entry
产品系列	Standard Quick-Disconnect Terminals
产品名称	InsulKrimp
类型	Quick Disconnect
UPC	800753029125

机构

UL	E79133
----	--------

电气

电压 - 最大	600V
---------	------

物理

筒型	已关闭
颜色-树脂	蓝色
阻燃性	94V-0
性别	女
符合灼热丝规范	否
绝缘	Fully

绝缘	Nylon (PA)
锁定插接部位	无
材料 - 金属	Brass
材料 - 接合部位电镀	Tin
材料 - 终端电镀	Tin
材料 - 树脂	Nylon
净重	0.998/g
方向	Straight
包装形式	Bag
最薄镀层 - 接合部位	4.064µm
最薄镀层 - 端接	4.064µm
有极性的插配件	否
调整片厚度	0.81mm
调整片宽	6.35mm
运行温度范围	-65° to +105° C
终端界面类型	Crimp or Compression
线径规格 (AWG)	14, 16

进程


无铅	不适用
----	-----

施工工具

全局

描述	产品编号
PremiumGrade Hand Crimp Tool for Insulkrimp Quick Disconnect Terminals, 10-22 AWG	<u>640010400</u>
Crimp Head for the AT-200 Pneumatic Hand Tool	<u>640050400</u>

10	9	8	7	6	5	4	3	2	1		
LOOSE PIECE MAT'L NO.	LOOSE PIECE ENGRNG NO.	CONTINUOUS STRIP MAT'L NO.	CONTINUOUS STRIP ENGRNG NO.	TAPE MAT'L NO.	TAPE ENGRNG NO.	FITS MALE TAB SIZE	"A" MAX	"C" MAX	"E" MAX	"H" NOMINAL	
190030132	BB-2207V	190030134	BB-2207VC	190030133	BB-2207VT	.187 X .020	.78 (19.8)	.316 (8.03)	.170 (4.32)	1.38 (35.1)	
190030135	BB-2208V	190030137	BB-2208VC	190030136	BB-2208VT	.187 X .032	.78 (19.8)	.316 (8.03)	.170 (4.32)	1.38 (35.1)	
190030044	BB-2206VB	190030045	BB-2206VBC	190030080	BB-2206VBT	.250 X .032	.86 (21.8)	.380 (9.65)	.180 (4.57)	1.42 (35.6)	

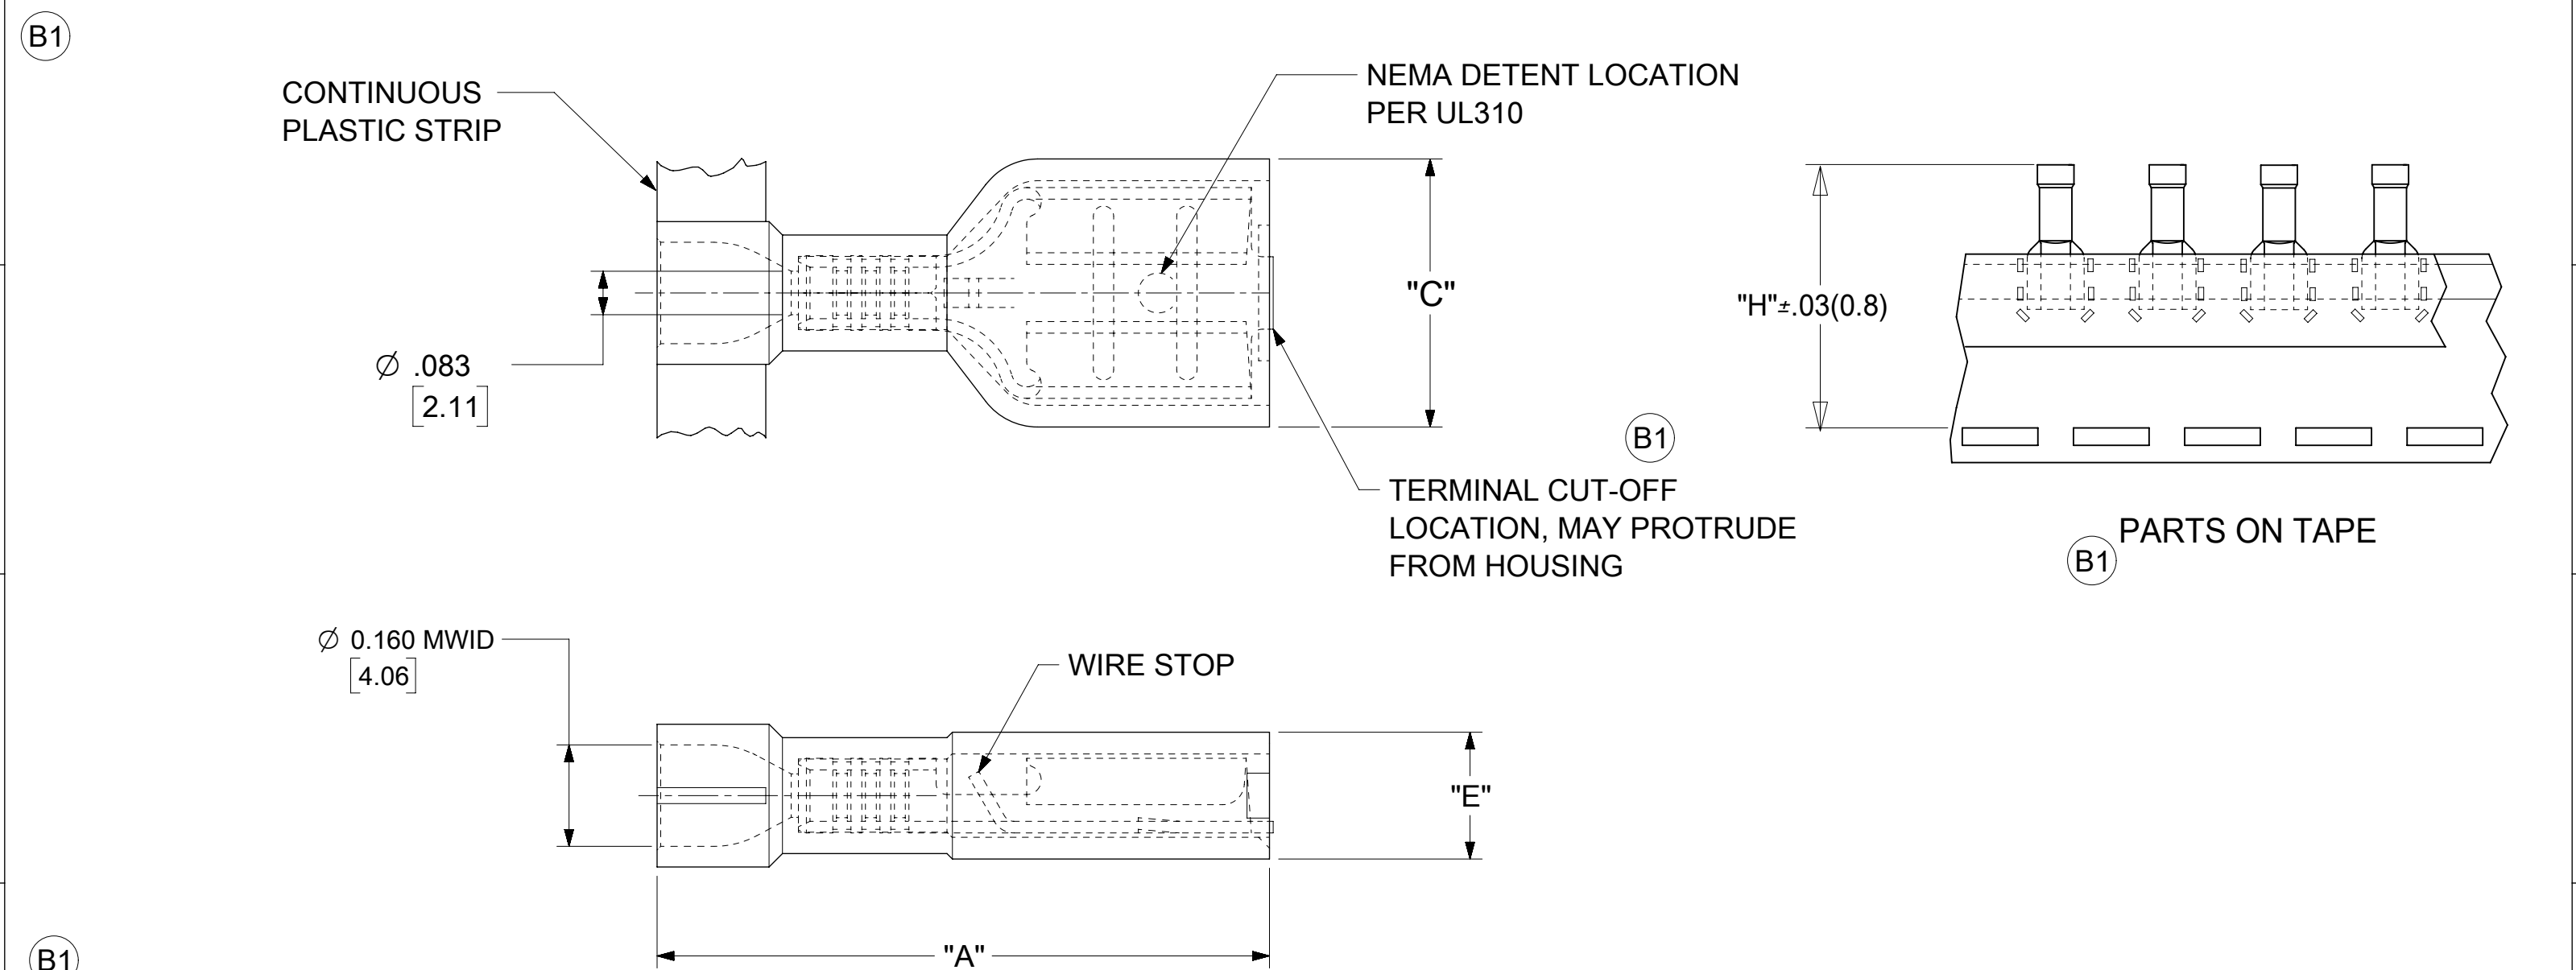

NOTE(S):											
1. MATERIAL:											
TERMINAL: BRASS .016/ 0.41											
PLATING: ELECTRO-TIN											
INSULATION: NYLON 6/6 94V-0 RATING											
COLOR: BLUE											
2. MWID = MAXIMUM WIRE INSULATION DIAMETER.											
3. PRODUCT SPECIFICATION: PS-19902-008											
4. PARTS ARE RoHS COMPLIANT.											
DOCUMENT STATUS	P1	RELEASE DATE	2018/11/02	16:36:42							