



产品编号：190060003

系列号：19006

Product Category：Quick Disconnects

Product Description：Avikrimp Quick Disconnect, Female Flag, for 18-22 AWG (0.80-0.35mm²) Wire, Tab 6.35 x 0.81mm, Red, Mylar Tape Mounted

状态：Active

工程编号：AA-5220T

文件和资源

图纸

图纸 190060003_sd.pdf

3D 模型和设计文件

3D模型 190060003_stp.zip

规格

产品规格 PS-19902-011-001.pdf

产品规格 PS-19902-014-001.pdf

产品规格 PS-19902-015-001.pdf

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen
- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Quick Disconnects
系列	19006
说明	Avikrimp Quick Disconnect, Female Flag, for 18-22 AWG (0.80-0.35mm ²) Wire, Tab 6.35 x 0.81mm, Red, Mylar Tape Mounted
产品系列	Standard Quick-Disconnect Terminals
产品名称	Avikrimp
类型	Quick Disconnect
UPC	800753030923

机构

CSA	LR18689
UL	E79133

电气

电压 - 最大	600V
---------	------

物理

筒型	已关闭
颜色-树脂	红色
阻燃性	94V-2
性别	女
符合灼热丝规范	是
绝缘	Fully
绝缘	Nylon (PA)
锁定插接部位	无
材料 - 金属	Brass

材料 - 接合部位电镀	Tin
材料 - 终端电镀	Tin
材料 - 树脂	Nylon
净重	1.369/g
方向	标志
包装形式	Adhesive Tape on Reel
有极性的插配件	否
调整片厚度	0.81mm
调整片宽	6.35mm
运行温度范围	-65° to +105° C
导线绝缘直径	3.81mm max.
线径规格 (AWG)	18, 20, 22

进程


无铅	不适用
----	-----

施工工具

全局

描述	产品编号
ATP Crimp Dies for the Tape Crimp Module and ATP-101 & 301 Press	<u>192880057</u>

10		9		8		7		6		5		4		3		2		19006	
MATERIAL NO.	ENG. NO.	MATERIAL NO. TAPE MOUNTED	ENG. NO. TAPE MOUNTED	MATERIAL NO. STRIP MOUNTED	ENG. NO. STRIP MOUNTED	AWG	COLOR	MWID	"L" ±.015/.381	"E" ±.015/.381	"C" DIA ±.015/.381	"G" ±.015/.381	"H" ±.015/.381						
190060001	AA-5220	190060003	AA-5220T	190060004	AA-5220Z	22-18	RED	.150/3.81											
190060011	BB-5221	190060013	BB-5221T	190060014	BB-5221Z	16-14	BLUE	.170/4.32	.620/15.75	.512/13.00	.222/5.64	.690/17.53	.196/4.98						
190060019	C-5211	190060020	C-5211T	190060070	C-5211Z	12-10	YELLOW	.245/6.22	.667/16.94	.500/12.70	.242/6.15	.690/17.53	.196/4.98						
										.511/12.98	.311/7.90	.677/17.20	.246/6.25						

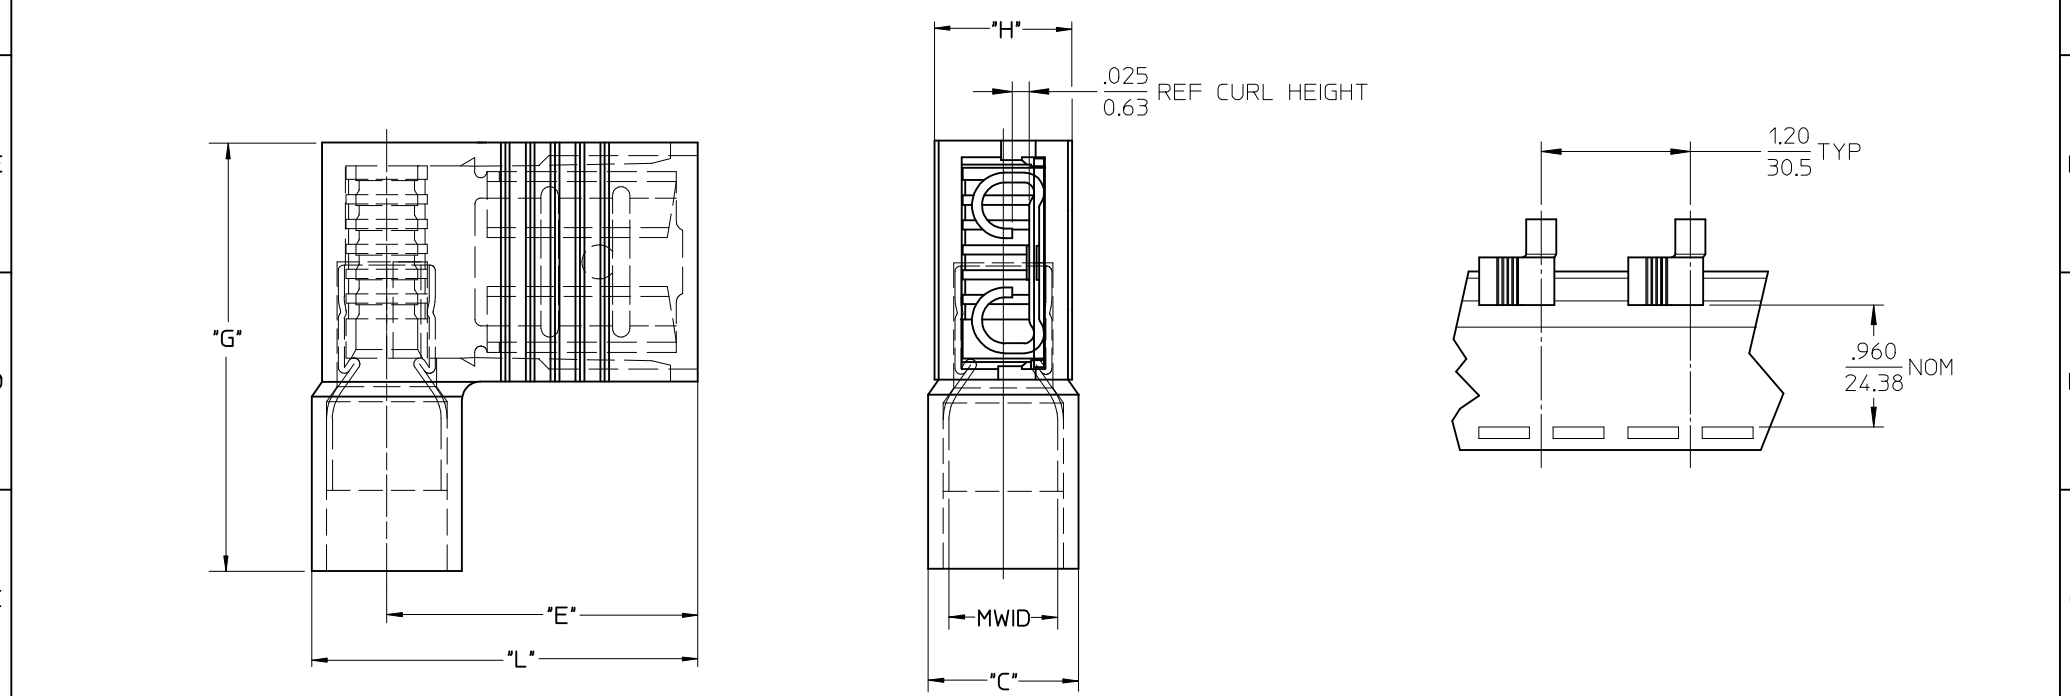

SALES DRAWING

- NOTES:
1. MATERIAL: BRASS.
PLATING: ELECTROPLATE TIN.
 2. INSULATION: NYLON.
 3. MWID=MAXIMUM WIRE INSULATION DIA.
 4. ALL DIMENSIONS IN INCHES (MM).

EC NO: ETC2004-0126 DRWN:DMYRICK 2004/01/06 CHKD: SBEITZEL 2004/01/06 APPR:RDEROSS 2004/01/07	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
					DIMENSION STYLE		TITLE AVIKRIMP FLAG FULLY INSULATED .250 TAB WIDTH  MOLEX INCORPORATED			
					IN/MM					
					DRAWN BY DATE					
					CHECKED BY DATE					
					SBEITZEL 03/12/26					
			ANGULAR ±1/2°		APPROVED BY DATE		MATERIAL NO.		DOCUMENT NO.	SHEET NO.
			DRAFT WHERE APPLICABLE		RDEROSS 03/12/26		(SEE CHART)		SD-19006-001	1 OF 1
B	REV		MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					B