

产品编号 : 194180026

Product Description : MX150L 12 Circuit
 Receptacle for 18-22 AWG Wire, with CPA,
 Black

系列号 : 19418

状态 : Active

Product Category : Connector Housings



文件和资源

图纸

图纸 194180026_sd.pdf

包装设计图 PK-19418-001-001.pdf

3D 模型和设计文件

3D模型 194180026_stp.zip

规格

应用规格 AS-19417-001-001.pdf

产品规格 PS-19417-001-001.pdf

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	19418
说明	MX150L 12 Circuit Receptacle for 18-22 AWG Wire, with CPA, Black
应用	Power, Wire-to-Board, Wire-to-Wire
个评论	IP67 rated; Conforms to UL 1977; NOT suitable for automotive applications with requirements such as USCAR-2, USCAR-25, GMW3191, AK Testing, J2030, Volvo Technology Requirements, and Toyota Connector Spec (TCS)
产品系列	MX150L Industrial Sealed Connector System
产品名称	MX150L
UPC	822348526642

机构

UL	E152602
----	---------

电气

每触点最大电流	18.0A
---------	-------

物理

电路数（最多）	12
颜色-树脂	黑色
阻燃性	94V-0
性别	Receptacle
符合灼热丝规范	否

锁定插接部位	是
行数	2
包装形式	Bag
面板安装式	否
间距 - 插配接口	5.84mm
有极性的插配件	是
可堆叠的	否
运行温度范围	-40° to +125° C


可配插/可连接使用的产品

可配插部件

描述	产品编号
MX150L Plug Housings	<u>19419</u>
MX150L Panel Mount Plug Housings	<u>19429</u>

可连接使用部件

描述	产品编号
MX150L Female Terminals	<u>19420</u>

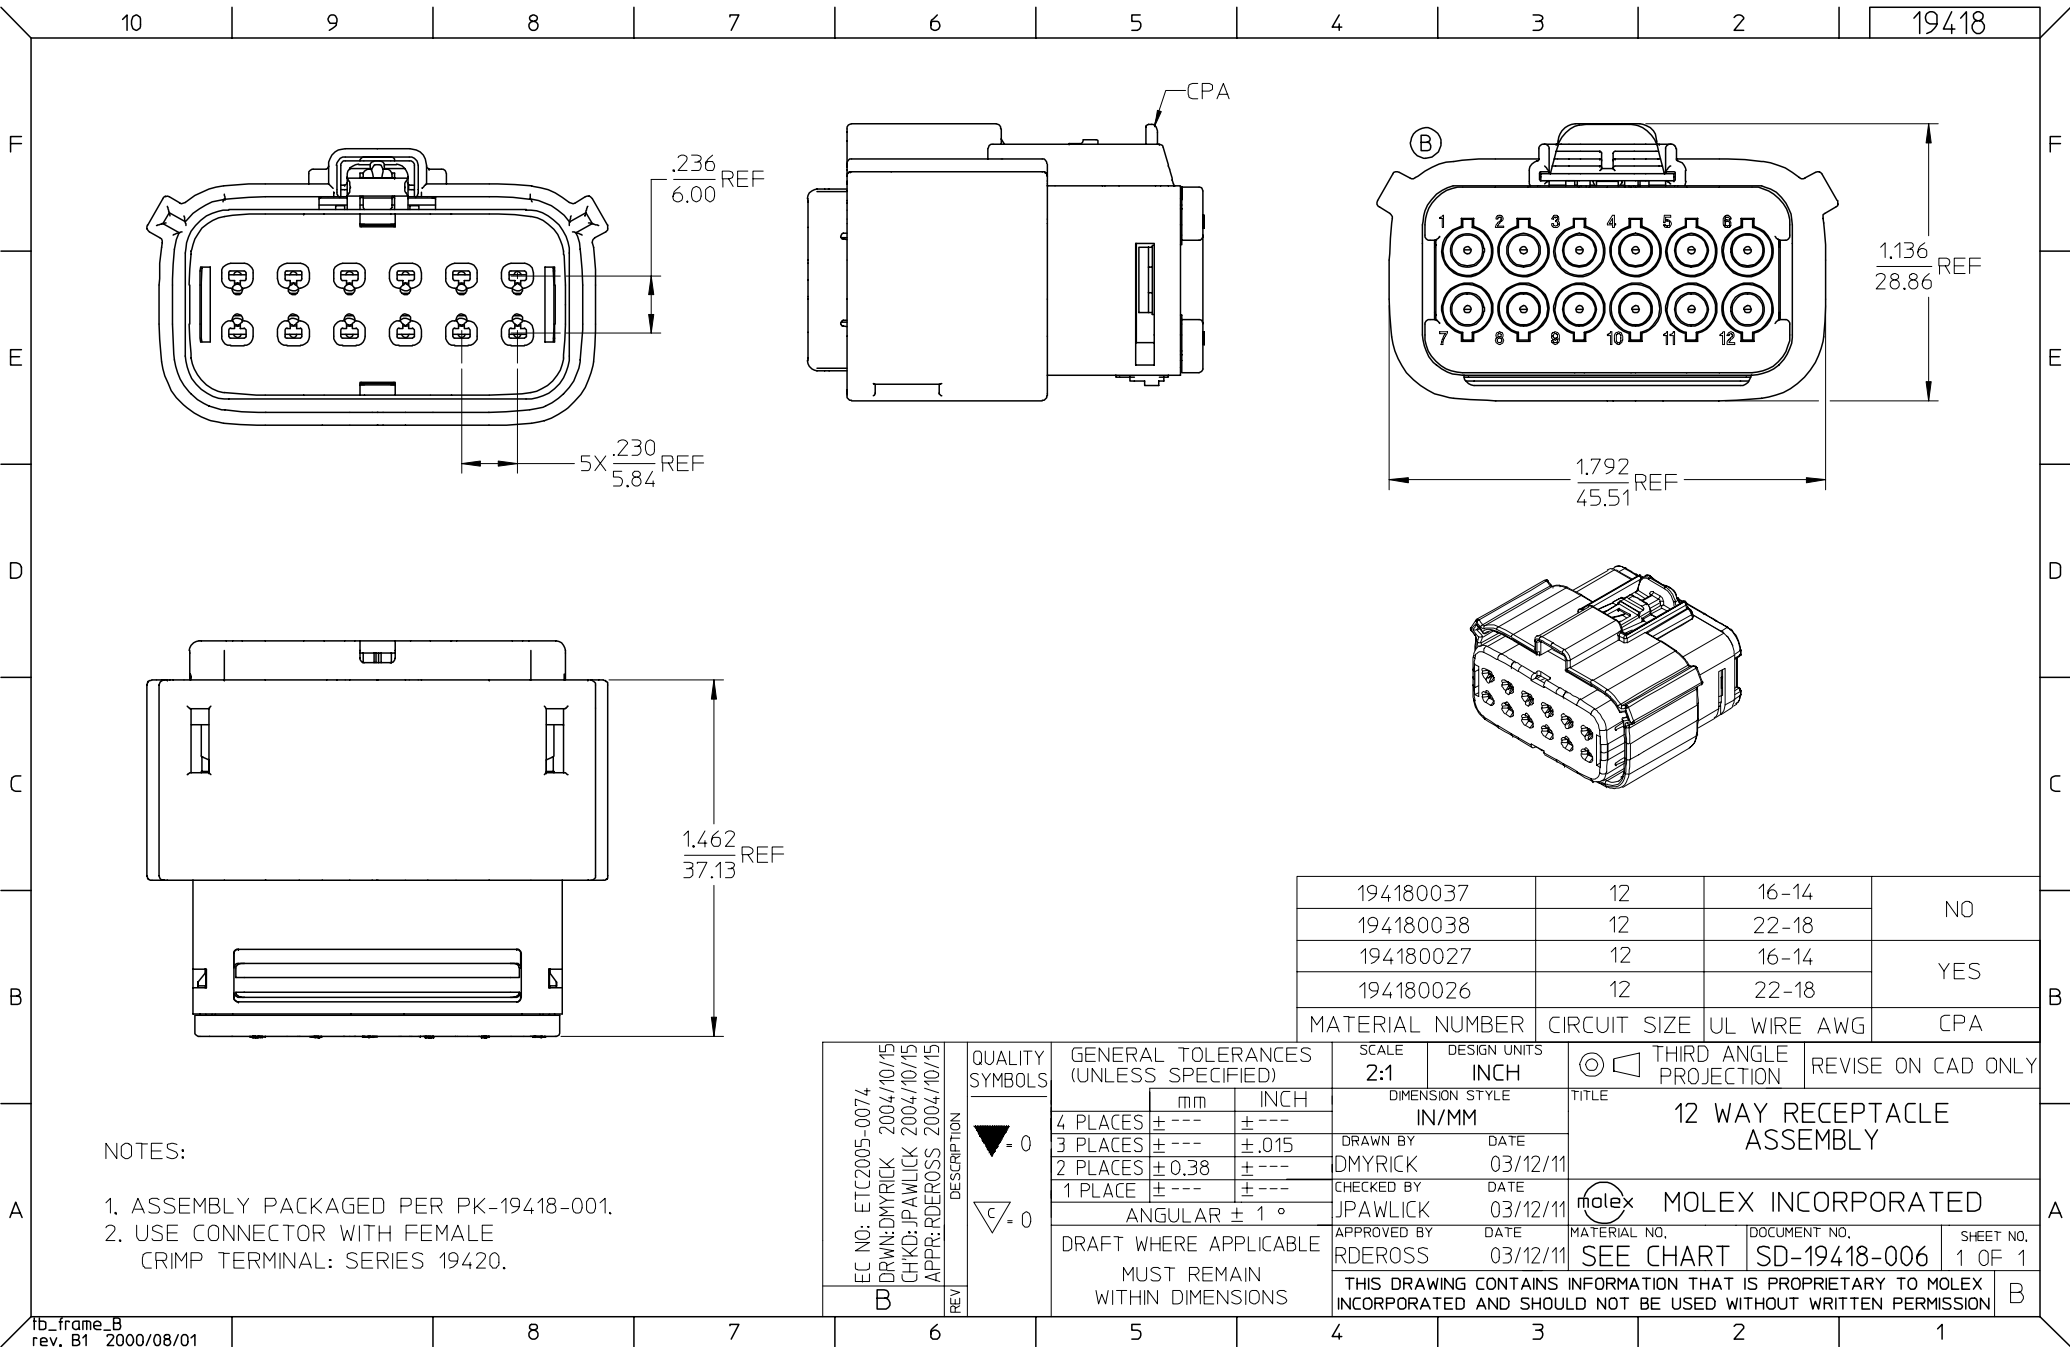

194180037	12	16-14	NO
194180038	12	22-18	
194180027	12	16-14	YES
194180026	12	22-18	
MATERIAL NUMBER	CIRCUIT SIZE	UL WIRE AWG	CPA

EC NO: ETC2005-0074 DRWN: DMYRICK 2004/10/15 CHKD: JPAWLICK 2004/10/15 APPR: RDEROSS 2004/10/15	DESCRIPTION	QUALITY SYMBOLS ▽ - 0 ▽ - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
				mm	INCH	DIMENSION STYLE IN/MM				
			4 PLACES	± ---	± ---	DRAWN BY				DATE
			3 PLACES	± ---	± .015	DMYRICK				03/12/11
			2 PLACES	± 0.38	± ---	CHECKED BY				DATE
			1 PLACE	± ---	± ---	JPAWLICK				03/12/11
			ANGULAR ± 1 °		APPROVED BY	DATE				MATERIAL NO.
DRAFT WHERE APPLICABLE		RDEROSS	03/12/11	SEE CHART	SD-19418-006	1 OF 1				
MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
B	REV							B		