




产品编号：[348241164](#)

Product Description：PROPOSED
REPLACEMENT: MINI50 GEN II UNSEALED
RECEPTACLES (206523 SERIES); Mini50
Unsealed Receptacle, Dual Row, Bridged, 16
Circuits, EcoPaXX Resin, Polarization
Option A, Black

系列号：34824

状态：Active

Product Category：Connector Housings



文件和资源

图纸

[图纸 348241164_sd.pdf](#)

[包装设计图 PK-31301-538-001.pdf](#)

[包装设计图 PK-31301-538-001.pdf](#)

3D 模型和设计文件

[3D模型 348241164_stp.zip](#)

规格

[应用规格 AS-34791-020-CH-001.pdf](#)

[应用规格 AS-34791-020-001.pdf](#)

[产品规格 PS-34791-020-001.pdf](#)

[测试摘要 347910020-TS-000.pdf](#)

产物环境合规

合规

GADSL/IMDS	Compliant
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

[多部分产品合规性声明](#)

- Eu RoHS

- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	34824
说明	PROPOSED REPLACEMENT: MINI50 GEN II UNSEALED RECEPTACLES (206523 SERIES); Mini50 Unsealed Receptacle, Dual Row, Bridged, 16 Circuits, EcoPaXX Resin, Polarization Option A, Black
应用	Automotive, Power, Wire-to-Board
产品系列	Mini50 Connection Systems
产品名称	Mini50
UPC	191128224840

物理

电路数（最多）	16
颜色-树脂	黑色
性别	Receptacle
符合灼热丝规范	否
插接极性	是
锁定插接部位	是
材料 - 树脂	Nylon
净重	1. 773/g
行数	2
包装形式	Bag

面板安装式	否
间距 - 插配接口	2.00mm
间距 - 终端界面	2.00mm
极化	A
有极性的插配件	是
可堆叠的	否
运行温度范围	-40° to +105° C


可配插/可连接使用的产品

可配插部件


描述	产品编号
Mini50 Unsealed Dual Row Vertical Headers	<u>34825</u>
Mini50 Unsealed Dual Row Right-Angle Headers	<u>34826</u>
Mini50 Unsealed Dual Row Right-Angle Headers	<u>34897</u>

可连接使用部件


描述	产品编号
CTX50 Unsealed Receptacle Terminals	<u>560023</u>

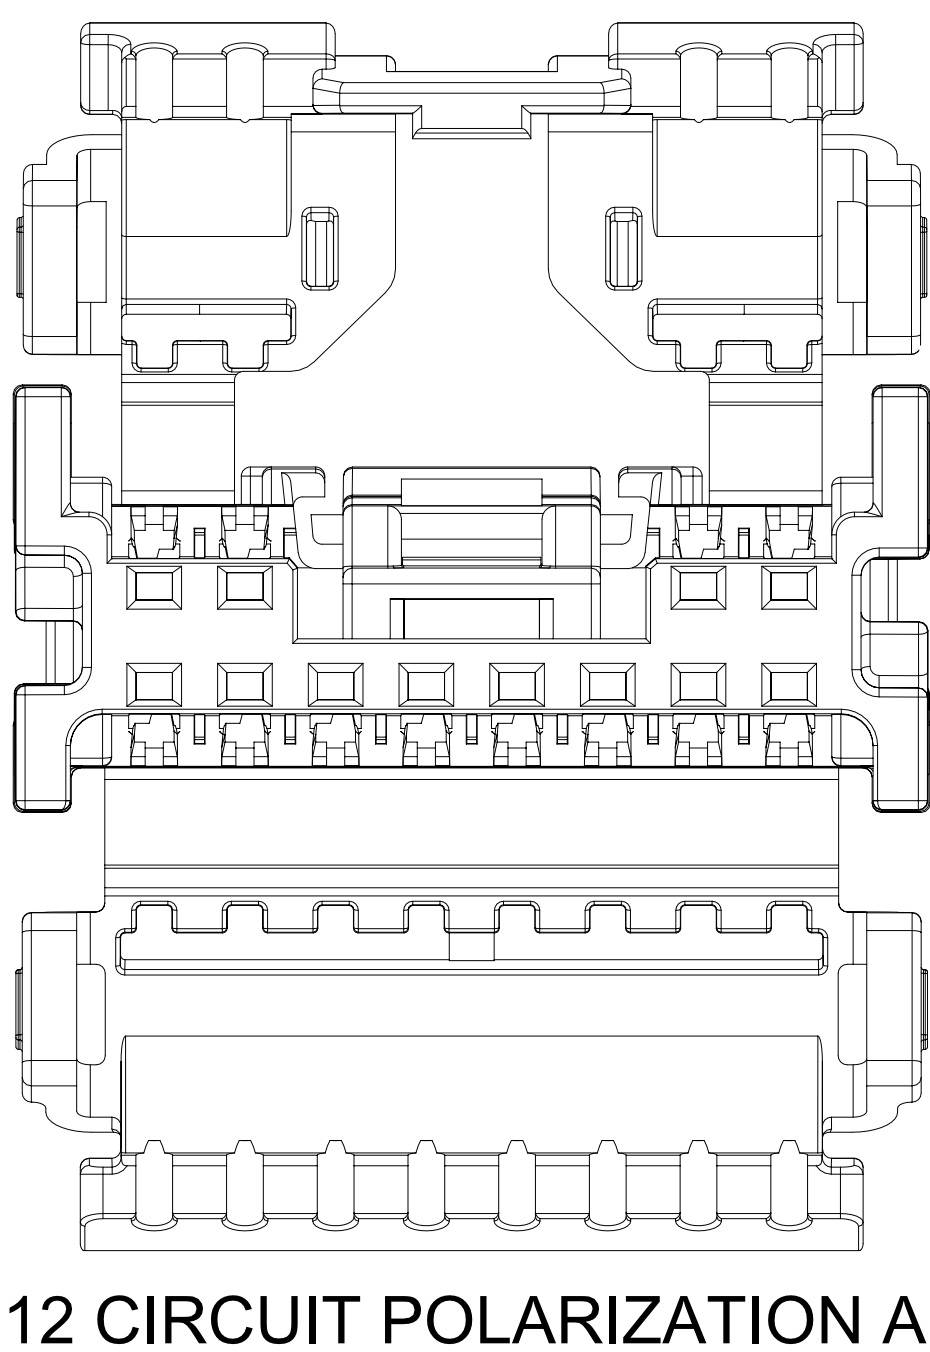


12 CIRCUIT POLARIZATION A

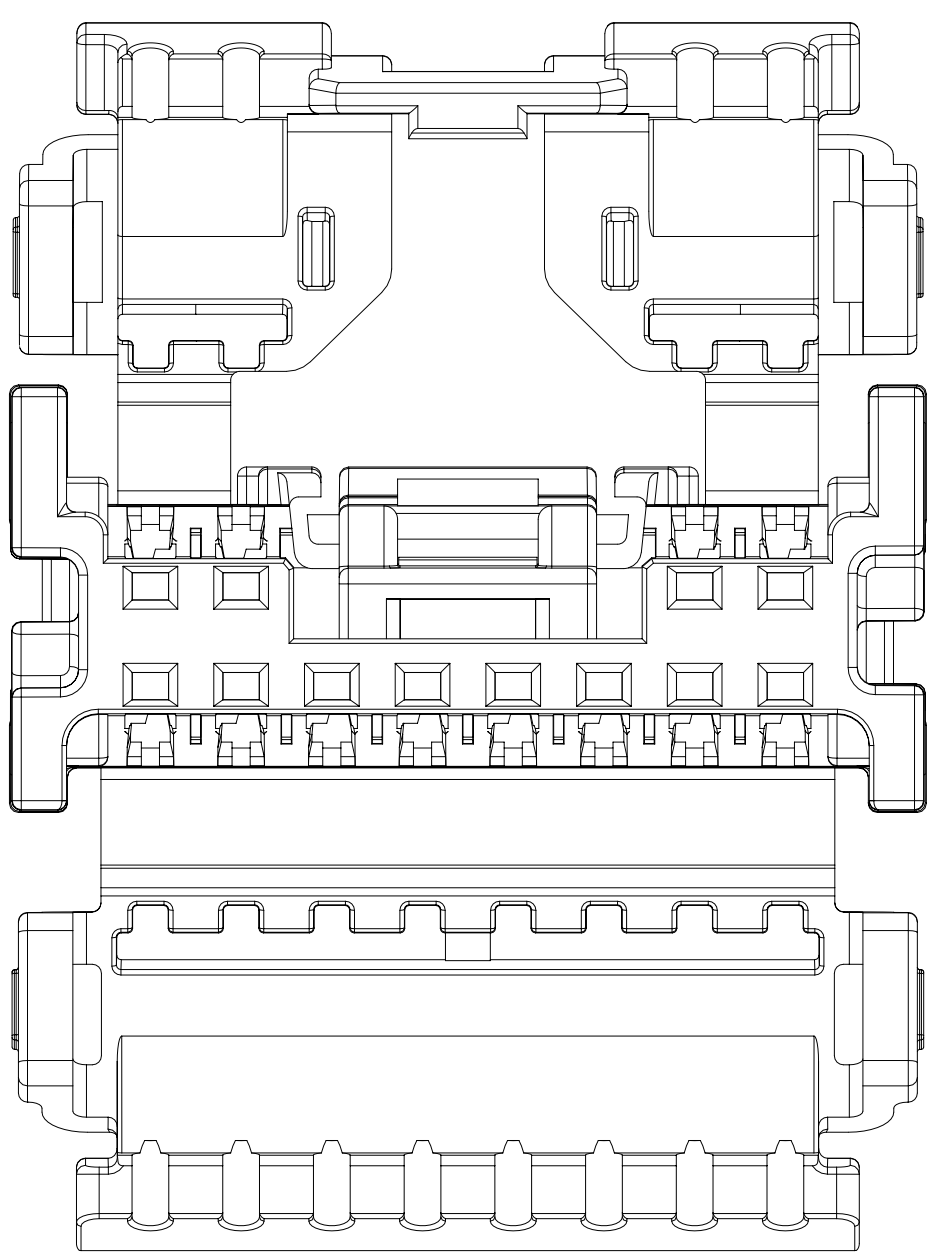


12 CIRCUIT POLARIZATION B

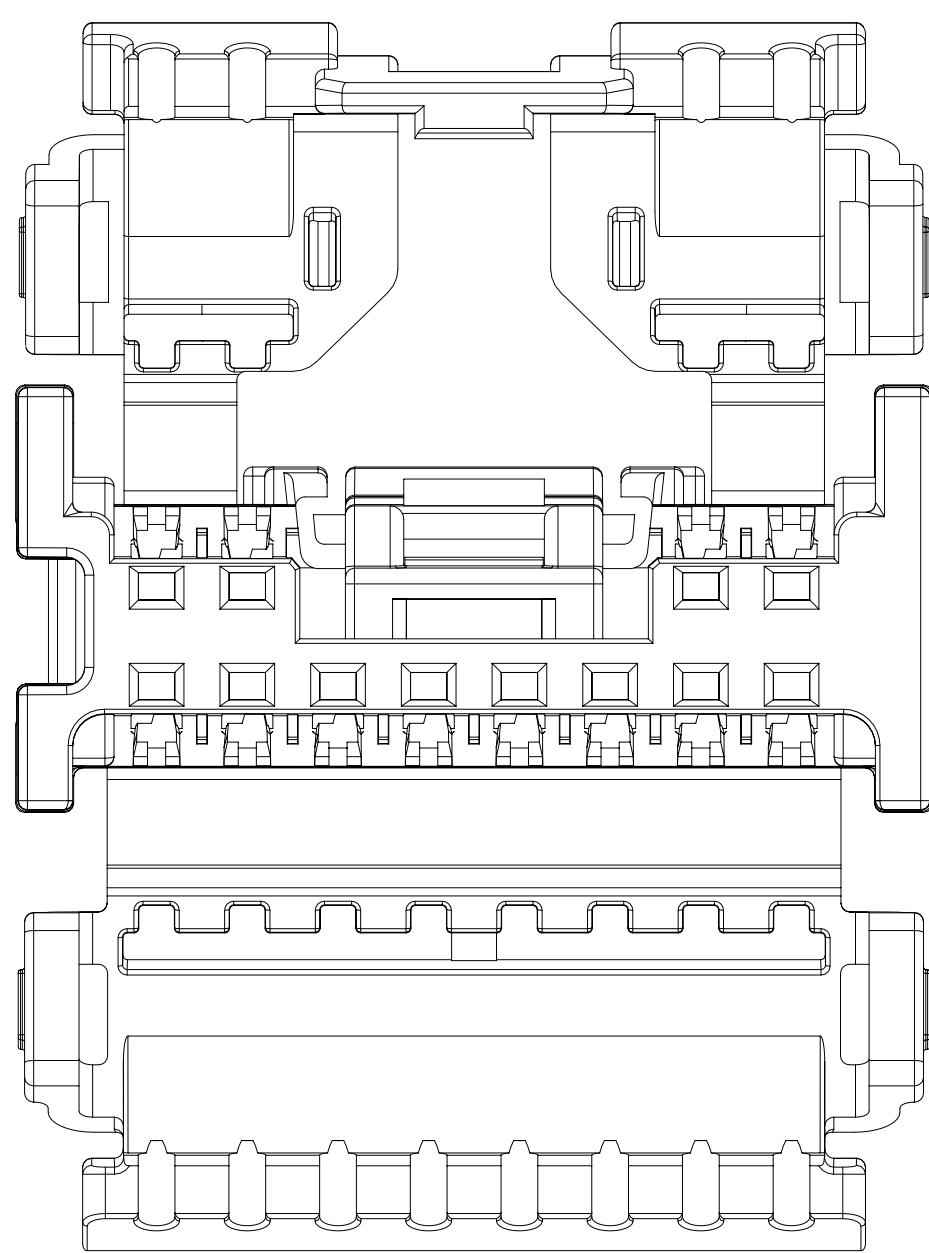


12 CIRCUIT POLARIZATION C

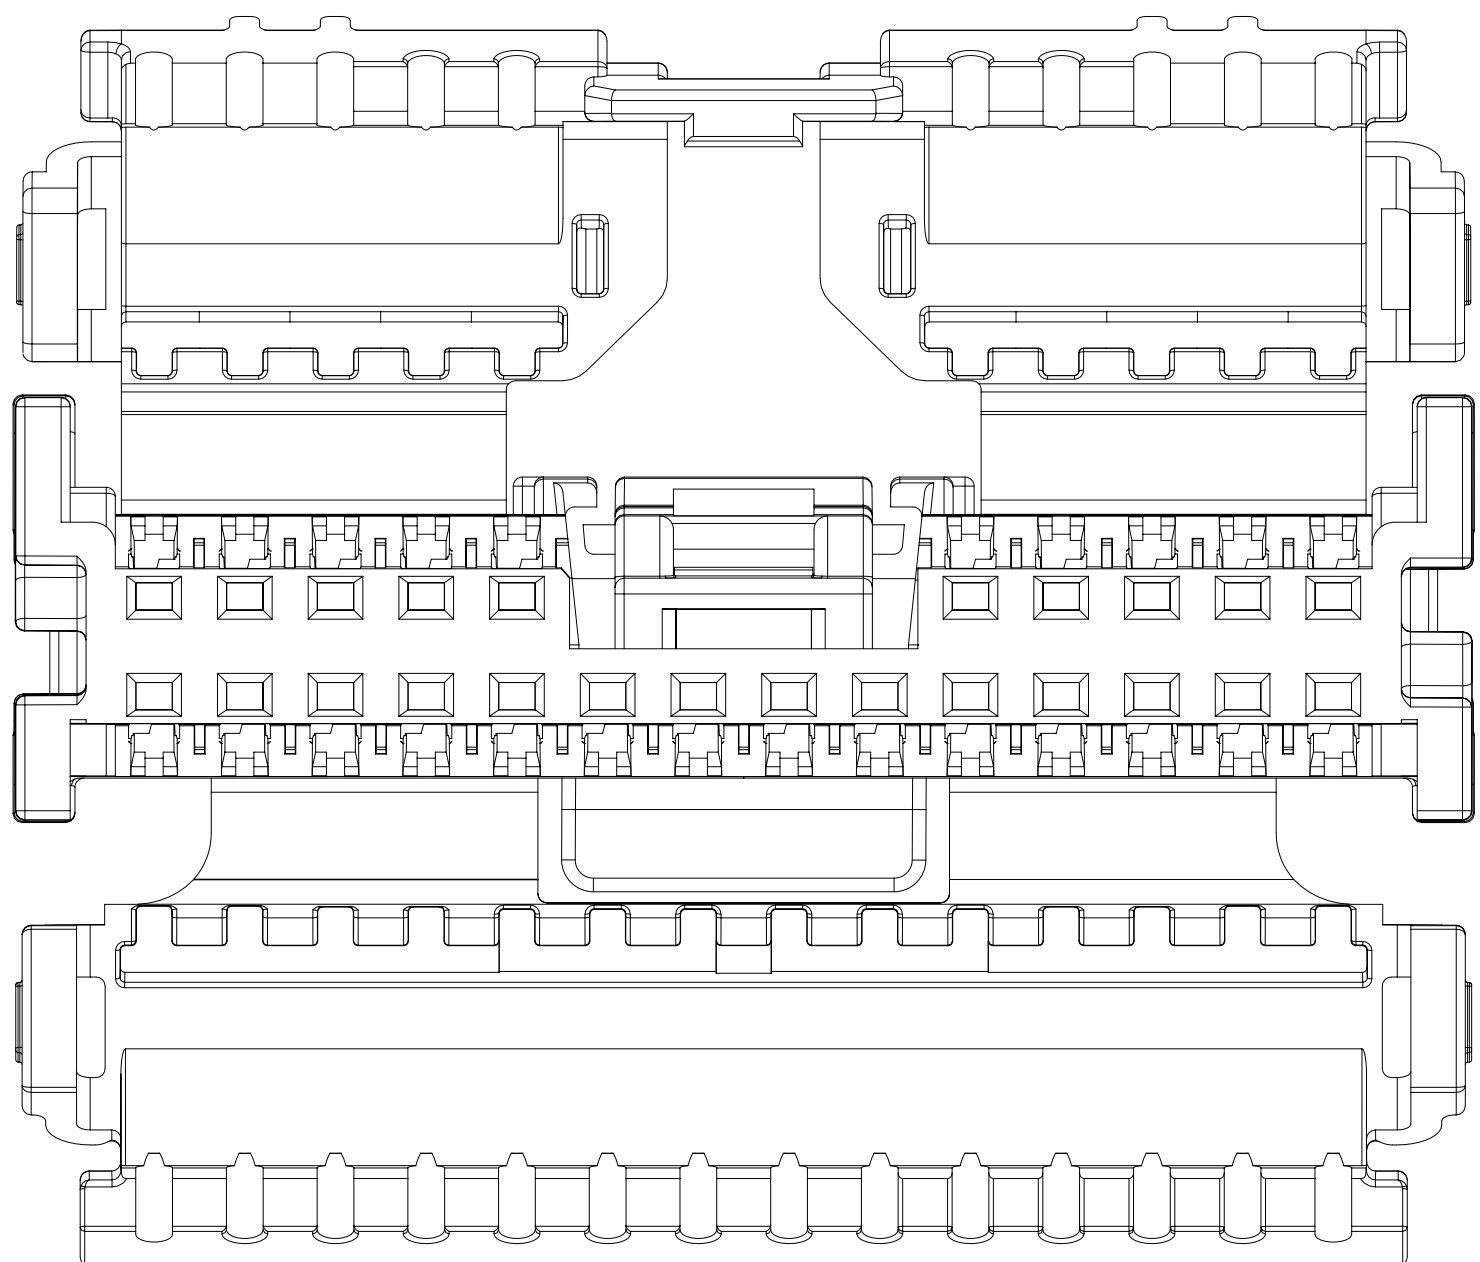


24 CIRCUIT POLARIZATION A

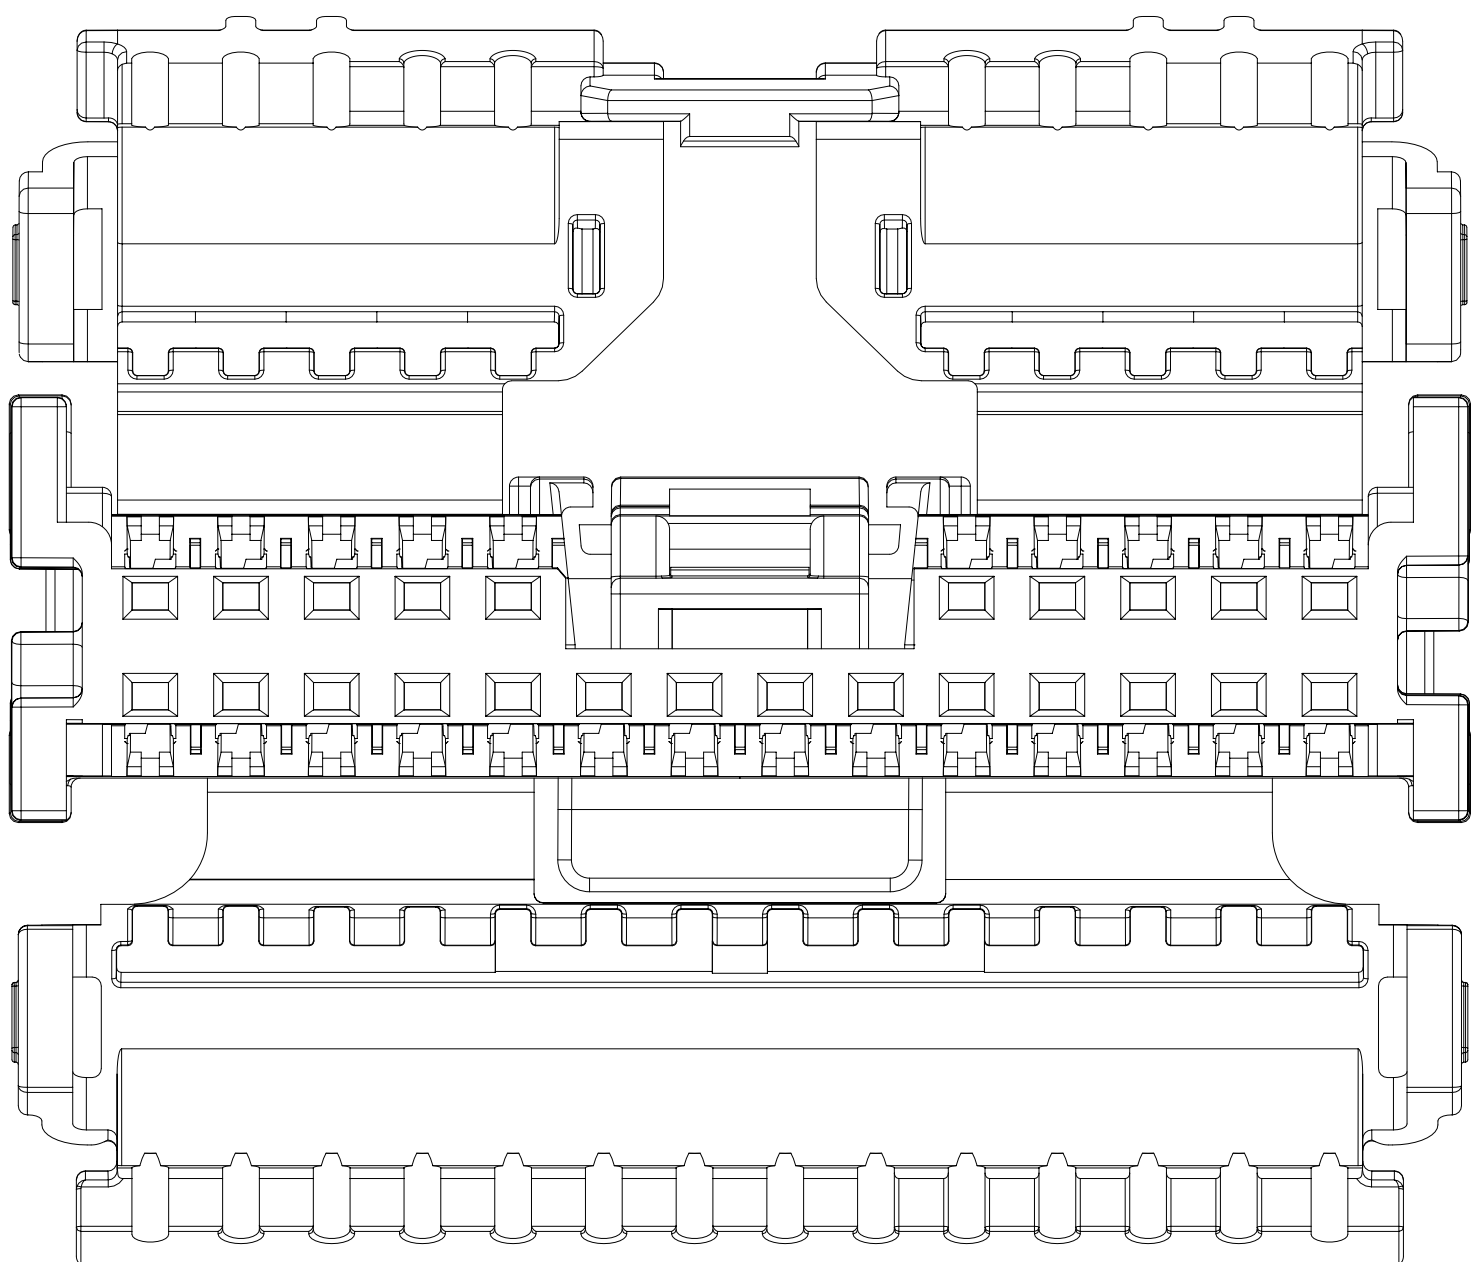

24 CIRCUIT POLARIZATION B

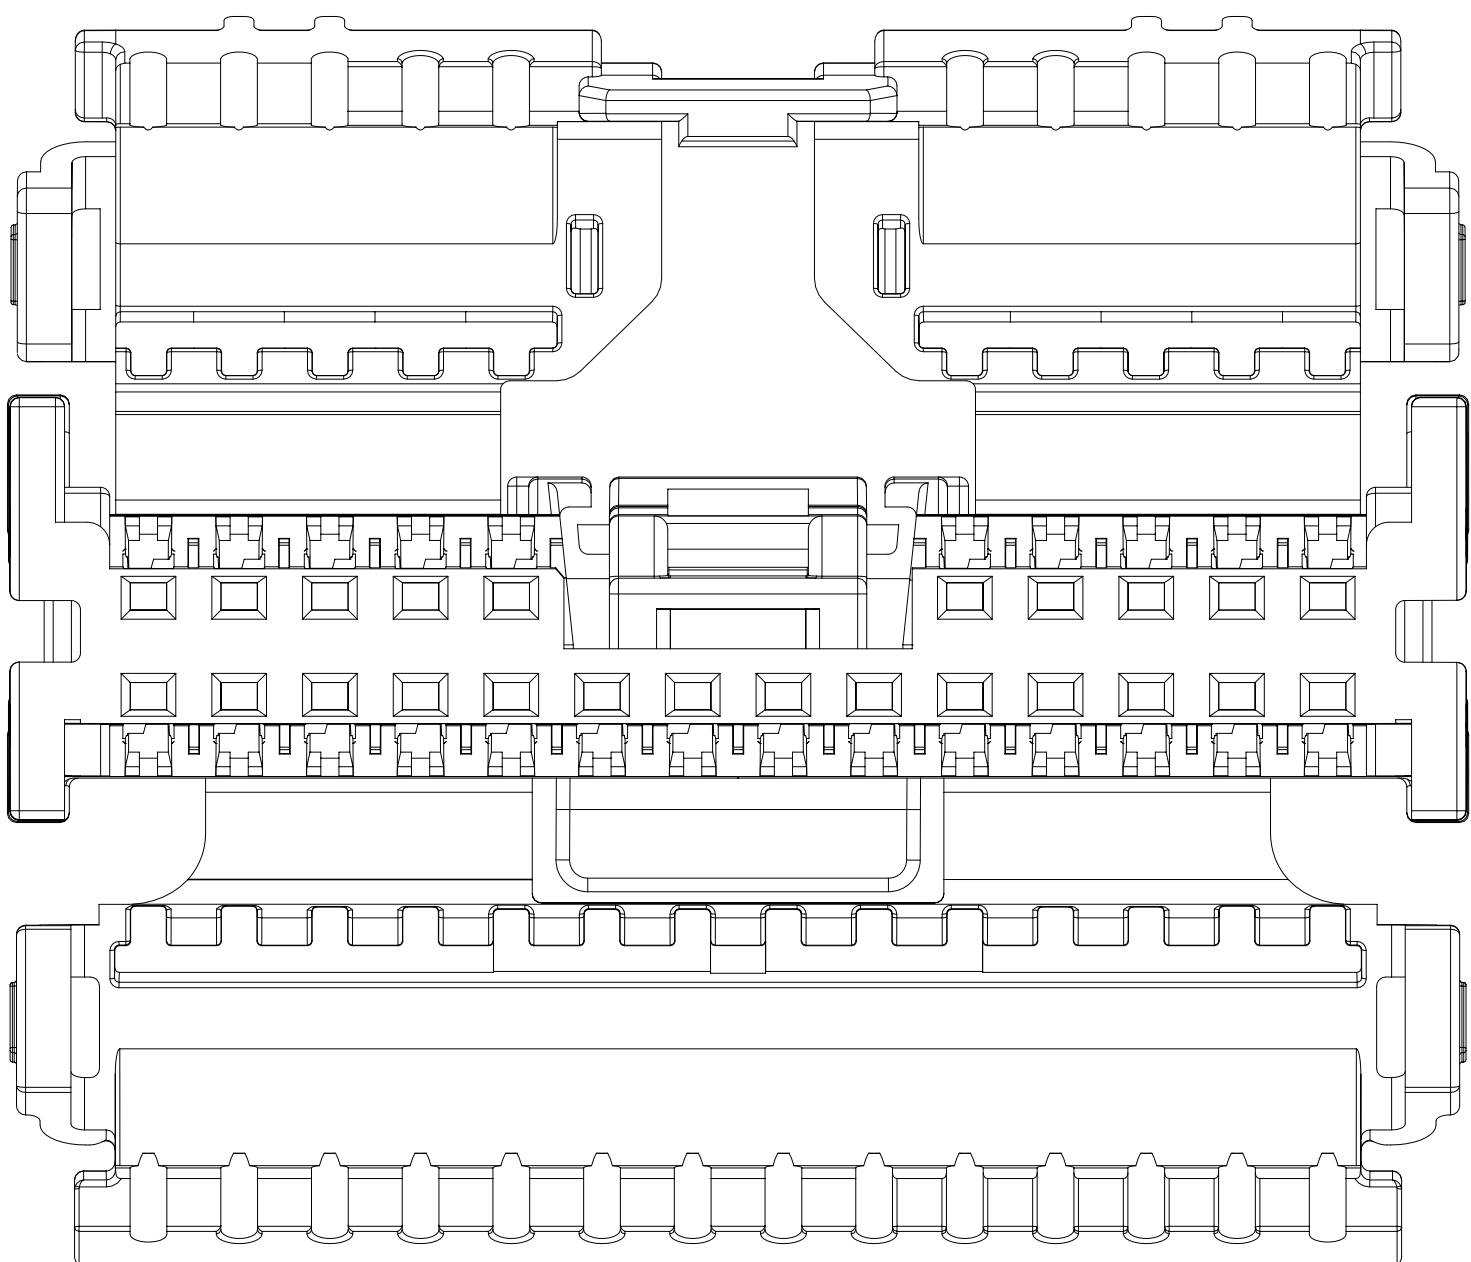


24 CIRCUIT POLARIZATION C

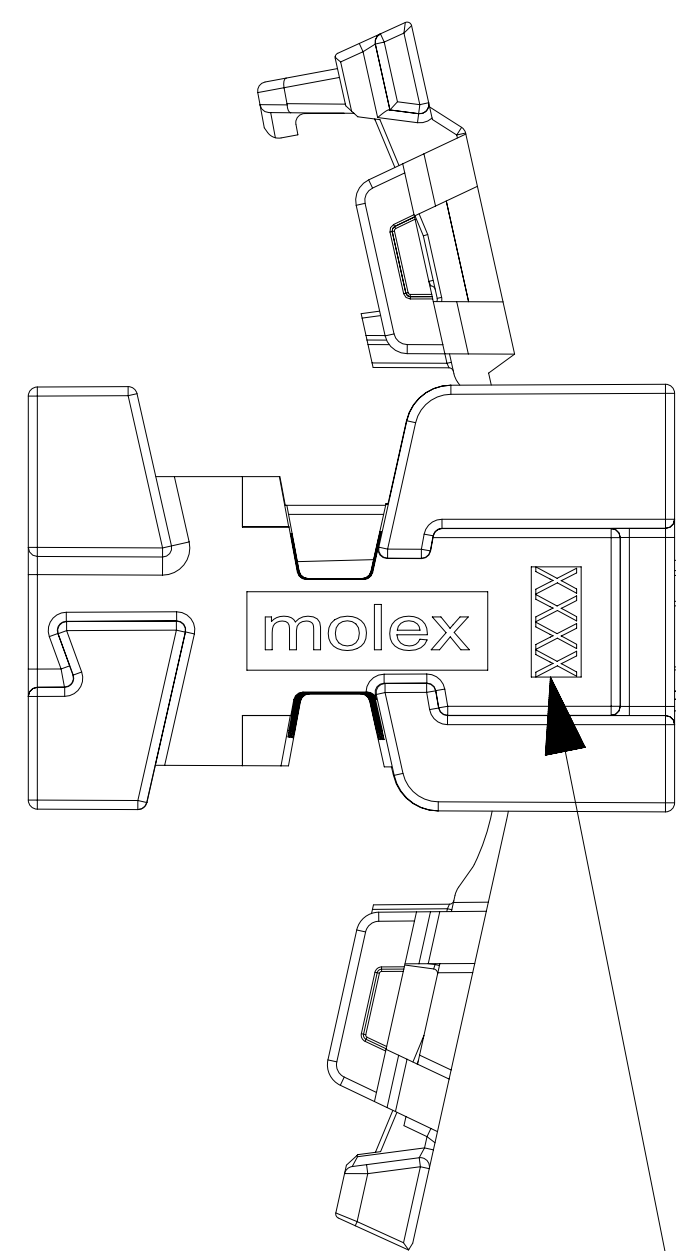


RECYCLING CODE
SEE BOM ON SHEET 3 FOR MATERIAL IDENTIFIER


CIRCUIT ID

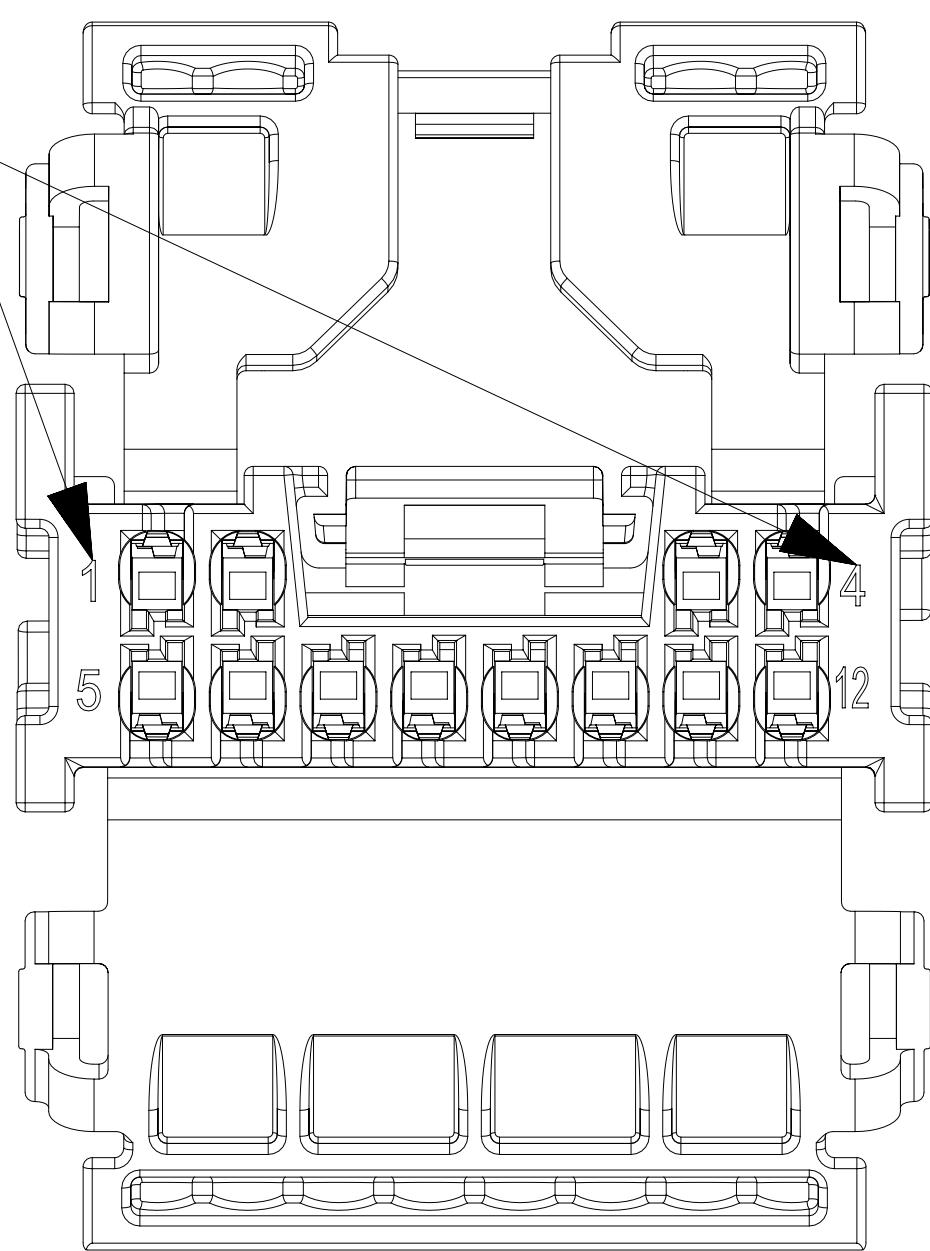

PART SERIES NUMBER

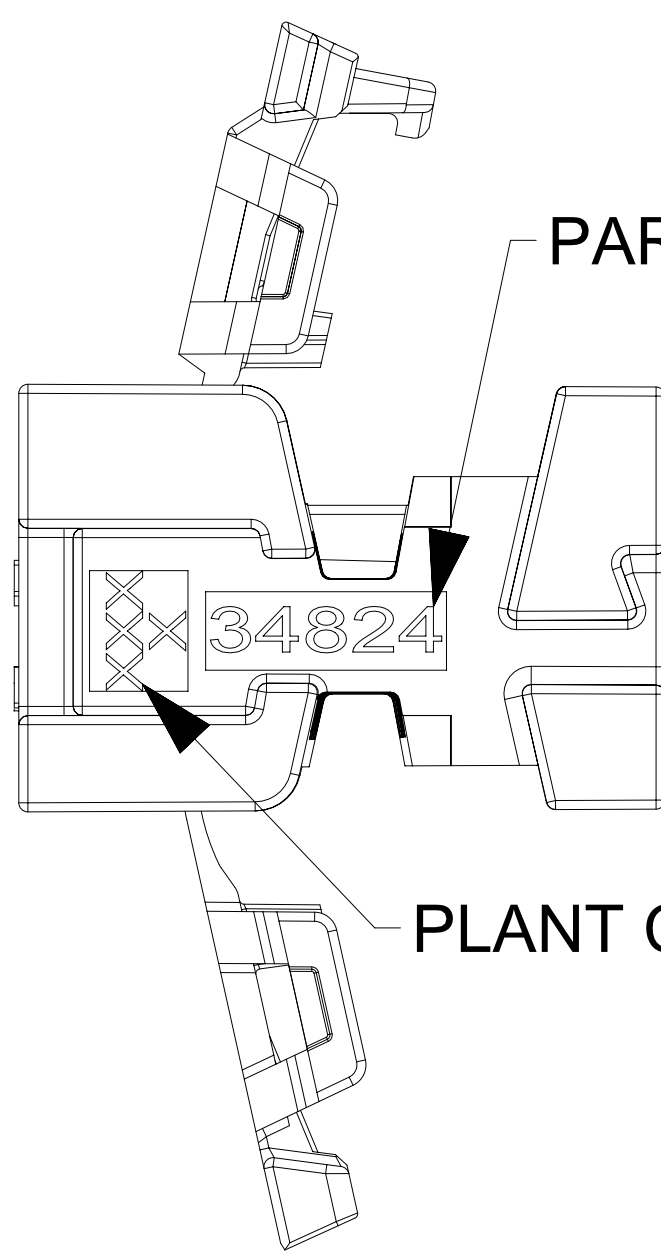


PLANT CODE & CAVITY ID

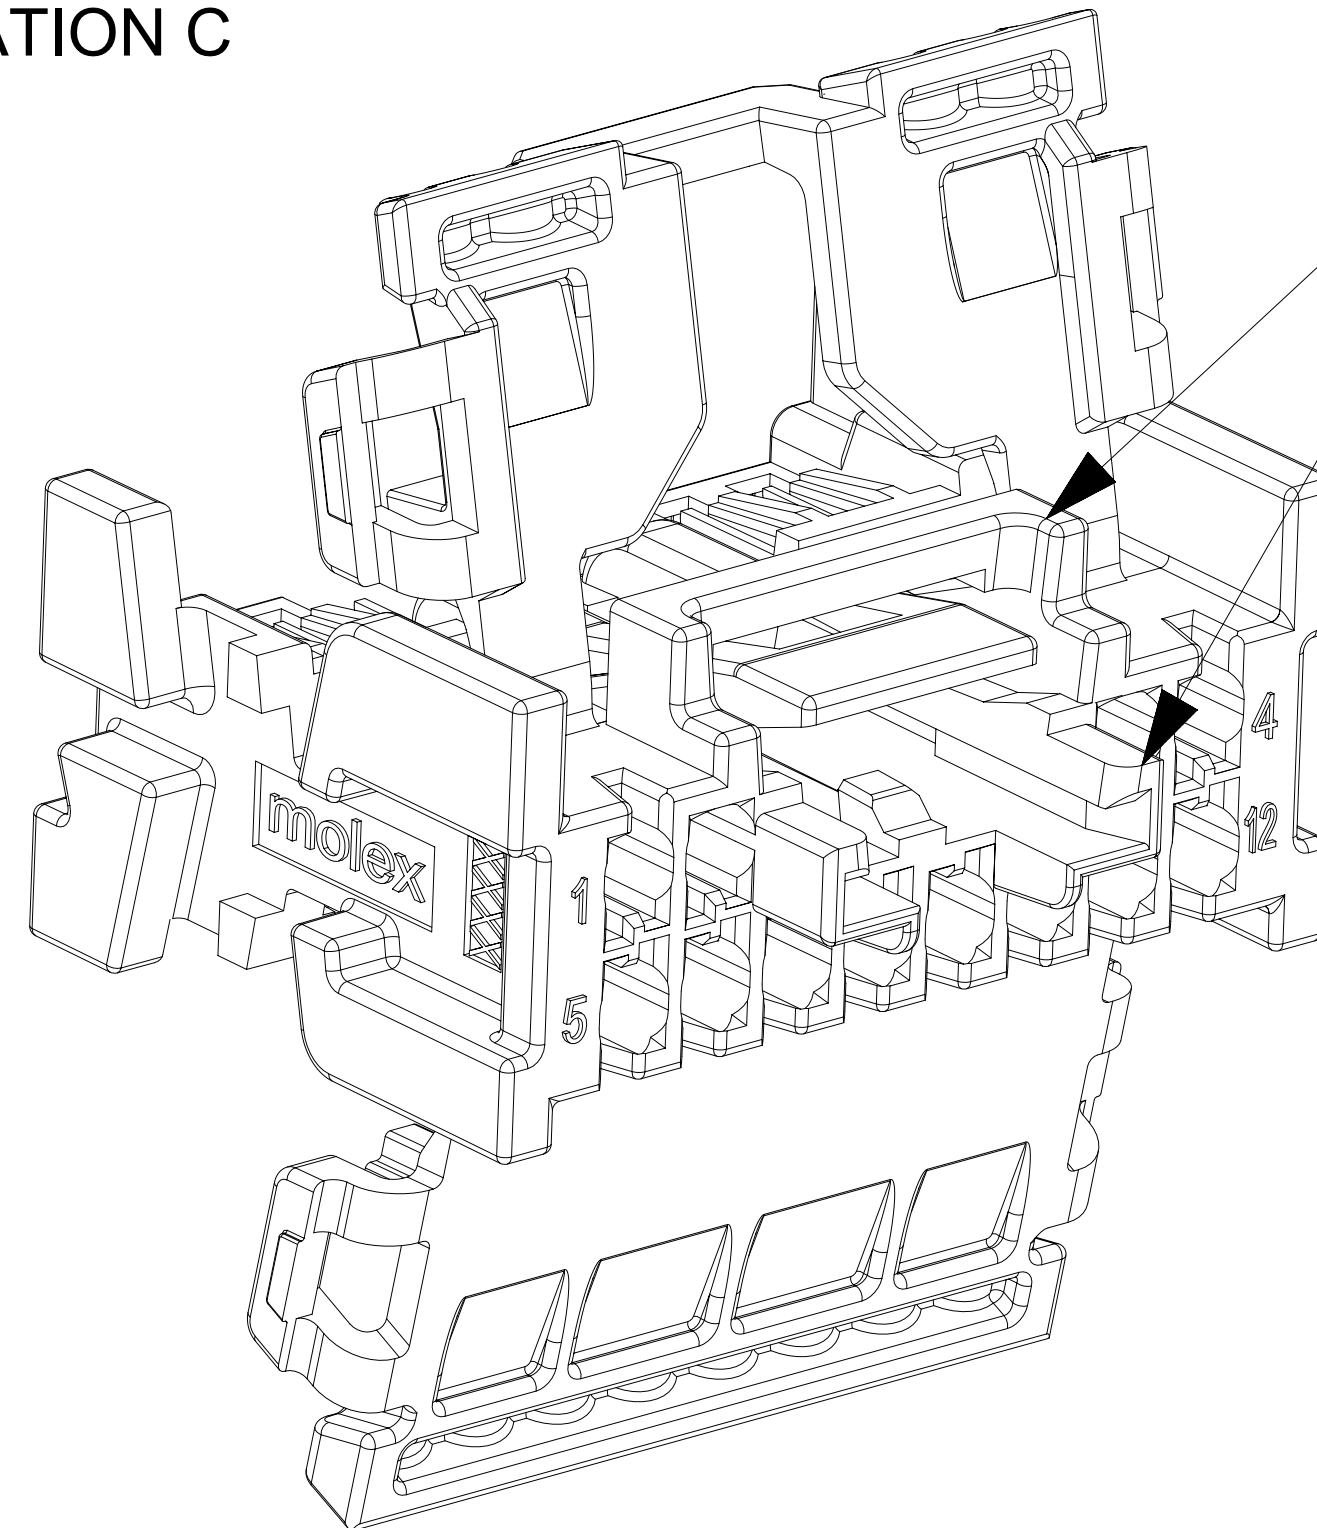

SCALE 7:1

BRIDGED OPTION

CPA TRAY
WITH BRIDGED OPTIONS

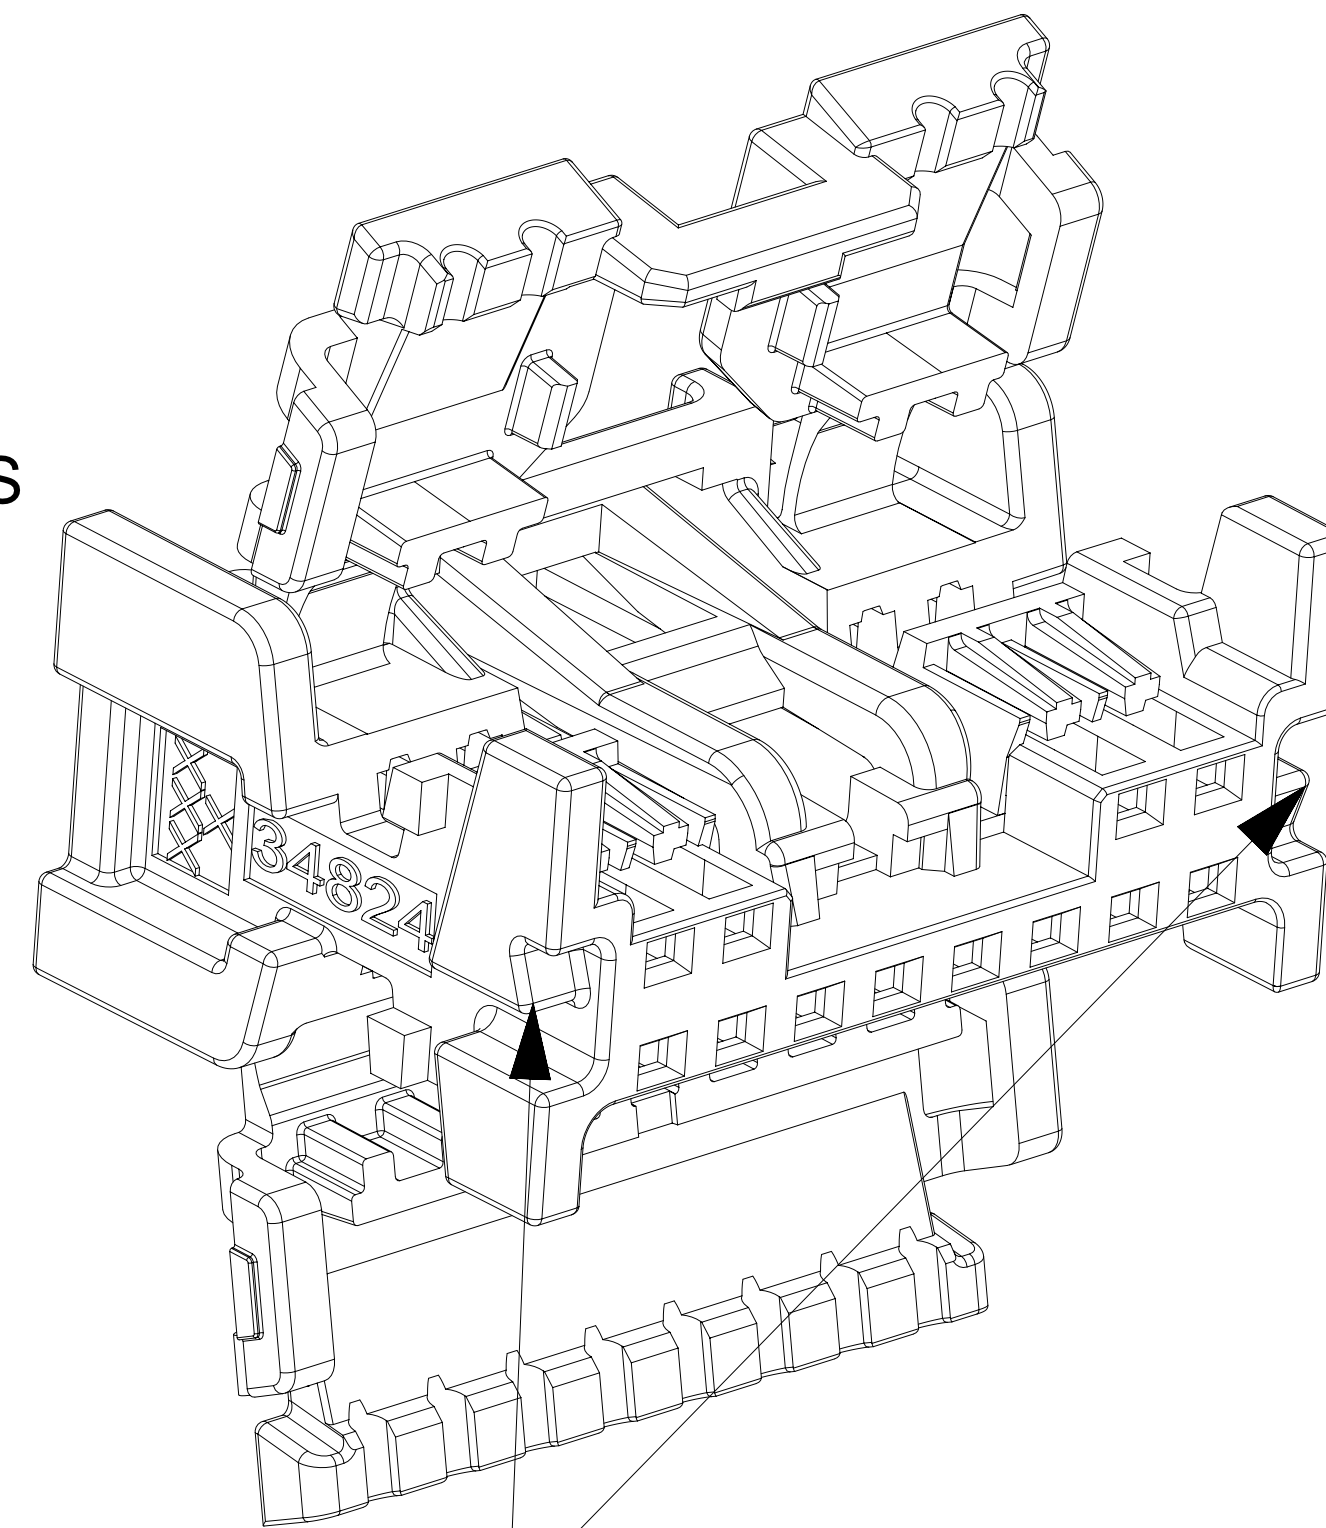

POLARIZATION FEATURES


SCALE 7:1

1. GENERAL:
- a. APPLICATION SPECIFICATION SEE: AS-34791-020
 - b. PRODUCT SPECIFICATION SEE: PS-34791-020
 - c. PACKAGING SPECIFICATION PER MOLEX DRAWING: SEE CHART
 - d. PARTS MUST BE IN COMPLIANCE TO MOLEX CHEMICAL SUBSTANCES FOR PRODUCTS AND PACKAGING SPECIFICATION: QEHS-699000-301
 - e. DATA MUST BE SUBMITTED UNDER THE MOLEX PART NUMBER TO IMDS (COMPANY ID#13255)
 - f. FLAMMABILITY REQUIREMENT: PER ISO3795 OR GM3191
 - 1. BURN RATE 100 mm/MIN MAXIMUM
 - 2. MATERIAL MUST BE SELF EXTINGUISHING
 - g. VISUAL DEFECTS SHALL MEET COSMETIC STANDARD PS-45499-002 (Class B)
 - h. FOR TERMINAL USAGE, REFER TO MOLEX SALES DRAWING SD-560023-002 (PLAN OBSOLESCENCE IN 2024) AND 5600230800.
 - j. 16-24CKT PBT PARTS PLANNED FOR OBSOLESCENCE FEB 2021
ECOPAXX VERSIONS WILL SERVE AS REPLACEMENT
2. DESIGN - MATERIALS: SEE P/N TABLE
3. DESIGN - GEOMETRY:
- a. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.
 - b. GEOMETRIC DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 2009
 - c. GENERAL TOLERANCES:
 - LINEAR: PER DIN 16901 CODE B FOR PRECISION ENGINEERING (SEE TABLE)
 - ANGULAR: $\pm 3^\circ$
 - d. EDGES AND UNDIMENSIONED DETAILS PER ISO13715
 - e. CORNERS SHOWN AS SHARP TO BE R 0.2 MAX
 - f. LETTERING SHALL BE 0.1 MAX RAISED IN 0.15 MAX RECESS PAD AND NOT PROTRUDE THE SURFACE. THIS INCLUDES RECYCLING CODE, PLANT AND CAVITY ID, VENDOR ID, CIRCUIT ID, AND PART SERIES NUMBER.
 - g. DIMENSION APPLIES ONLY TO RECEPTACLES WITH LOCK BRIDGE OPTION.
 - h. DIM 9 & 12 TOLERANCE $+0.30/-0.15$ FOR ALL PA410 RECEPTACLES 16-24CKT.


INSPECTION BALLOON LOG		L9	ADDED TERMINAL SD-DRAWING 5600230800 AT NOTES 1-H ON SHEET 1
PER DRAWING REVISION: L9		L8	CHANGED RECYCLING CODE TO "XXXX"; WAS "PBT."
LAST BALLOON USED: 17		L7	OBSOLETE PART NUMBERS 348241200/01/02/40/41/42, 348241160/01/02, 348240160/01/02
ADDED BALLOON NUMBERS:		L6	DRAWING REMASTERED
REMOVED BALLOON NUMBERS: 1-7		L5	PAGE 1: ADDED NOTE 1)
		L4	PAGE 3: ADDED NOTE SYMBOL TO BOM
		L3	VERTICAL PITCH DIMENSION ADDED
		L2	UPDATED PIN TABLE TO SHOW MATERIAL
		L1	UPDATED 24CKT DESCRIPTION

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex			
	MM	6:1									
	GENERAL TOLERANCES (UNLESS SPECIFIED)										
	ANGULAR TOL ± 0.5°										
4 PLACES ±											
DIVISIONAL SYMBOLS	3 PLACES ±		STATUS: Production DRWN: Yann Chen 2023-10-20 CHK'D: Gang Li 2023-10-25 APPR: Colin Zhang 2023-10-30			PRODUCT SALES DRAWING DOCUMENT NUMBER DOC TYPE DOC PART REVISION SD-34824-002 PSD 001 L9					
	2 PLACES ± 0.100										
	1 PLACE ± 0.20										
	0 PLACES ±										
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
		E-SIZE		34824				GENERAL MARKET		1 OF 3	


12 CIRCUIT

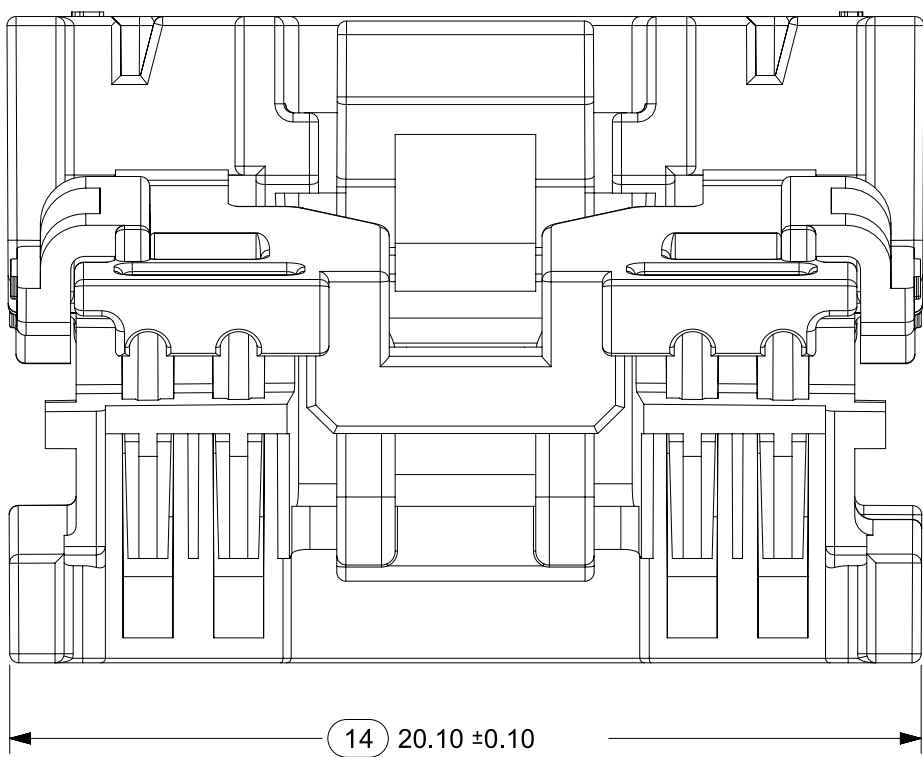











16 CIRCUIT

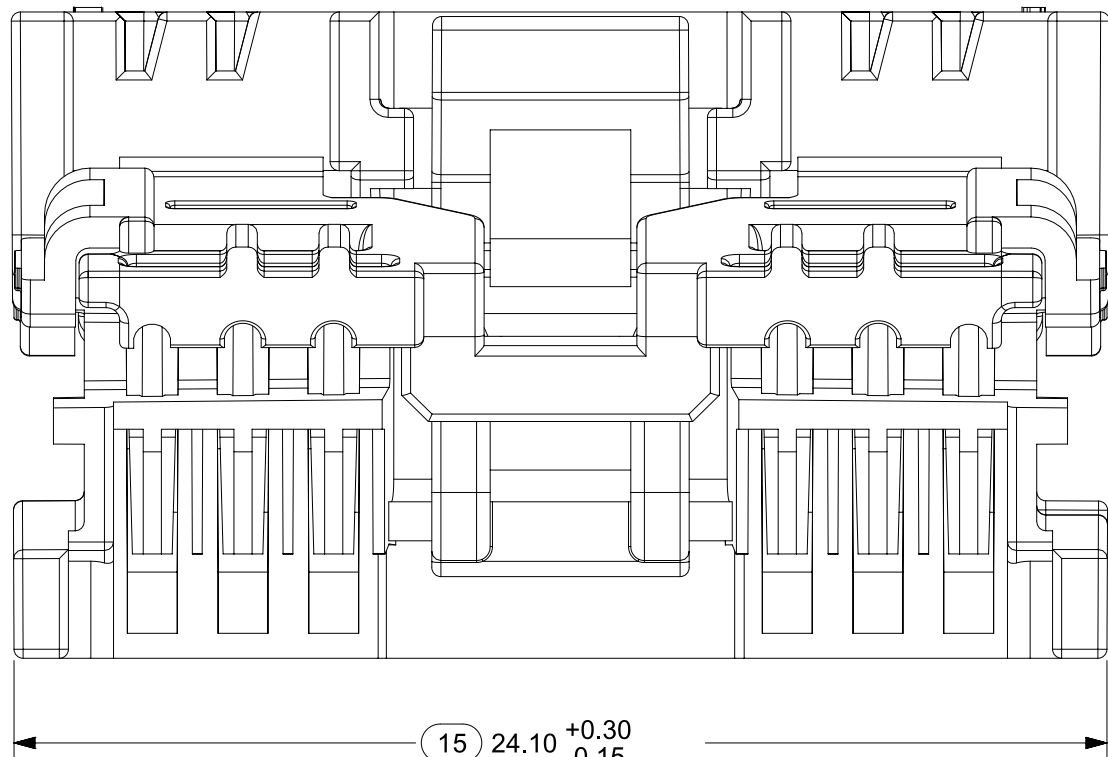

20 CIRCUIT

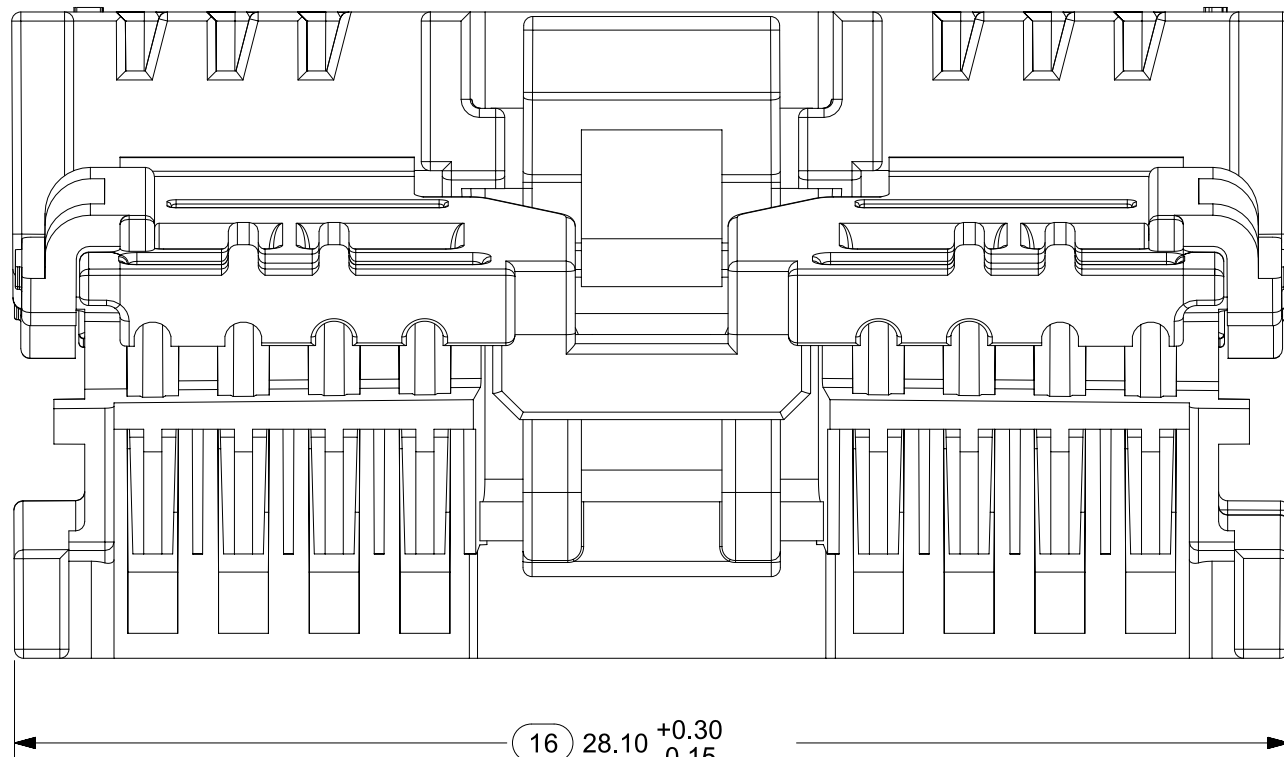

24 CIRCUIT

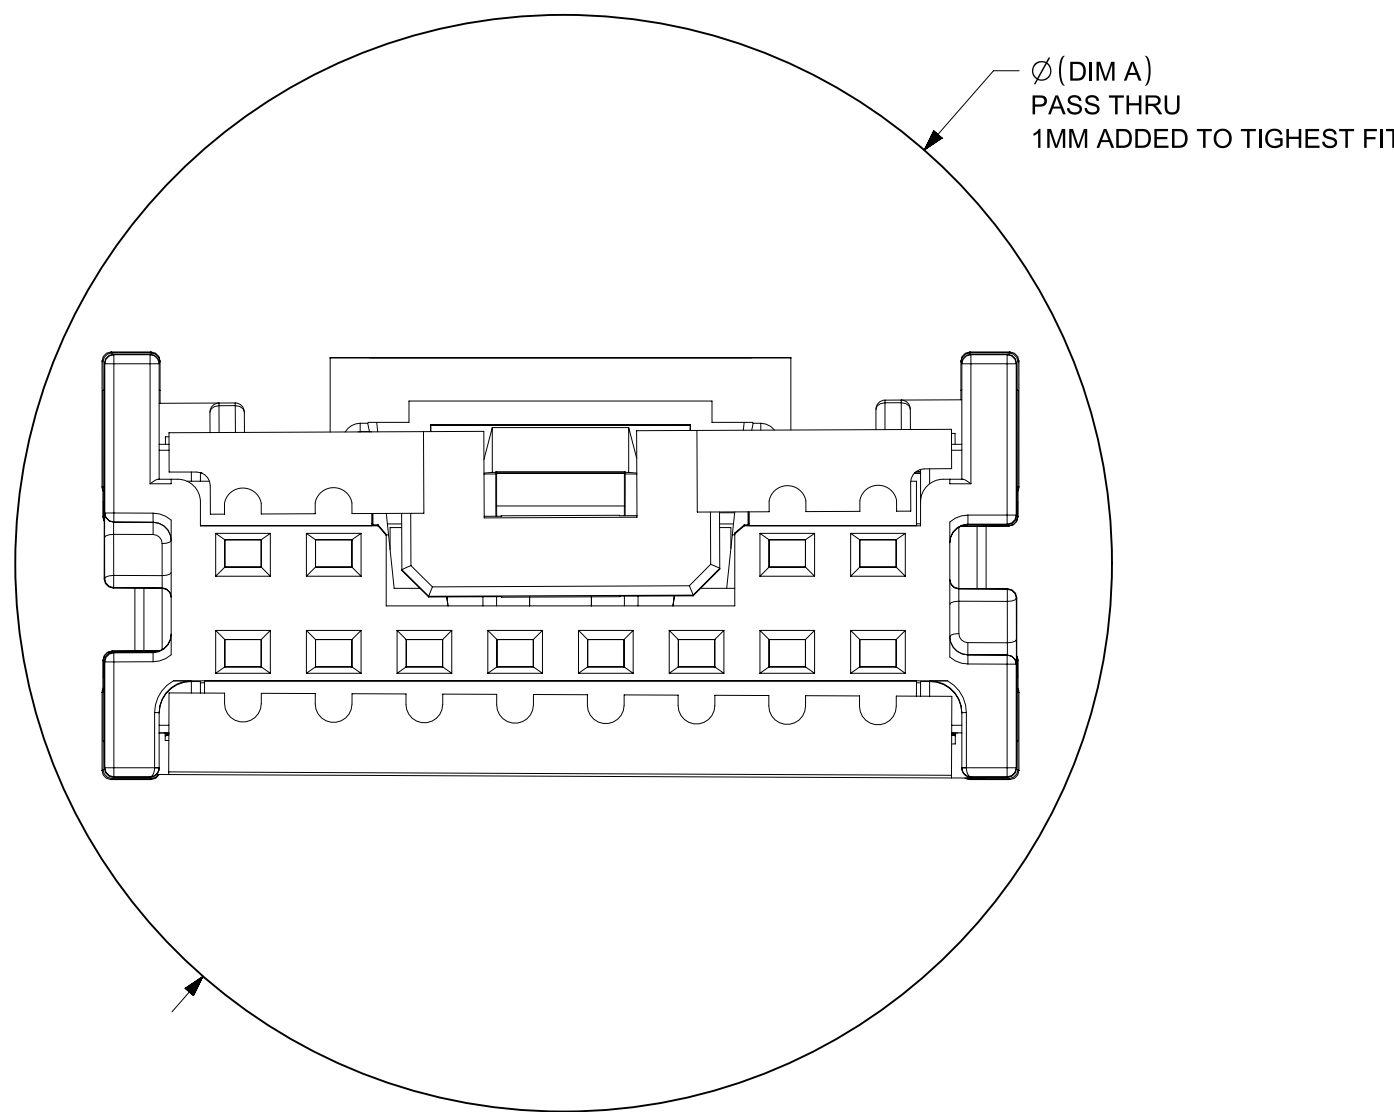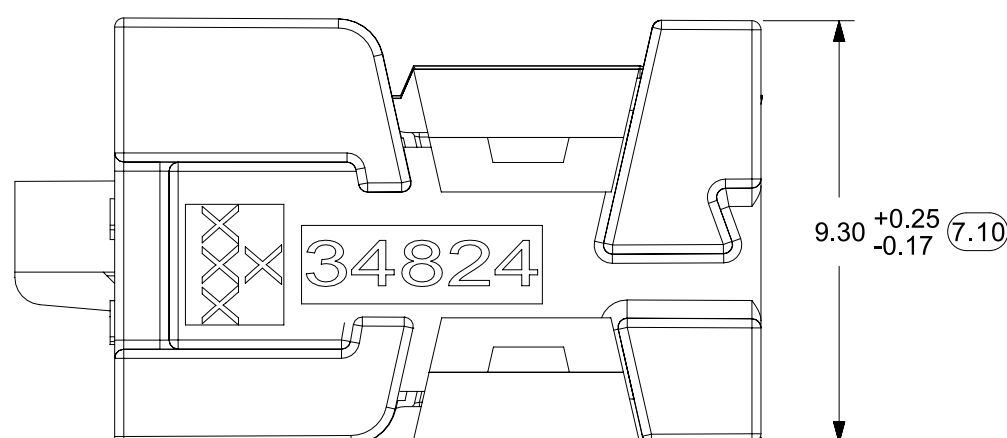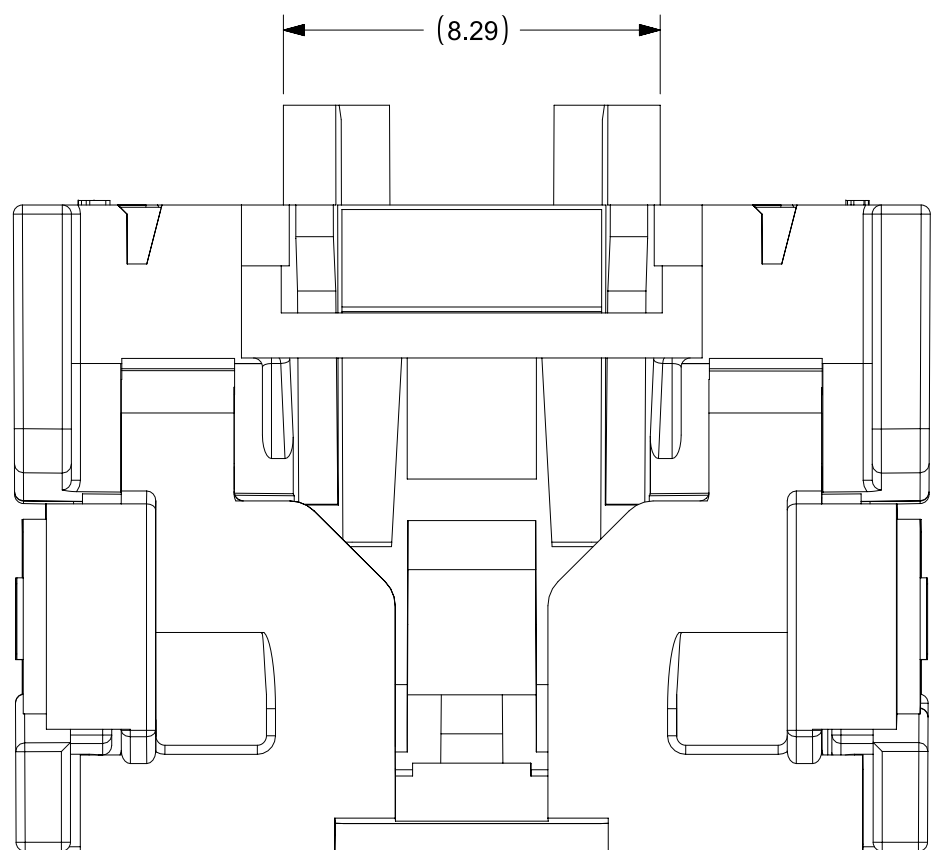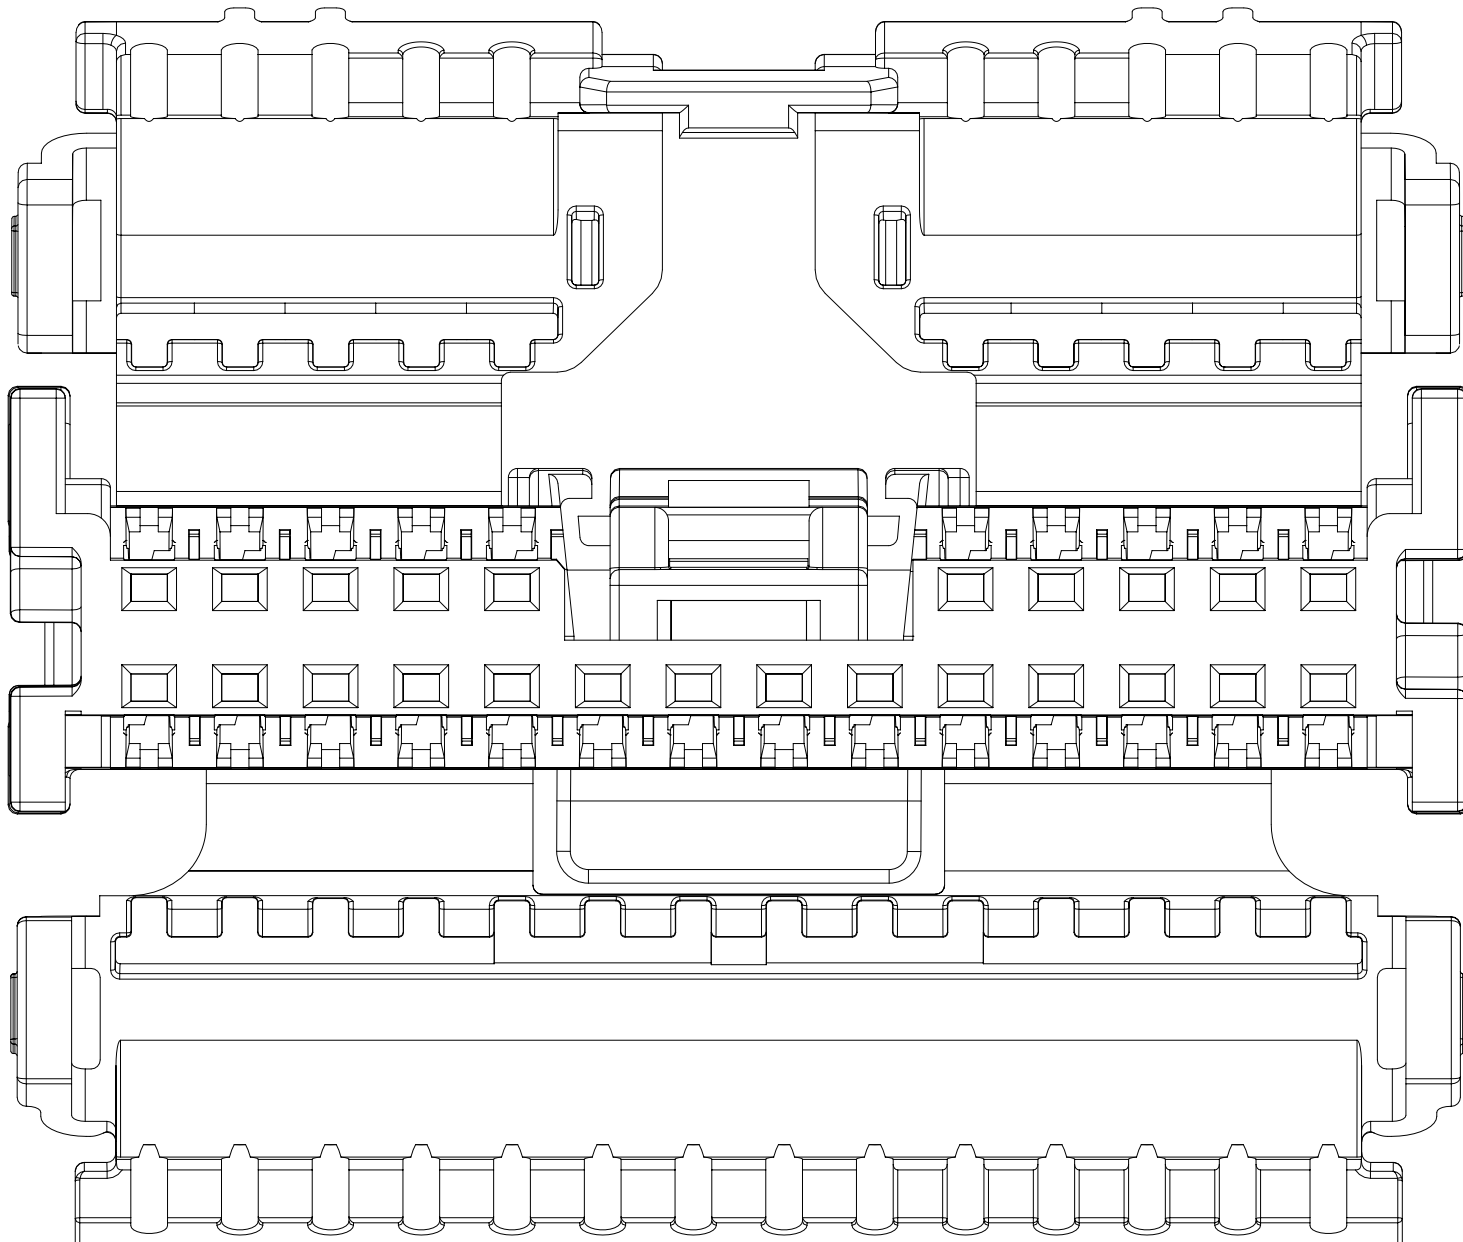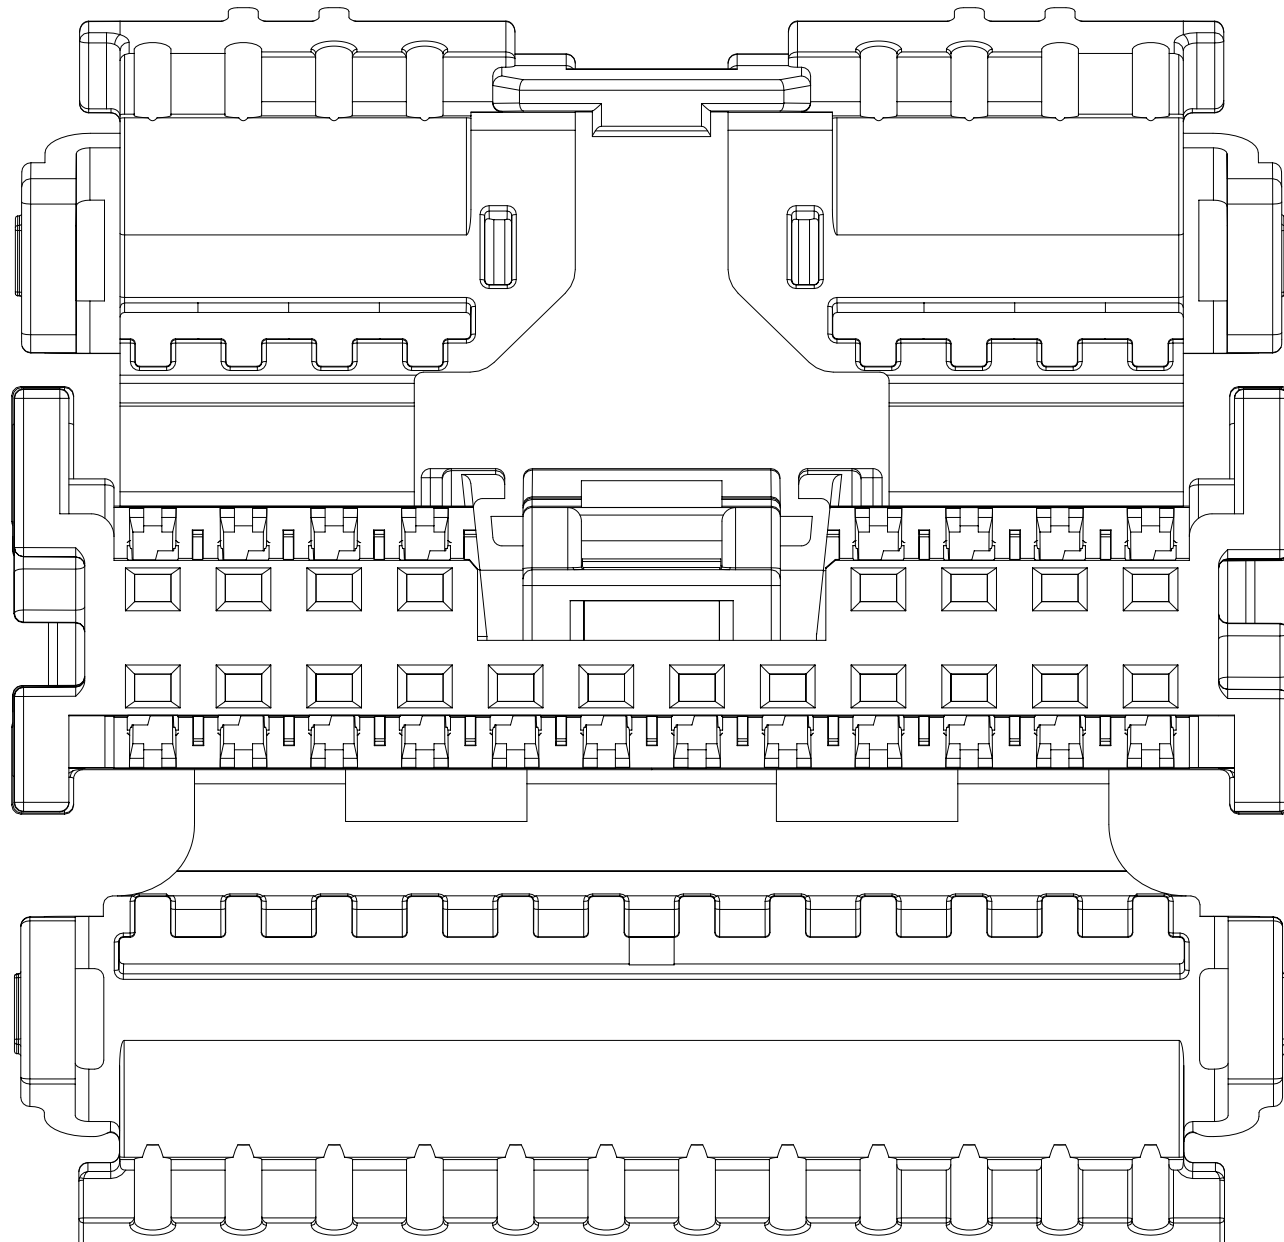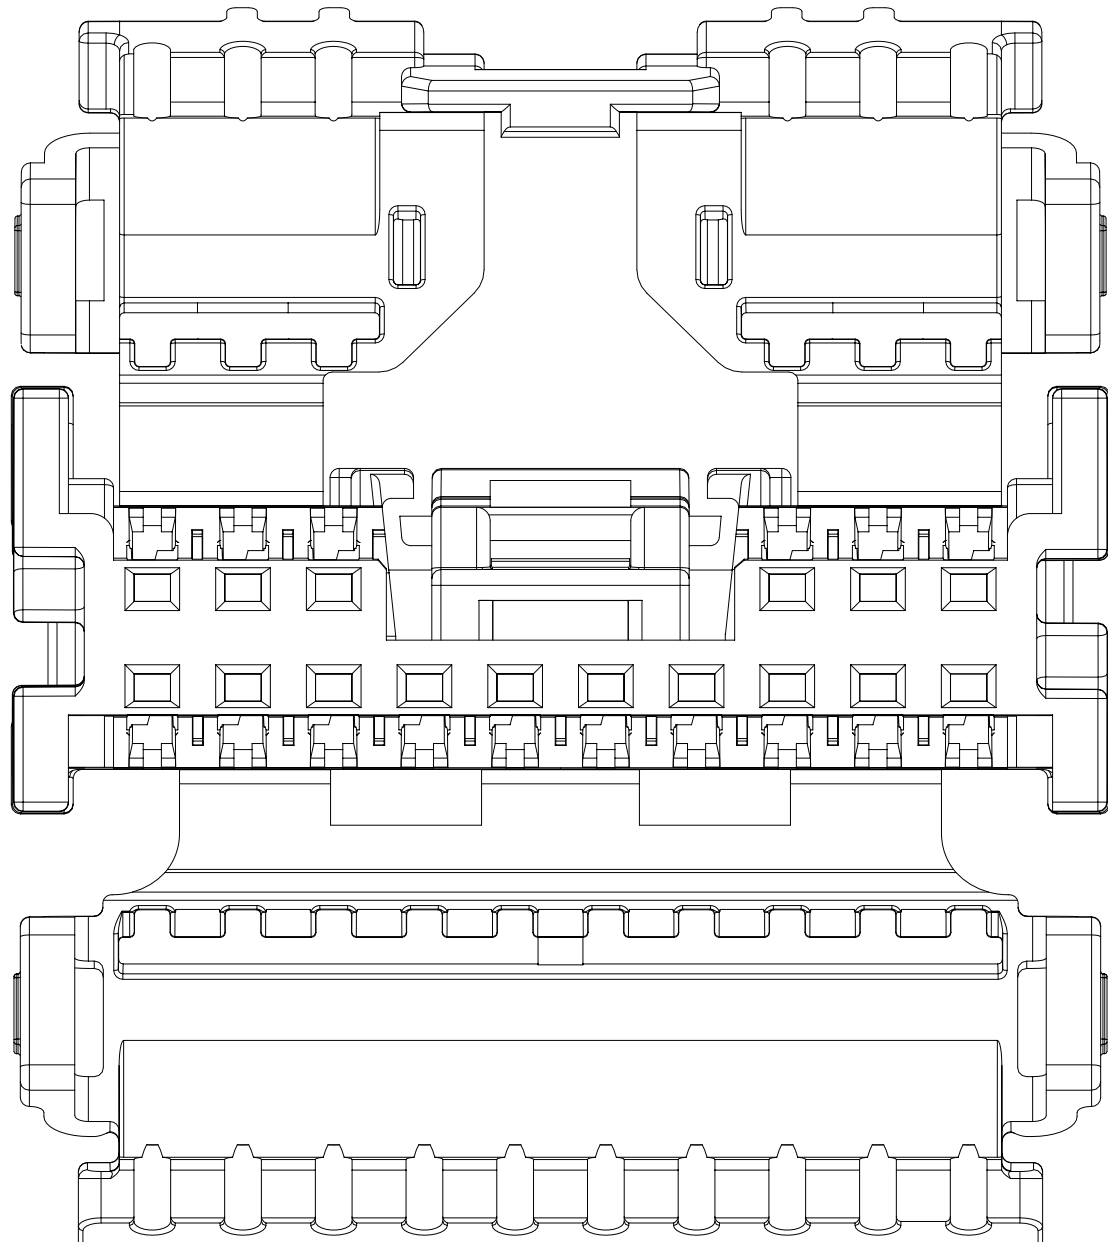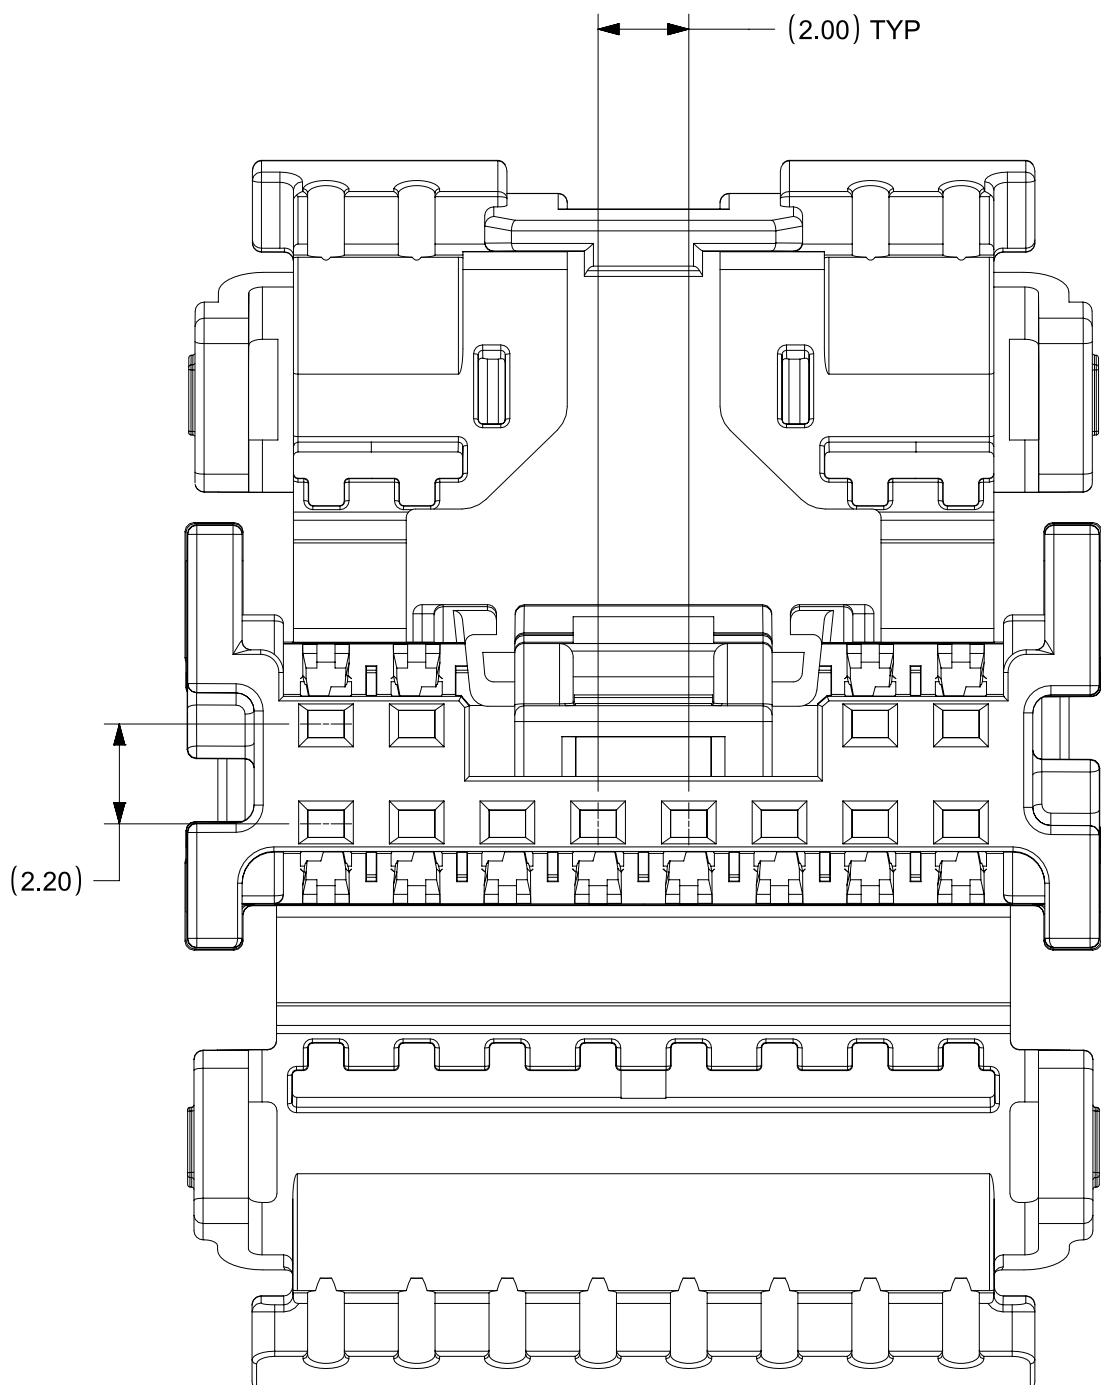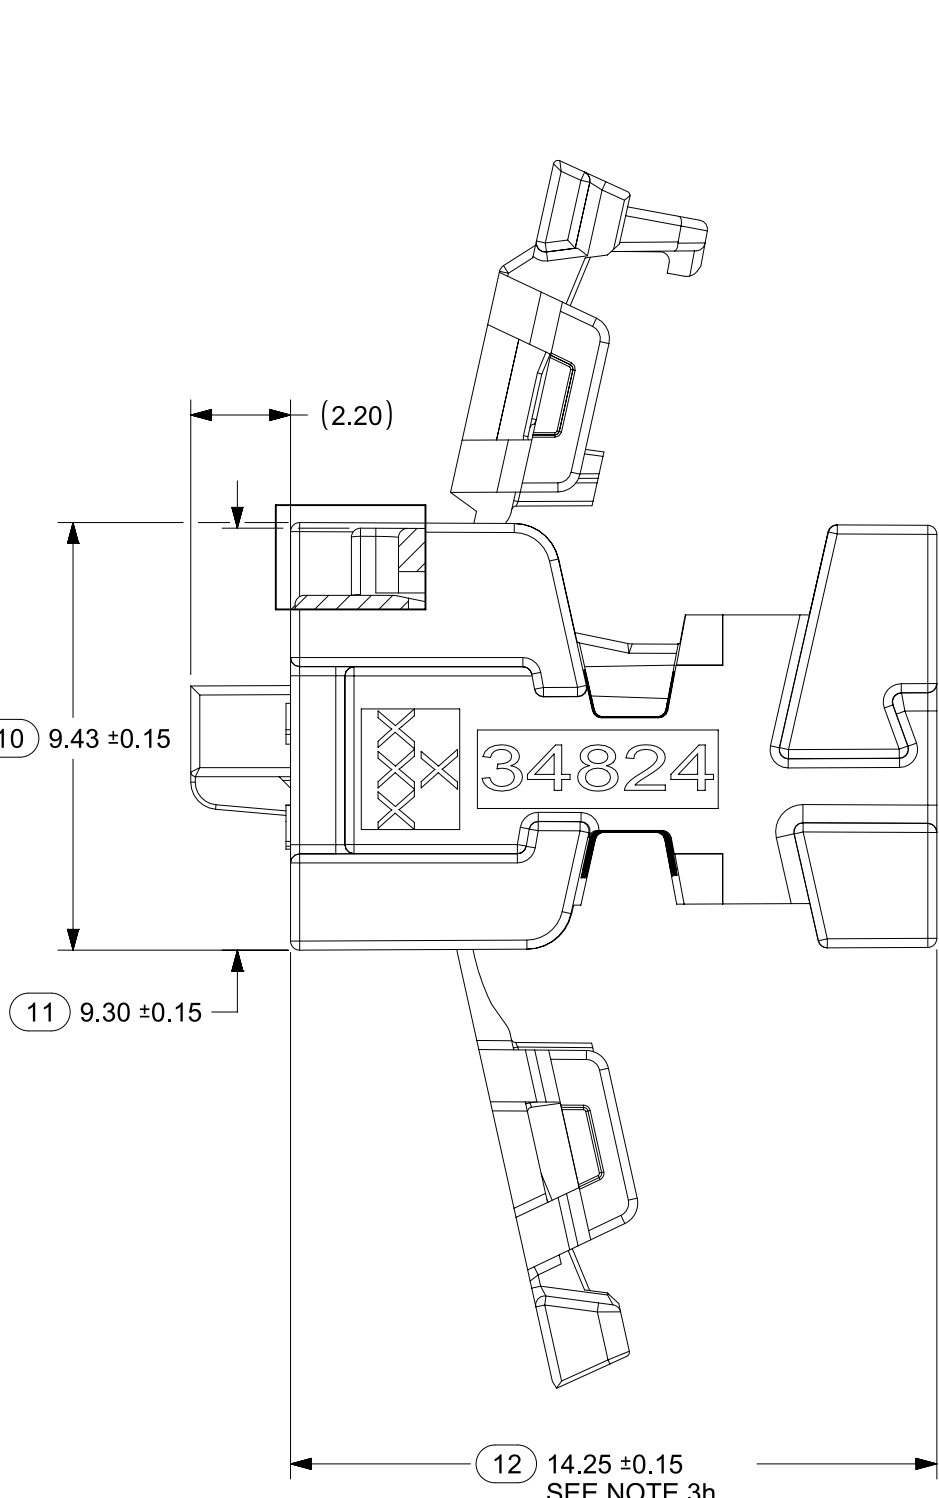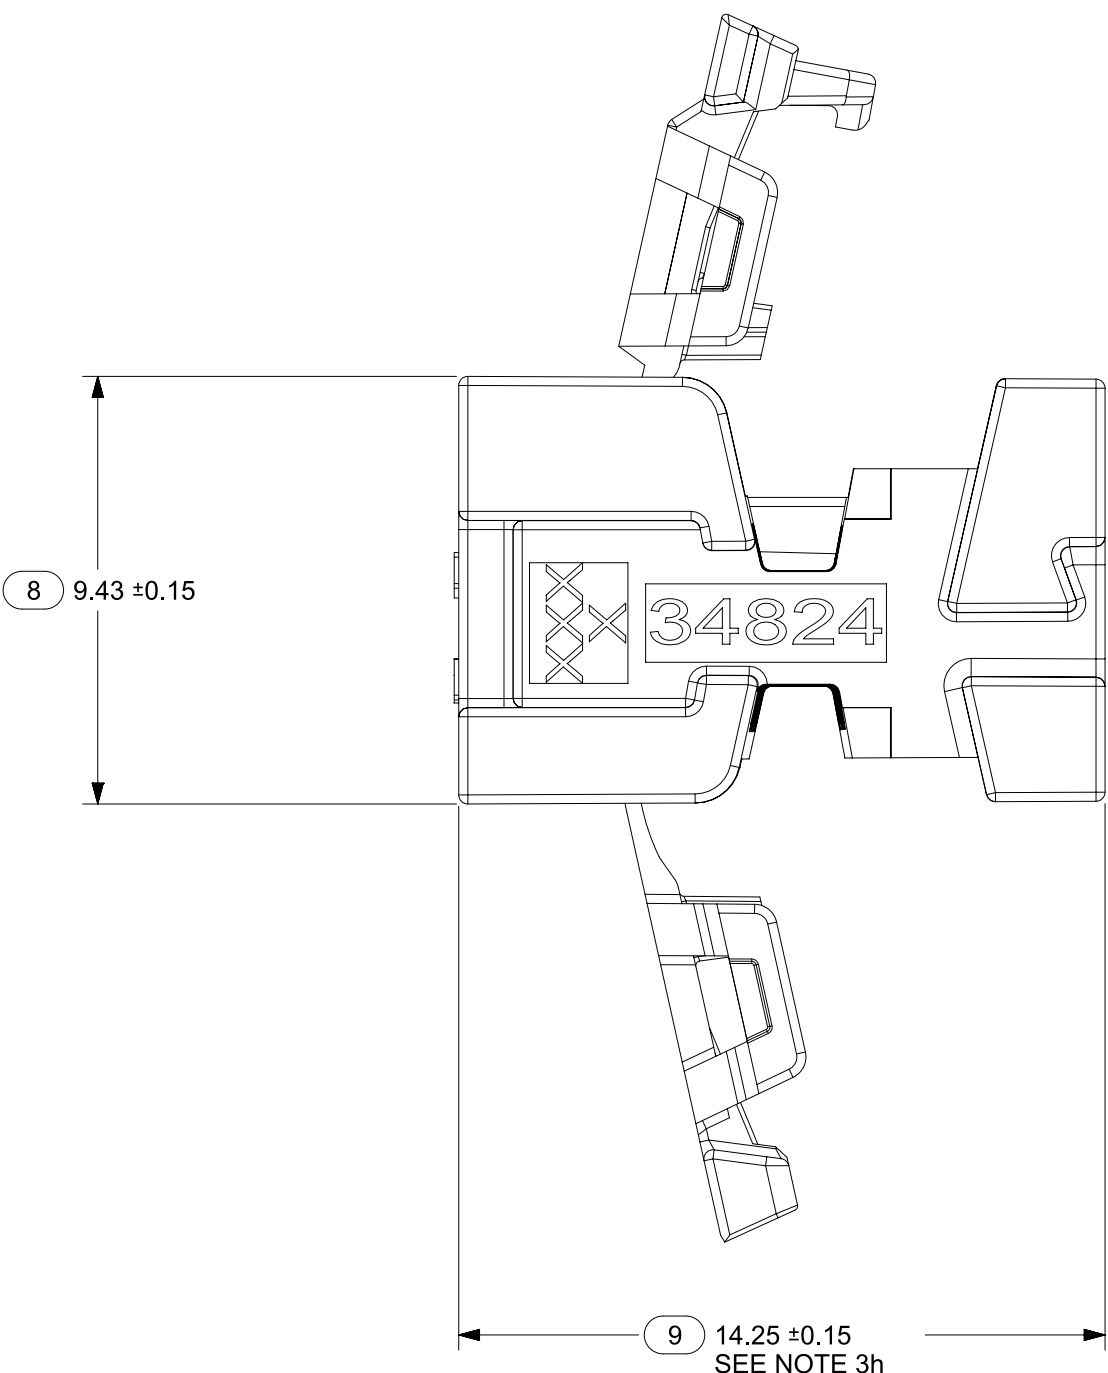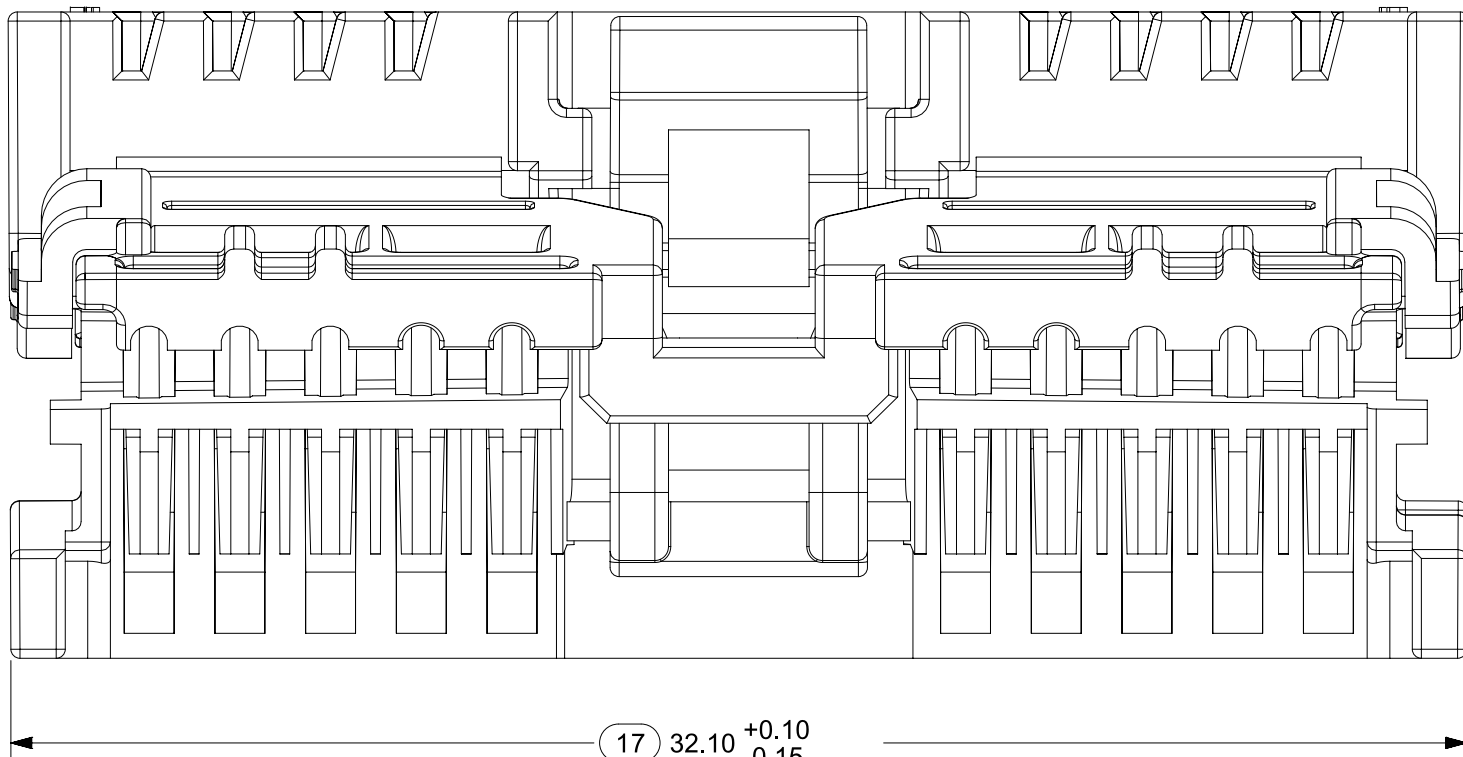

PASS THRU DIM TABLE


CIRCUIT SIZE	DIM A
12	24.18
16	27.88
20	31.64
24	35.48

FUNCTIONAL SYMBOLS
--

DIVISIONAL SYMBOLS

MINI50 RECEPTACLES - PBT

MATERIAL NUMBER BULK PACKAGING PK-31301-538	LOCK BRIDGE	CIRCUIT	POL	COLOR	MATERIAL	MATING COMPONENT					
						SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER		RIGHT ANGLE THRU HOLE HEADER	
						TAPE AND REEL PACKAGING PK-31301-786	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688
34824-0124	NO	12	A	BLACK	PBT	34897-8120	34897-9120	34825-0124	34825-9124	34826-0124	34826-9124
34824-0125	NO	12	B	GRAY		34897-8121	34897-9121	34825-0125	34825-9125	34826-0125	34826-9125
34824-0126	NO	12	C	DARK GRAY		34897-8122	34897-9122	34825-0126	34825-9126	34826-0126	34826-9126
34824-1124	YES	12	A	BLACK		34897-8120	34897-9120	34825-0124	34825-9124	34826-0124	34826-9124
34824-1125	YES	12	B	GRAY		34897-8121	34897-9121	34825-0125	34825-9125	34826-0125	34826-9125
34824-1126	YES	12	C	DARK GRAY		34897-8122	34897-9122	34825-0126	34825-9126	34826-0126	34826-9126

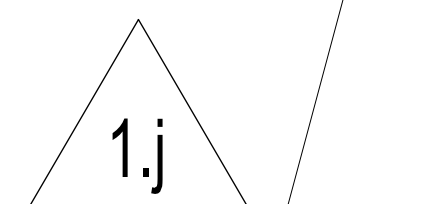

MINI50 RECEPTACLES - PA410

MATERIAL NUMBER BULK PACKAGING PK-31301-538	LOCK BRIDGE OPTION	CIRCUIT	POL	COLOR	MATERIAL	MATING COMPONENT					
						SURFACE MOUNT TECHNOLOGY (SMT) HEADER		VERTICAL THRU HOLE HEADER		RIGHT ANGLE THRU HOLE HEADER	
						TAPE AND REEL PACKAGING	TUBE PACKAGING	TRAY PACKAGING	TUBE PACKAGING	TRAY PACKAGING PK-31301-440	TUBE PACKAGING PK-31301-688
34824-0164	NO	16	A	BLACK	PA410	34897-8160	34897-9160	34825-0160	34825-9160	34826-0160	34826-9160
34824-0165	NO	16	B	GRAY		34897-8161	34897-9161	34825-0161	34825-9161	34826-0161	34826-9161
34824-0166	NO	16	C	DARK GRAY		34897-8162	34897-9162	34825-0162	34825-9162	34826-0162	34826-9162
34824-1164	YES	16	A	BLACK		34897-8160	34897-9160	34825-0160	34825-9160	34826-0160	34826-9160
34824-1165	YES	16	B	GRAY		34897-8161	34897-9161	34825-0161	34825-9161	34826-0161	34826-9161
34824-1166	YES	16	C	DARK GRAY		34897-8162	34897-9162	34825-0162	34825-9162	34826-0162	34826-9162
34824-0204	NO	20	A	BLACK		34897-8200	34897-9200	34825-0200	34825-9200	34826-0200	34826-9200
34824-0205	NO	20	B	GRAY		34897-8201	34897-9201	34825-0201	34825-9201	34826-0201	34826-9201
34824-0206	NO	20	C	DARK GRAY		34897-8202	34897-9202	34825-0202	34825-9202	34826-0202	34826-9202
34824-1204	YES	20	A	BLACK		34897-8200	34897-9200	34825-0200	34825-9200	34826-0200	34826-9200
34824-1205	YES	20	B	GRAY		34897-8201	34897-9201	34825-0201	34825-9201	34826-0201	34826-9201
34824-1206	YES	20	C	DARK GRAY		34897-8202	34897-9202	34825-0202	34825-9202	34826-0202	34826-9202
34824-0244	NO	24	A	BLACK		34897-8240	34897-9240	34825-0240	34825-9240	34826-0240	34826-9240
34824-0245	NO	24	B	GRAY		34897-8241	34897-9241	34825-0241	34825-9241	34826-0241	34826-9241
34824-0246	NO	24	C	DARK GRAY		34897-8242	34897-9242	34825-0242	34825-9242	34826-0242	34826-9242
34824-1244	YES	24	A	BLACK		34897-8240	34897-9240	34825-0240	34825-9240	34826-0240	34826-9240
34824-1245	YES	24	B	GRAY		34897-8241	34897-9241	34825-0241	34825-9241	34826-0241	34826-9241
34824-1246	YES	24	C	DARK GRAY		34897-8242	34897-9242	34825-0242	34825-9242	34826-0242	34826-9242

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
F A = 0 F C = 0 F P = 0 DIVISIONAL SYMBOLS		DIMENSION UNITS	SCALE	CURRENT REV DESC:			molex					
		GENERAL TOLERANCES (UNLESS SPECIFIED)										
		ANGULAR TOL ± 0.5°										
		4 PLACES	±				PRODUCT SALES DRAWING					
		3 PLACES	±									
		2 PLACES	± 0.100									
		1 PLACE	± 0.20									
0 PLACES	±	STATUS: Production			2023-10-20		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	2023-10-25		SD-34824-002		PSD	001	L9
				E-SIZE	34824	2023-10-30		MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
								GENERAL MARKET		3 OF 3		