
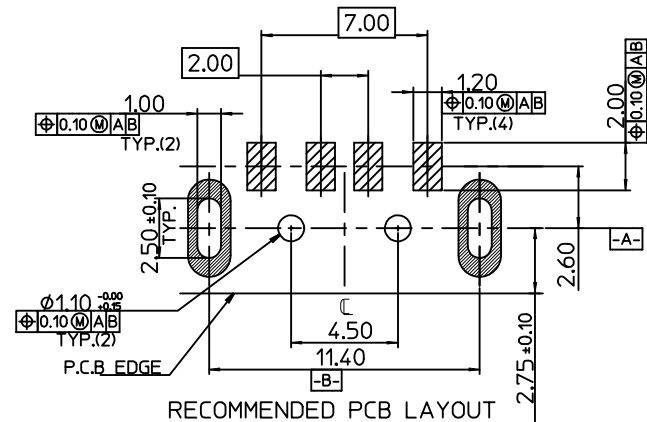
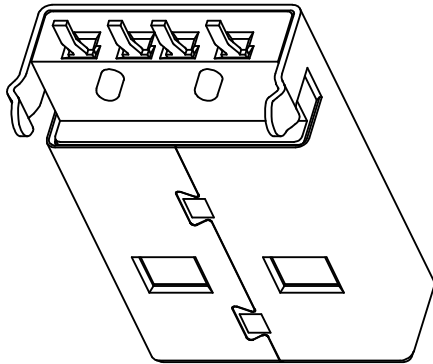


- NOTES:
- MATERIAL:
SHELL: SPCC,
HOUSING: THERMOPLASTIC GLASS FIBER FILLED.
UL94V-0, COLOR: BLACK.
CONTACT: BRASS
 - PLATING:
TERMINAL:
CONTACT AREA: GOLD(Au)
THICKNESS=30 MICROINCH MINIMUM.
SOLDER TAIL: TIN(Sn), ALLOY.
THICKNESS=120 MICROINCH MINIMUM.
UNDER PLATED: NICKEL(Ni), THICKNESS=50 MICROINCH MINIMUM.
METAL SHELL:
NICKEL(Ni). THICKNESS=120 MICROINCH MINIMUM.
UNDER PLATE: COPPER(Cu), THICKNESS=50 MICROINCH MINIMUM.
 - RECOMMENDED PCB THICKNESS: 1.20~1.60mm
 - PRODUCT SPECIFICATION: REFERS TO PS-48037-001
 - PACKAGE SPECIFICATION: SEE TABLE
 - TEST SUMMARY: REFERS TO TS-48037-001

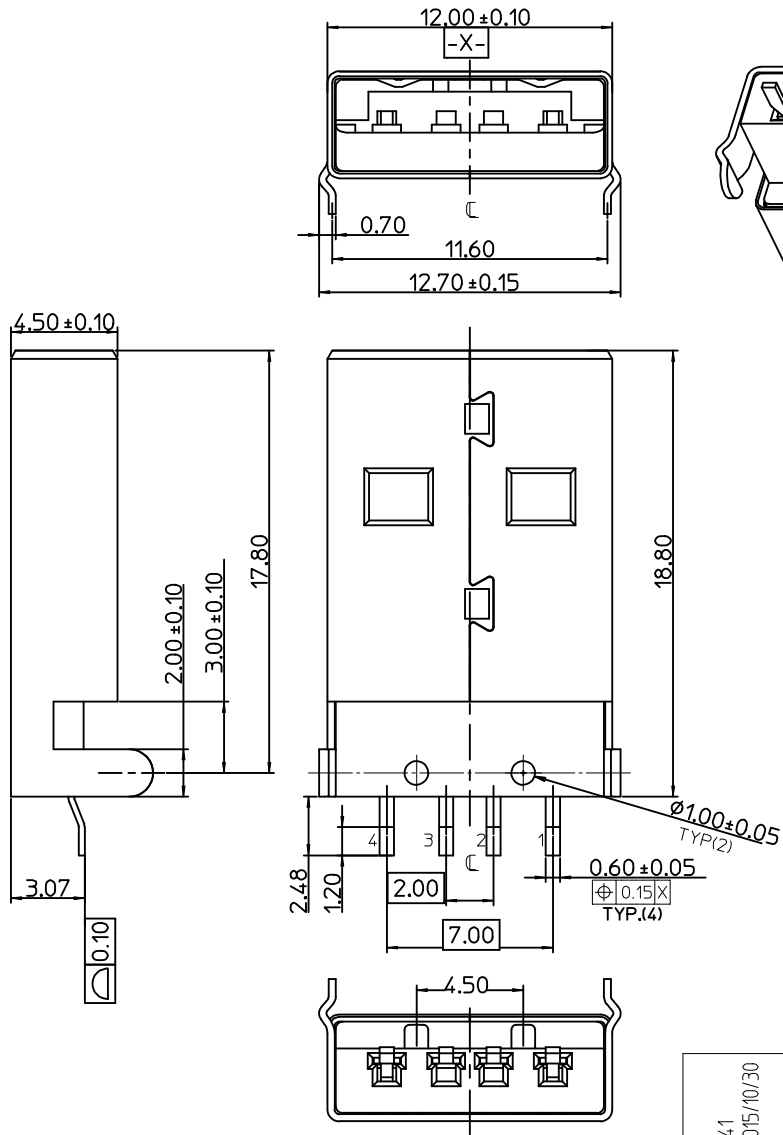

48037-2000	T&R	PK-48037-200
48037-1000	TRAY	PK-48037-001
MOLEX P/N	PACKAGE	PACKAGE SPEC

REVISE EC NO: SH2016-0141 DRWN: FYANG05 2015/10/30 CHKD: APPR: RZHANG 2015/11/05	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm INCH	MM ONLY	1:1	⊙ □		
		4 PLACES ± --- ± ---		DRAWN BY DATE	TITLE	USB A TYPE PLUG R/A CONNECTOR(SMT)		
		3 PLACES ± --- ± ---		COLIN DUANG 2003/08/22				
		2 PLACES ± 0.25 ± ---		CHECKED BY DATE		molex MOLEX INCORPORATED		
1 PLACE ± 0.25 ± ---		APPROVED BY DATE						
ANGULAR ± 3 °		WILSON CHANG 2003/08/22		DOCUMENT NO.	SD-48037-002	SHEET NO.	1 OF 1	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				