




产品编号 : [5023800900](#)

Product Description : CLIK-Mate Plug Housing, 1.25mm Pitch, Single Row, Positive Lock, 9 Circuits, White

系列号 : 502380

状态 : Active

Product Category : Connector Housings

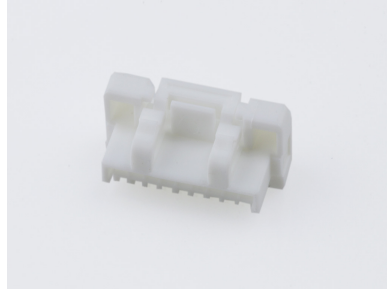

---

## 文件和资源

### 图纸

[图纸 5023800900\\_sd.pdf](#)

[包装设计图 SPK-502380-001-001.pdf](#)

[包装设计图 SPK-502380-001-002.pdf](#)

### 3D 模型和设计文件

[3D模型 5023800900\\_stp.zip](#)

### 规格

[应用规格 AS-502380-001-001.pdf](#)

[应用规格 AS-502380-002-001.pdf](#)

[产品规格 PS-502382-001-001.pdf](#)

[产品规格 PS-502382-002-001.pdf](#)

---

## 产物环境合规

### 合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

### 多部分产品合规性声明

- Eu RoHS

- REACH SVHC

- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

---

**产品详情**

**常规**

状态	活动
类别	Connector Housings
系列	502380
说明	CLIK-Mate Plug Housing, 1.25mm Pitch, Single Row, Positive Lock, 9 Circuits, White
应用	Signal, Wire-to-Board
产品系列	CLIK-Mate Wire-to-Board Connectors
产品名称	CLIK-Mate
UPC	822350895118

**电气**

每触点最大电流	1.0A
---------	------

**物理**

断开	否
电路数 (最多)	9
颜色-树脂	白色
性别	Plug
符合灼热丝规范	否
插接极性	是
锁定插接部位	是
材料 - 树脂	Polyester
净重	237.000/mg
行数	1
包装形式	Bag

面板安装式	否
间距 - 插配接口	1.25mm
有极性的插配件	是
可堆叠的	否
运行温度范围	-40° to +105° C

---

### 可连接使用部件

描述	产品编号
Pre-Crimped Lead CLIK-Mate 1.25mm Male-to-CLIK-Mate 1.25mm Male, Tin (Sn) Plating, 150.00mm Length, 28 AWG, Black	<a href="/content/molex/molex-dot-com/cn/zh/products/product-page.html/797581012.html">/content/molex/molex-dot-com/cn/zh/products/product-page.html/797581012.html</a>
Pre-Crimped Lead CLIK-Mate 1.25mm Male-to-CLIK-Mate 1.25mm Male, Tin (Sn) Plating, 300.00mm Length, 28 AWG, Black	<a href="/content/molex/molex-dot-com/cn/zh/products/product-page.html/797581013.html">/content/molex/molex-dot-com/cn/zh/products/product-page.html/797581013.html</a>