


△ターミナル
TERMINAL




ターミナル装着状態図
TERMINAL ASSEMBLY DRAWING

注記 NOTES


- △ 適合ターミナル: 50217-****
APPLICABLE TERMINAL : 50217-****
- 2. 嵌合相手: 53258,53265,53259,53266 シリーズ
MATE WITH : 53258,53265,53259,53266 SERIES




2極に適用
APPLY FOR 2 CKTS.



3極に適用
APPLY FOR 3 CKTS.




4極以上の偶数極に適用
APPLY FOR EVEN OF 4 CKTS. OVER

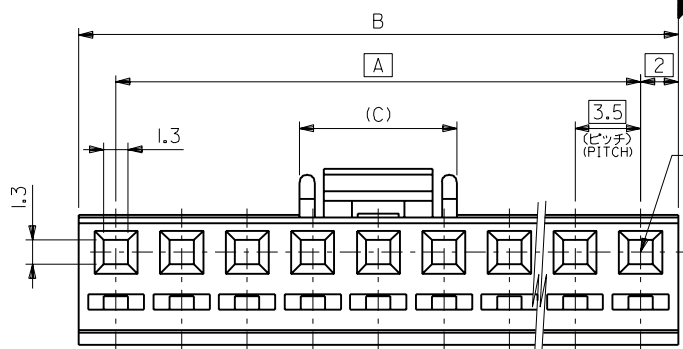

⊕ 0.4 A B


△ B

(0.65)

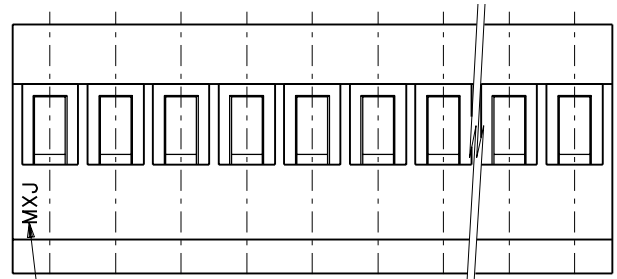

トレードマーク
TRADE MARK

回路番号
CIRCUIT NO.

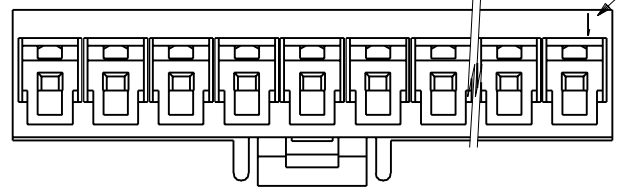

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

8.4	53.0	49.0	51067-1500	15	
	49.5	45.5	-1400	14	
	46.0	42.0	-1300	13	
	42.5	38.5	-1200	12	
	39.0	35.0	-1100	11	
	35.5	31.5	-1000	10	
	32.0	28.0	-0900	9	
	28.5	24.5	-0800	8	
	25.0	21.0	-0700	7	
	21.5	17.5	-0600	6	
	18.0	14.0	-0500	5	
	8.4	14.5	10.5	-0400	4
	5.8	11.0	7.0	-0300	3
	5.8	7.5	3.5	51067-0200	2
(C)	B	A	ENG. NO.	CKT. 極数	

角度 ANGLE	公差 TOLERANCES	記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
±3°	C	変更 (J40647)	M.S		'94/8/18
30以上 OVER	+0.3	B	変更 (J30484)	M.F.H.H	'93/5/18
10以上 30未満 UNDER	+0.25	A	変更 (J00226)	M.F.H.H	'90-2-28
10未満 UNDER	+0.2	O	新規作成 PROPOSED (J91079)	M.F.H.H	'89-12-19

材料 MATERIAL	PBT,UL94V-0
仕上げ FINISH	—#
適用電線範囲 WIRE RANGE	—#
被覆外径 INS. RANGE	—#
DRAWN BY '89-12-19	CHK'D BY '94/8/18
K.KASAKAWA	H.HIRAMOTO
APP'D BY '94/8/18	M.FUKUSHIMA
尺度 SCALE	—#

molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
REVISE ONLY ON CAD SYSTEM	
TITLE 名称 3.5 WIRE TO BOARD CONN. RECEPTACLE HOUSING	
DWG. NO.	REV
SD-51067-**-00	C



产品编号 : [510670200](#)

Product Description : Mighty-SPOX Wire-to-Wire and Wire-to-Board Housing, 3.50mm Pitch, Positive Lock, 2 Circuits, Natural

系列号 : [51067](#)

状态 : Active

Product Category : Connector Housings



文件和资源

图纸

[图纸 510670200_sd.pdf](#)

[包装设计图 SPK-51067-001-001.pdf](#)

[包装设计图 SPK-51067-001-002.pdf](#)

3D 模型和设计文件

[3D模型 510670200_stp.zip](#)

规格

[产品规格 PS-51067-002-001.pdf](#)

[产品规格 PS-51067-003-001.pdf](#)

[产品规格 PS-51067-004-001.pdf](#)

[产品规格 PS-51067-005-001.pdf](#)

[产品规格 PS-51067-006-001.pdf](#)

[产品规格 PS-51067-007-001.pdf](#)

[产品规格 PS-51067-008-001.pdf](#)

[产品规格 PS-51067-016-001.pdf](#)

[产品规格 PS-51067-017-001.pdf](#)

[产品规格 PS-51067-018-001.pdf](#)

[产品规格 PS-51067-019-001.pdf](#)

[产品规格 PS-51067-020-001.pdf](#)

[产品规格 PS-51067-021-001.pdf](#)

[产品规格 PS-51067-022-001.pdf](#)

[产品规格 PS-51067-023-001.pdf](#)

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant

Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	51067
说明	Mighty-SPOX Wire-to-Wire and Wire-to-Board Housing, 3.50mm Pitch, Positive Lock, 2 Circuits, Natural
应用	Power, Wire-to-Board, Wire-to-Wire
产品系列	Mighty-SPOX Connector System
产品名称	Mighty-SPOX
UPC	800753574359

机构

CSA	LR19980
UL	E29179

物理

电路数（最多）	2
---------	---

颜色-树脂	Natural
阻燃性	94V-0
性别	Receptacle
符合灼热丝规范	否
材料 - 树脂	Polyester
净重	506.100/mg
行数	1
包装形式	Bag
面板安装式	否
间距 - 插配接口	3.50mm
可堆叠的	否
运行温度范围	-40° to +105° C

可配插/可连接使用的产品

可配插部件

描述	产品编号
Mighty-SPOX Plug Housings	<u>51114</u>
3.50mm Pitch Mighty-SPOX Vertical Headers	<u>53258</u>
3.50mm Pitch Mighty-SPOX Right-Angle Headers	<u>53259</u>
7.00mm Pitch Mighty-SPOX Vertical Headers	<u>53265</u>
7.00mm Pitch Mighty-SPOX Right-Angle Headers	<u>53266</u>

可连接使用部件

描述	产品编号
Mighty-SPOX Female Crimp Terminals	<u>50217</u>