




产品编号 : [511910600](#)

Product Description : 2.50mm Pitch Mini-Latch Wire-to-Wire and Wire-to-Board Receptacle Housing, with Guide Rails, 6 Circuits

系列号 : 51191

状态 : New Business Not Supported

Product Category : Connector Housings

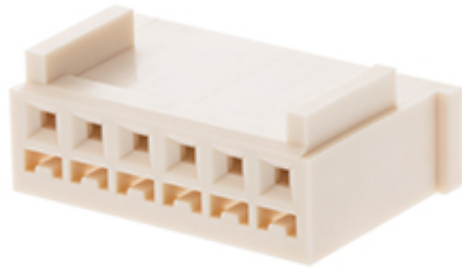

文件和资源

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	New Business Not Supported
类别	Connector Housings
系列	51191
说明	2.50mm Pitch Mini-Latch Wire-to-Wire and Wire-to-Board Receptacle Housing, with Guide Rails, 6 Circuits
应用	Signal, Wire-to-Board, Wire-to-Wire
产品系列	Mini-Latch Wire-to-Board / Wire-to-Wire Connector System
产品名称	Mini-Latch
UPC	800753327788

机构

UL	E29179
----	--------

物理

电路数（最多）	6
阻燃性	94V-0
性别	Receptacle
符合灼热丝规范	否
材料 - 树脂	Nylon
净重	619.100/mg
行数	1
包装形式	Bag
面板安装式	否
间距 - 插配接口	2.50mm
可堆叠的	否
运行温度范围	-40° to +105° C