




产品编号 : [511910700](#)

Product Description : 2.50mm Pitch Mini-Latch Wire-to-Wire and Wire-to-Board Receptacle Housing, with Guide Rails, 7 Circuits

系列号 : 51191

状态 : New Business Not Supported

Product Category : Connector Housings

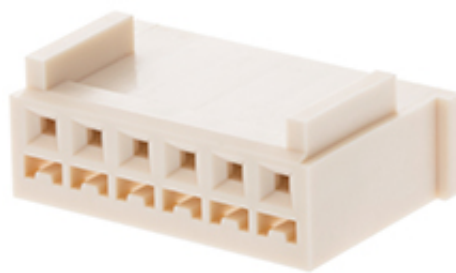

文件和资源

产物环境合规

合规

| | |
|--------------------|--|
| GADSL/IMDS | Not Relevant |
| China RoHS | |
| EU ELV | Not Relevant |
| Low-Halogen Status | Low-Halogen per IEC 61249-2-21 |
| REACH SVHC | Not Contained per D(2023)3788-DC (14 Jun 2023) |
| EU RoHS | Compliant per EU 2015/863 |

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

| | |
|------|---|
| 状态 | New Business Not Supported |
| 类别 | Connector Housings |
| 系列 | 51191 |
| 说明 | 2.50mm Pitch Mini-Latch Wire-to-Wire and Wire-to-Board Receptacle Housing, with Guide Rails, 7 Circuits |
| 应用 | Signal, Wire-to-Board, Wire-to-Wire |
| 产品系列 | Mini-Latch Wire-to-Board / Wire-to-Wire Connector System |
| 产品名称 | Mini-Latch |
| UPC | 800753327818 |

机构

| | |
|----|--------|
| UL | E29179 |
|----|--------|

物理

| | |
|-----------|-----------------|
| 电路数（最多） | 7 |
| 阻燃性 | 94V-0 |
| 性别 | Receptacle |
| 符合灼热丝规范 | 否 |
| 材料 - 树脂 | Nylon |
| 净重 | 704.700/mg |
| 行数 | 1 |
| 包装形式 | Bag |
| 面板安装式 | 否 |
| 间距 - 插配接口 | 2.50mm |
| 可堆叠的 | 否 |
| 运行温度范围 | -40° to +105° C |