



产品编号 : 987861019


Product Description : 2.54mm Pitch MOX
Receptacle Housing, 6 Circuits, Dual Row,
Brown

系列号 : 98786

状态 : Active

Product Category : Connector Housings

工程编号 : 499212211

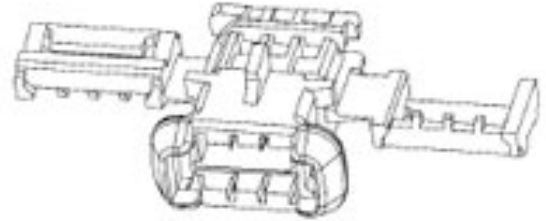

文件和资源

图纸

图纸 987861019_sd.pdf

规格

应用规格 AS-98787-001-001.pdf

包装规格 PK-98786-001-001.pdf

产物环境合规

合规

GADSL/IMDS	Compliant
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Not Relevant
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

多部分产品合规性声明

- Eu RoHS
- REACH SVHC
- Low-Halogen

多部分行业合规性文件

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Connector Housings
系列	98786
说明	2.54mm Pitch MOX Receptacle Housing, 6 Circuits, Dual Row, Brown
应用	Power, Wire-to-Board, Wire-to-Wire
个评论	2x3 Circuits, Contact Retention Force without secondary locking: 40N, with secondary locking: 60N
产品系列	MOX Products
产品名称	MOX
UPC	822348761326

电气

每触点最大电流	7.5A
---------	------

物理

电路数（最多）	6
颜色-树脂	棕色
性别	Receptacle
符合灼热丝规范	否
插接极性	无
锁定插接部位	是
材料 - 树脂	Nylon
净重	1.060/g
行数	2
包装形式	Bag
面板安装式	否

间距 - 插配接口	2.54mm
间距 - 终端界面	2.54mm
有极性的插配件	是
可堆叠的	否
运行温度范围	-40° to +100° C

进程

无铅	不适用
----	-----

可配插/可连接使用的产品

可配插部件

描述	产品编号
2.54mm Pitch Dual Row Male Headers	<u>98780</u>

可连接使用部件

描述	产品编号
MOX Female Crimp Terminals	<u>98658</u>

施工工具


全局

描述	产品编号
Extractor Tool for MOX 0.635mm Receptacle Crimp Terminals	<u>0638138500</u>






CODINGS

P/N°: 0987861011	P/N°: 0987861019	P/N°: 0987861018	P/N°: 0987861016
COLOR BLACK	COLOR BROWN	COLOR GREY	COLOR BLUE

MINIMUM FREE SPACE FOR ASSEMBLY

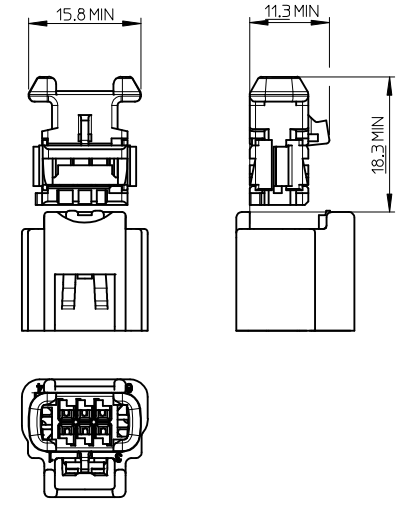


NECESSARY VOLUME FOR THE HOUSING ASSEMBLY.
ALLOW AN ADDITIONAL VOLUME FOR THE UNMATING

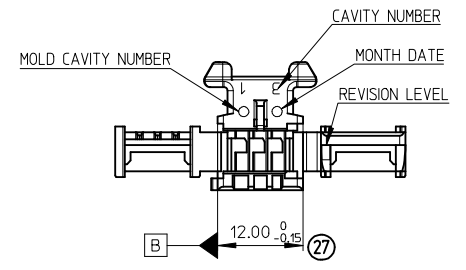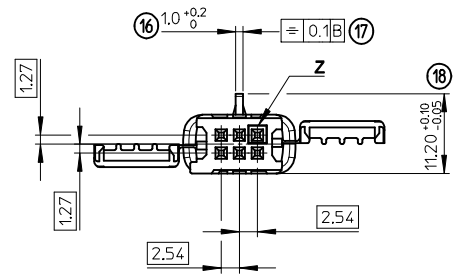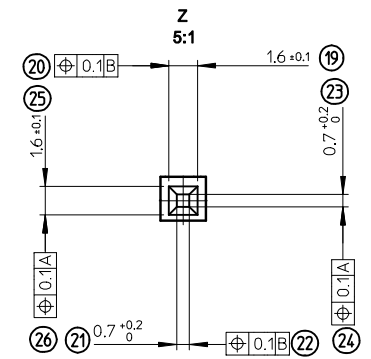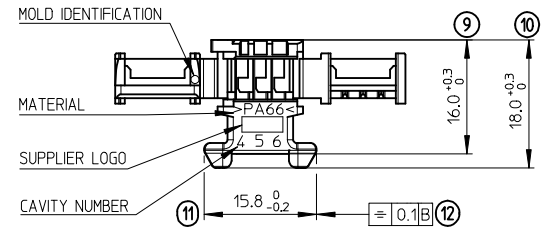

NOTES:

- 1- MATERIAL : POLYAMIDE (PA66) UNFILLED UL94V-2
- 2- USE WITH : 98658 (MOX 0.63 TERMINAL)
- 3- APPLICATION SPECIFICATION : AS-98787-001
- 4- MATE WITH : SERIES 98780 (HEADER)
- 5- WEIGHT : 1,060 g

ISO VIEW




REVISIONS EC NO: G2013-0071 DRW: RDDSSANTOS 2011/02/22 CHK: AHERBELIN 2012/09/17 APPR: OPLESSIS 2012/11/23	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION
	4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.05 ± --- 1 PLACE ± 0.1 ± --- 0 PLACE ± --- ± ---	mm INCH	DRAWN BY VGUERIN	DATE 2008/03/07	TITLE MOX RCPT HSG 0.635 CEM 6CKT		
		MATERIAL NO.		DOCUMENT NO.		SHEET NO. 1 OF 1	
ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-98786-001			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							






CODINGS

P/N°: 0987861011	P/N°: 0987861019	P/N°: 0987861018	P/N°: 0987861016
COLOR BLACK	COLOR BROWN	COLOR GREY	COLOR BLUE

MINIMUM FREE SPACE FOR ASSEMBLY

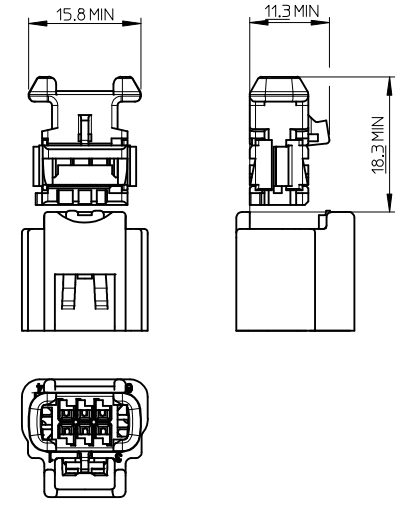


NECESSARY VOLUME FOR THE HOUSING ASSEMBLY.
ALLOW AN ADDITIONAL VOLUME FOR THE UNMATING

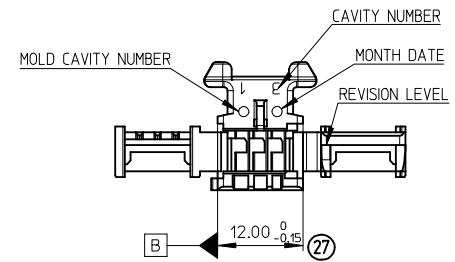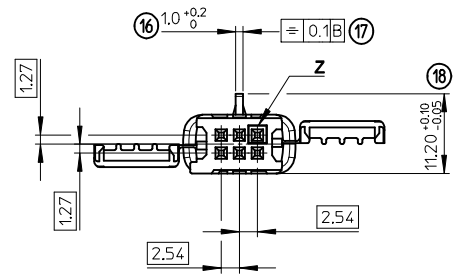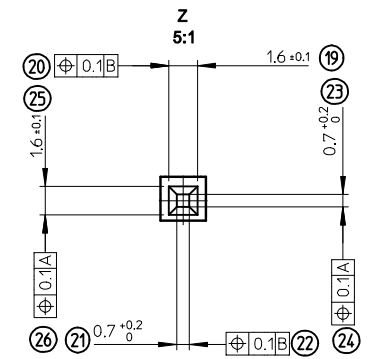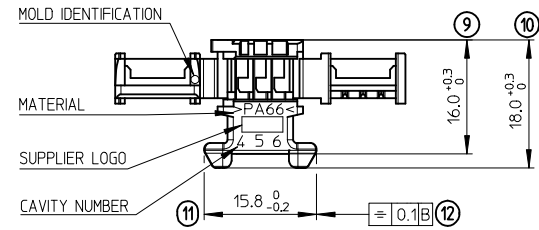

NOTES:

- 1- MATERIAL : POLYAMIDE (PA66) UNFILLED UL94V-2
- 2- USE WITH : 98658 (MOX 0.63 TERMINAL)
- 3- APPLICATION SPECIFICATION : AS-98787-001
- 4- MATE WITH : SERIES 98780 (HEADER)
- 5- WEIGHT : 1,060 g

ISO VIEW



REVISÉ EC NO: G2013-0071 DRWN:DDSSANTOS 2011/02/22 CHKD:HERBELIN 2012/09/17 APPR:PLESSIS 2012/11/23	DESCRIPTION [REDACTED]	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION		
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± 0.05 ± ---	1 PLACE ± 0.1 ± ---	0 PLACE ± --- ± ---	DRAWN BY VGUERIN	DATE 2008/03/07	TITLE MOX RCPT HSG 0.635 CEM 6CKT	
		ANGULAR ± 2 °					CHECKED BY JLDUCLOS	DATE 2008/03/07	APPROVED BY LSTICKEIR	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					MATERIAL NO. SEE CHART	DATE 2008/03/07	DOCUMENT NO. SD-98786-001	SHEET NO. 1 OF 1