


# SPECIFICATION FOR APPROVAL



TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL	10DBAW5	
ORDER P/N.	10DBAW5		SAMPLE ISSUE DATE		


## 1. PHYSICAL DIMENSIONS:

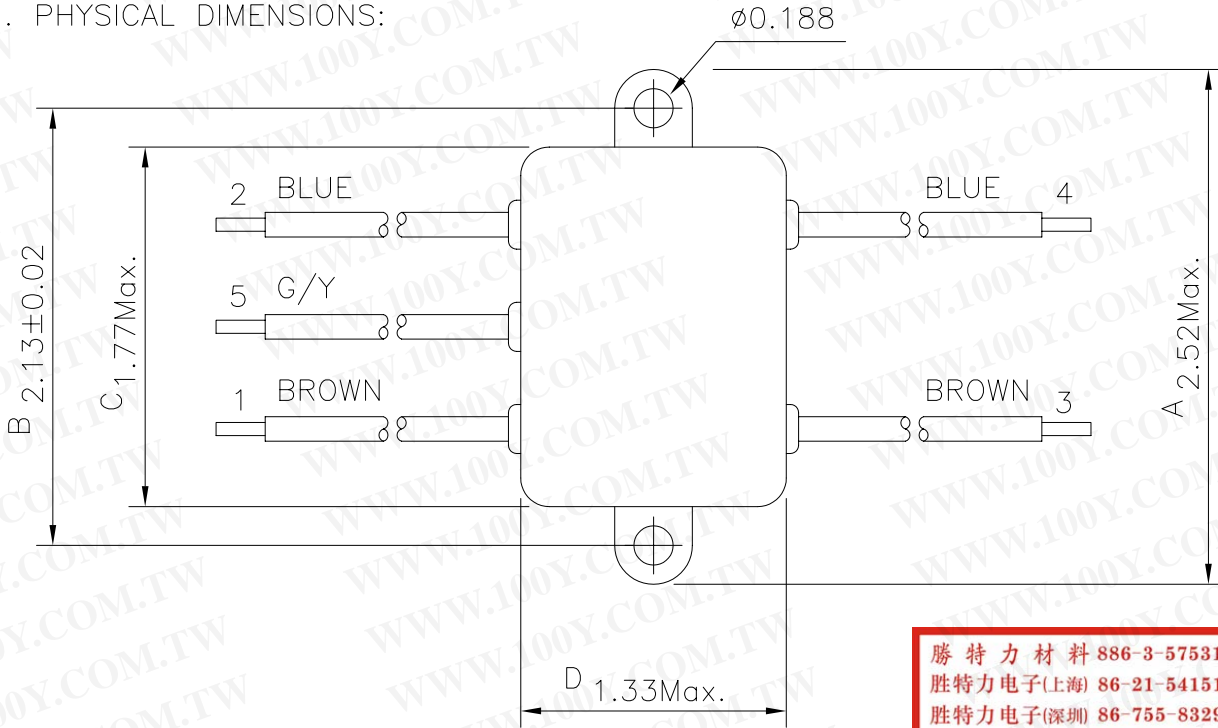

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT: INCH

## 2. SCHEMATIC:

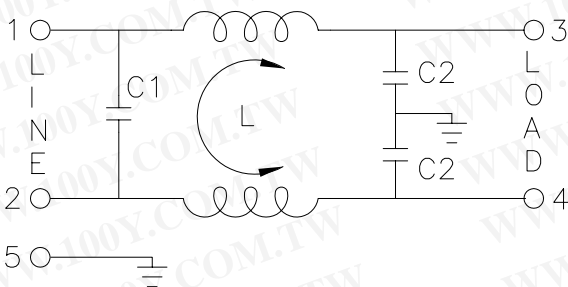

L: 1.5mH  
 C1: 0.1uF  
 C2: 3300pF

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .XX± .XX± ANGLES±		
			REV.	99.08.30	

# SPECIFICATION FOR APPROVAL



TO: \_\_\_\_\_

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	10DBAW5
ORDER P/N.	10DBAW5			SAMPLE ISSUE DATE	

### 3. ELECTRICAL CHARACTERISTICS:

3-1. VOLTAGE RATING ..... 115/250VAC

#### 3-2. CURRENT RATING

A. AT 115VAC ..... 10 A RMS Max.

B. AT 250VAC ..... 10 A RMS Max.

3-3. OPERATING FREQUENCY..... 50/60 Hz

#### 3-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @115VAC 60Hz ..... 0.25 mA Max.

B. @250VAC 50Hz ..... 0.45 mA Max.

#### 3-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND ..... 2250VDC

B. LINE TO LINE ..... 1450VDC

3-6. TEMPERATURE RANGE: -25 TO +100 DEGREE C

3-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	20	30	35	50	50	45
DIF. MODE dB	/	/	/	6	15	20	44	45	45

3-8. SAFETY



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

REPORT BY	CHECKED BY	APPROVED BY	3	
			2	
			REV.1	00.06.26