


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 20, 2001



1. MATERIALS AND FINISH
 1.1 HOUSING MATERIALS:
 THERMOPLASTICS (UL 94V-0). BLACK.
 1.2 CONTACTS:
 COPPER ALLOY.
 UNDER PLATING NICKEL.
 CONTACT AREA PLATING G/F.
 2. SPECIFICATIONS
 2.1 CURRENT RATING:
 1A MAX.
 2.2 INSULATION RESISTANCE:
 500MΩ MIN.
 2.3 DIELECTRIC WITHSTANDING VOLTAGE:
 500V (r.m.s) AC FOR 1 MINUTE.
 2.4 CONTACT RESISTANCE:
 30mΩ MAX.
 2.5 OPERATING TEMPERATURE:
 -40°C ~ +85°C.

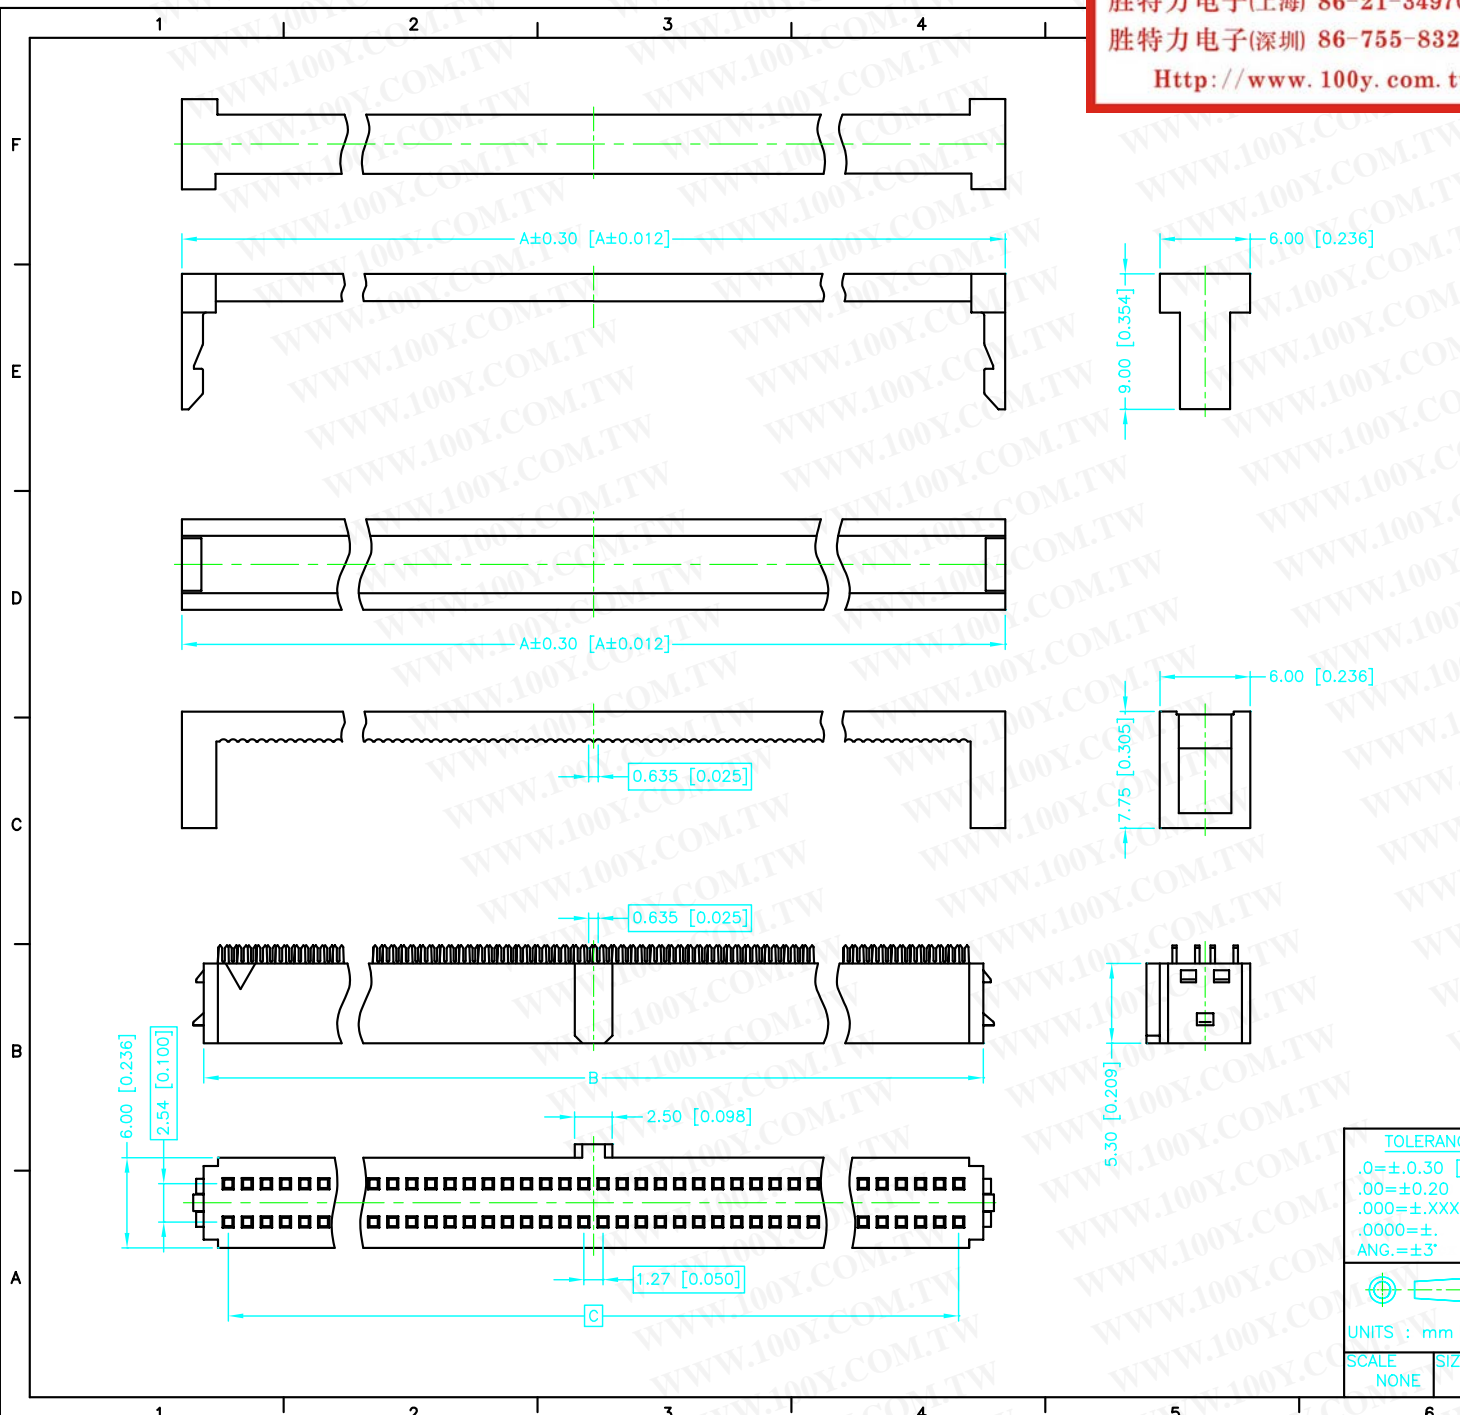

100	68.50 [2.697]	65.60 [2.583]	62.23 [2.450]
80	55.80 [2.197]	52.90 [2.083]	49.53 [1.950]
68	48.18 [1.897]	45.28 [1.783]	41.91 [1.650]
60	43.10 [1.697]	40.20 [1.583]	36.83 [1.450]
50	36.75 [1.457]	33.85 [1.333]	30.48 [1.200]
40	30.40 [1.197]	27.50 [1.083]	24.13 [0.950]
34	26.59 [1.047]	23.69 [0.933]	20.32 [0.800]
30	24.05 [0.947]	21.15 [0.833]	17.78 [0.700]
26	21.51 [0.847]	18.61 [0.733]	15.24 [0.600]
20	17.70 [0.697]	14.80 [0.583]	11.43 [0.450]
16	15.16 [0.597]	12.26 [0.483]	8.89 [0.350]
10	11.35 [0.447]	8.45 [0.333]	5.08 [0.200]
Number of Position	A	B	C
	DIMENSIONS		

TOLERANCE		DRAWER	
.0=±0.30 [.012]		Afun	
.00=±0.20 [.008]		CHECK	
.000=±.XXX		APP'D	
.0000=±.		NAME	
ANG.=±3°		IDC SOCKET	
		PRODUCT SPEC.	
UNITS : mm [inch]		1. 27X2.54mm KIT (三件式)	
SCALE NONE		DRAW NO.	
SIZE A4		SHEET 1 OF 1	
REV. A			