

Closed-End Wire Connectors

Closed-End Standard Type

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



- Polyamide 66, UL 94V-2 flame-retardant shell.
- Two types of sleeve to choose from aluminum or tin-plated copper.
- Rated to 600V max. for building wiring and 1000V max. lighting fixtures and signs.
- Insert stripped conductors into connector and crimp once with crimp tool.

Model No.	Color	Electrical Ratings	Wire Range
CE1	Nature	300 V Max. 105°C (221°F)	22-18 AWG, Cu Max. 2 #20 w/1 #18 Min. 2 #22
CE1X	Nature	300 V Max. 105°C (221°F)	22-18 AWG, Cu Max. 2 #20 w/1 #18 Min. 2 #22
CE2	Nature	300 V Max. 105°C (221°F)	22-14 AWG, Cu Max. 1 #18 w/1 #14 Min. 2 #22
CE2X	Nature	300 V Max. 105°C (221°F)	22-14 AWG, Cu Max. 1 #18 w/1 #14 Min. 2 #22
CE5	Nature	300 V Max. 105°C (221°F)	22-10 AWG, Cu Max. 3 #14 Min. 2 #22 w/2 #18
CE5X	Nature	300 V Max. 105°C (221°F)	20-14 AWG, Cu Max. 3 #14 Min. 2 #18

		300 V Max. for UL	16-10 AWG, Cu
CE8	Nature	600 V Max. for CSA & CQC Max. 2 #16 w/1 #10	
		105°C (221°F)	Min. 2 #16 w/1 #12


材質：高級尼龍 66 工程原料,防火等級 94V2 級，絕緣佳，不易老化。

電壓：300V 溫度：150°C

特點：增加電線壓接範圍使其更易於導電，
並更能夾住電線，即使強烈振動也不脫落。

使用方法：將電線尾部外皮剝去再插入套管內，用壓線鉗壓緊即可。

用途：廣泛用於各種電器產品,如電風扇、排風、燈飾、風機、電機等家庭配線
接線器材。

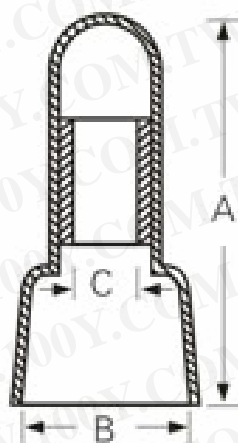

型號 Item No.	高 A	寬 B	金屬內徑 C	適用電線範圍		包裝 Packing
				平方綫	A.W.G	
CE-1X	18.0	6.2	2.6	1.25	#22-16	1000PCS
CE-2X	19.7	7.9	3.0	2.0	#16-14	
CE-5X	25.5	10.5	4.0	5.5	#12-10	
CE-8	27.7	12.4	5.3	8.0	#8	500PCS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)