







CPM-2

SPECIFICATION

Unit : mm

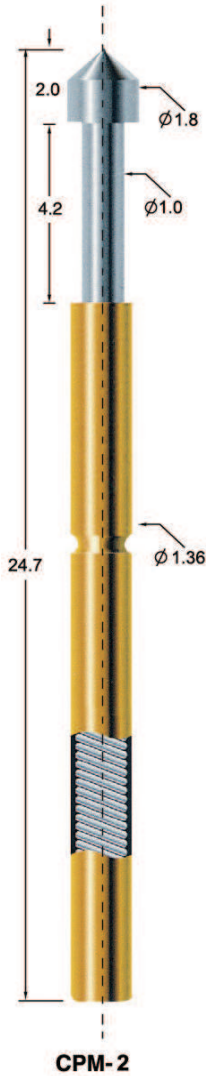


CPM-2

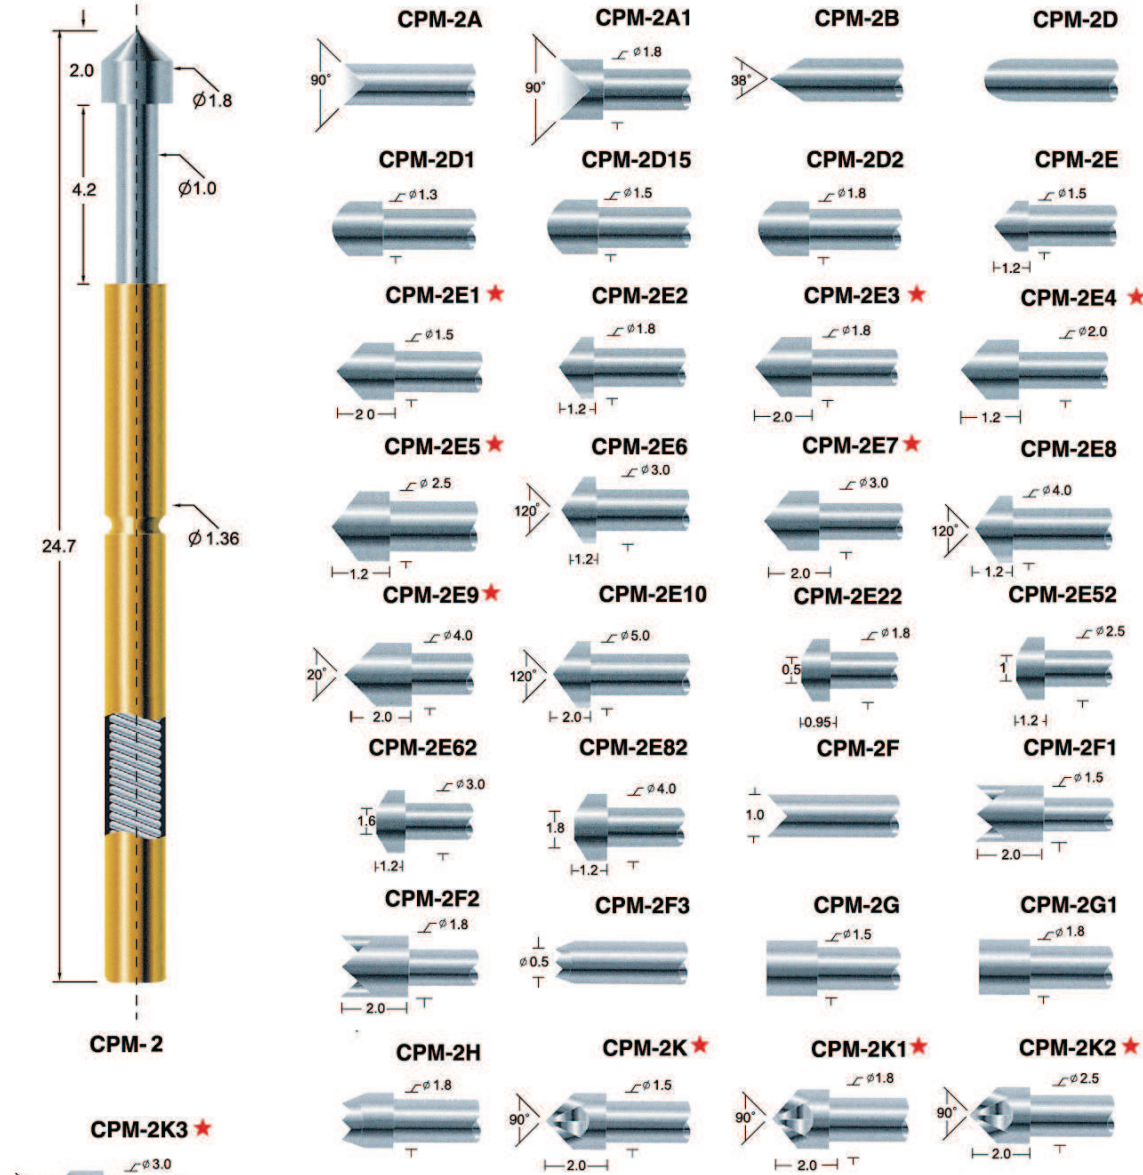

Mounting hole size 孔徑
 $\phi 1.7 / .0669''$

Mounting hole size 孔徑
 $\phi 1.75 / .0689''$
















Probe specifications CPM-2

Recommended min. center	最小間距	2.54 (0.1")
Full travel	行程	4.2(0.165") / 2.54(0.1")
Current rating	額定電流	3A
Contact resistance	接觸電阻	30mΩ
Spring force	全壓彈力	150g

★ 為訂製品代號

Materials and finishes

Plunger	針頭	Sk4 / PhBr / NI plated
Barrel	針管	Brass , Gold plated
Spring	彈簧	Stainless Steel

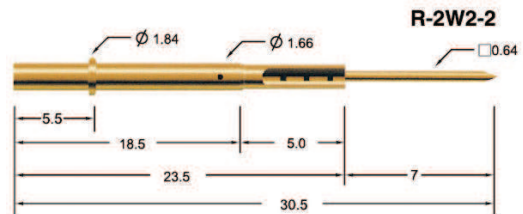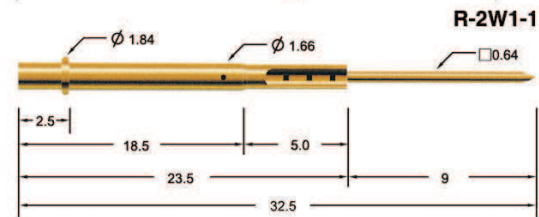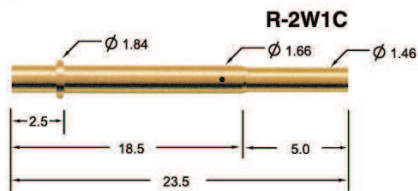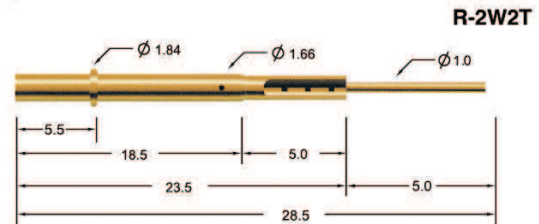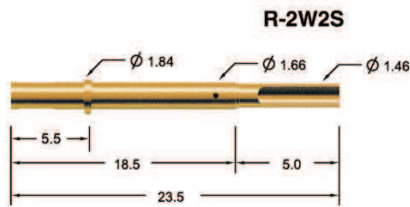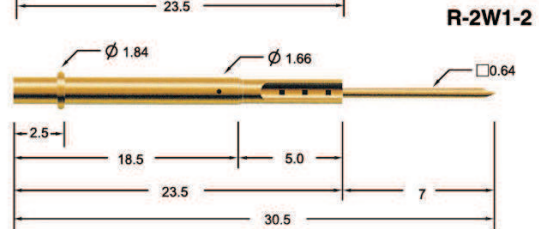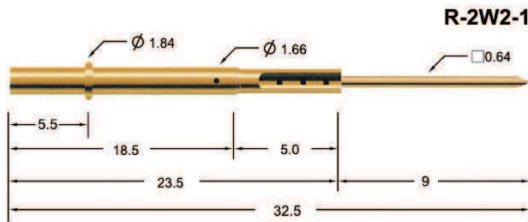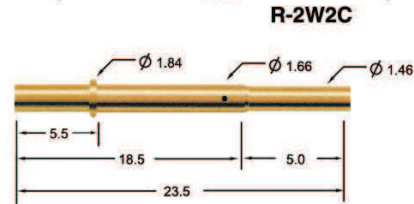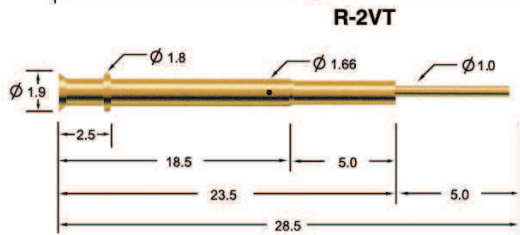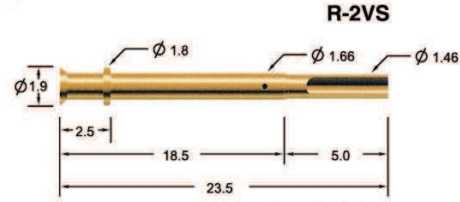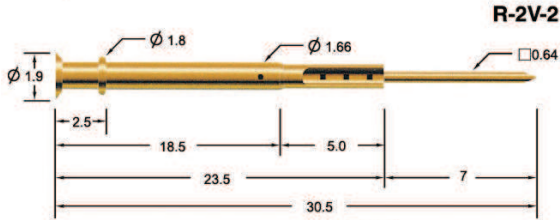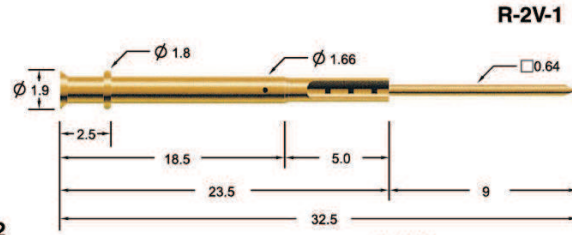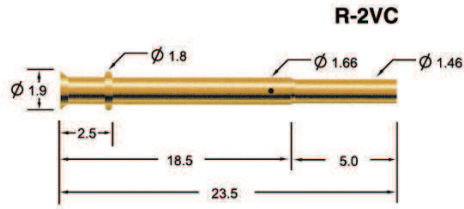

Mounting hole size 孔徑
 $\phi 1.7 / .0669''$

Mounting hole size 孔徑
 $\phi 1.75 / .0689''$

Probe specifications R-2

Recommended min. center 最小間距 2.54 (.01")

Materials and finishes

Barrel 針管 Brass, Gold plated

