

圖號 DRAWING No. :FP3F-A-0

校訂版次 REVISIONS

品名 NAME:Female

ITEM No. :

版次	記述 DESCRIPTION	DATE	核可


NOTE:

1. MAXIMUM ELECTRICAL RATING:105°C 300 VOLTS
2. WIRE RANGE:22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR:RED
3. WIRE RANGE:16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR:BLUE
4. WIRE RANGE:12-10 AWG / 4-6 mm²
INSULATED COLOR:YELLOW
5. MATERIAL THICKNESS:t
TOLERANC:±0.05

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.50	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	B F1-2.8A/5	0.5x2.8	3.2	6.4	19.5	11.0	4.1	1.7	0.25
	B F1-2.8A/8	0.8x2.8	3.2	6.4	19.5				0.25
	A F1-4.8A/5	0.5x4.8	5.0	6.5	20.0				0.35
	A F1-4.8A/8	0.8x4.8	5.0	6.5	20.0				0.35
	A F1-6.4A	0.8x6.4	6.6	7.9	22.0				0.4
	A F1-8A	0.8x8.0	8.4	10.0	25.0				0.4
16-14 AWG 1.5-2.5 mm ²	B F2-2.8A/5	0.5x2.8	3.2	6.4	19.5	11.0	4.8	2.3	0.25
	B F2-2.8A/8	0.8x2.8	3.2	6.4	19.5				0.25
	A F2-4.8A/5	0.5x4.8	5.0	6.5	20.0				0.35
	A F2-4.8A/8	0.8x4.8	5.0	6.5	20.0				0.35
	A F2-6.4A	0.8x6.4	6.6	7.9	22.0				0.4
	A F2-8A	0.8x8.0	8.4	10.0	25.0				0.4
12-10 AWG 4-6 mm ²	F5-6.4A	0.8x6.4	6.6	7.9	24.0	13.0	6.5	3.4	0.4
	F5-9.5A	1.2x9.5	9.9	12.5	29.0				0.5

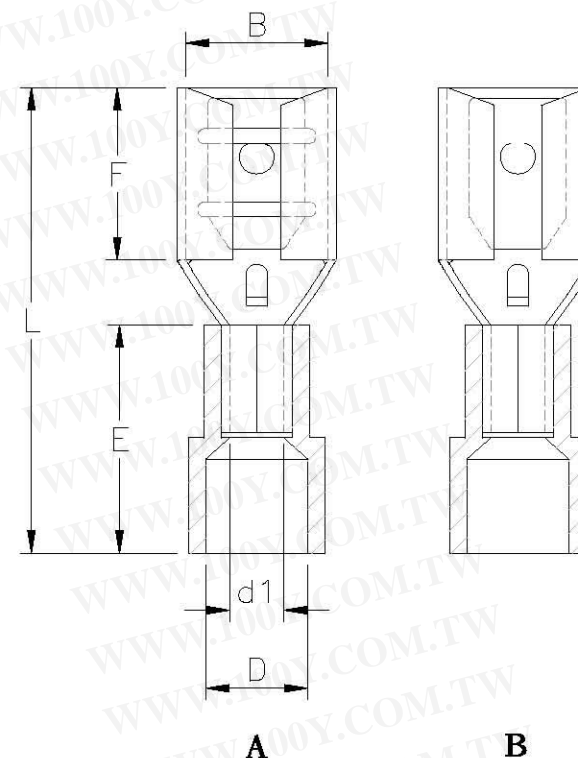


認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位UNIT

製圖 DRAFT: TINA



INSULATION:NYLON

m/m

設計 DESIGN: KEN

MATERIAL:BRASS

比例SCALE

核可 CHECKED: ANDY

TIN PLATING

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)