


電工端子系列

NON-INSULATED DIN 46234 RING TERMINALS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

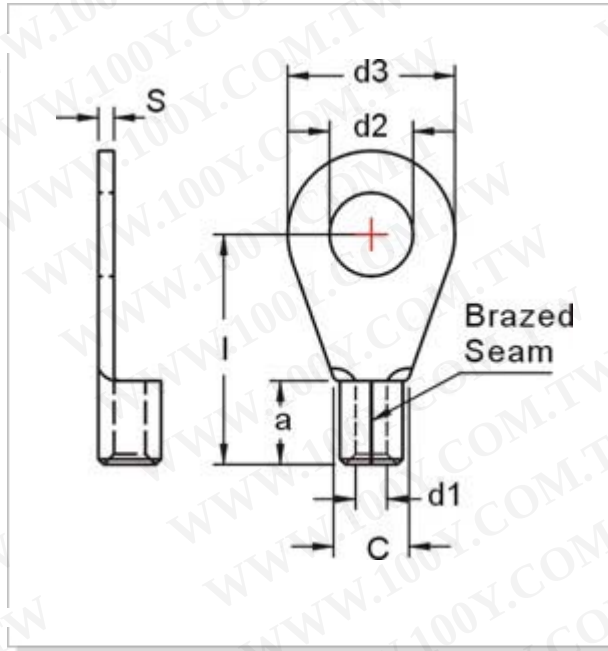

MAXIMUM ELECTRIC CURRENT:

A.W.G.	26	24	22	20	18	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	25	30	35	40
AMP.	5.5	7	9	12	17	18	30	35	50	70	95	12	17	23	26	31	36	40	44	50	54

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.	STU D SIZE	DIMENSION (mm)							Q'TYBOX
		d2	D3	I	A	C	d1	S		
26-22 A.W.G. 0.2-0.5 mm ²	 DRNB4-0.5	#8	4.3	6.5	12	4	2	1	0.5	1000
22-16 A.W.G. 0.5-1.5 mm ²	 DRNB4-1	#8	4.3	8	12	5	4	1.6	0.8	1000

Http://www.100y.com.tw											
16-14 A.W.G.		DRNB4-2.5	#8	4.3	8	12	5	4.5	2.3	0.8	1000
1.5-2.5 mm²											
12-10 A.W.G.		DRNB4-6	#8	4.3	8	14	6	6	3.6	1	1000
2.5-6 mm²											
22-16 A.W.G.		DRNB8-1	5/16	8.4	14	17	5	4	1.6	0.8	1000
0.5-1.5 mm²											
16-14 A.W.G.		DRNB8-2.5	5/16	8.4	14	17	5	4.5	2.3	0.8	1000
1.5-2.5 mm²											
12-10 A.W.G.		DRNB8-6	5/16	8.4	14	19	6	6	3.6	1	1000
2.5-6 mm²											
8 A.W.G.		DRNB8-10	5/16	8.4	14	20	8	8	4.5	1.1	500
10 mm²											
6 A.W.G.		DRNB8-16	5/16	8.4	14	22	10	10.5	5.8	1.2	500
16 mm²											
4 A.W.G.		DRNB8-25	5/16	8.4	16	25	11	12	7.5	1.5	250
25 mm²											
2 A.W.G.		DRNB8-35	5/16	8.4	16	26	12	15	9	1.6	200

35 mm ²											
1/0 A.W.G.	DRNB8-50	5/16	8.4	18	34	16	17	11	1.8	100	
50 mm ²											
2/0 A.W.G.	DRNB8-70	5/16	8.4	22	38	18	21	13	2	100	
70 mm ²											
3/0 A.W.G.	DRNB8-95	5/16	8.4	28	42	20	23	15	2.5	50	
95 mm ²											
4/0 A.W.G.	DRNB8-120	5/16	8.4	24	44	22	24	16.5	3	50	
120 mm ²											

勝 特 力 材 料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)